

# INSTALLATION INSTRUCTIONS FOR P1302-L

## For LED Semi-flush mount

### READ AND SAVE THESE INSTRUCTIONS

#### WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEU

#### ASSEMBLING THE FIXTURE (Fig.1)

- 1 Shut off power at the fuse box or circuit breaker. If necessary, remove the old fixture including the mounting hardware.
- 2 Carefully remove the fixture from the carton and check that all parts are included as show in Figure 1.
- 3 Thread the two screws (B) into the pre-drilled holes on the crossbar (A) (Part#A-010) spaced the same distance apart as the holes in canopy (E). Secure crossbar (A) to the junction box using mounting screw(C) (Size: 8\*32\*1/2"L). The side of the crossbar marked "GND" must face out.
- 4 Thread rod (G) onto nipple (S)

#### CONNECTING THE WIRES (Fig. 2)

- 5 Connect the electrical wire as shown in figure 3, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the ground wire from the hanger ball and mounting plate to it. Otherwise connect fixture ground wire directly to the crossbar using the green screw (D) provided. Tuck the wire connections neatly into the ceiling junction box as you hold the canopy towards the ceiling.

#### FINISHING THE INSTALLATION (Fig.1)

- 6 Align the canopy (E) onto screws (B) and secure with cap nuts (F).
- 7 Thread rod (K) to joint (R). Align glass (I) to rod (K) and secure with finial (J).

Your installation is now complete. Return power to the junction box and test the fixture.

**CAUTION/ATTENTION:** When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base (H) only.

#### Replacing LED module (Fig. 3)

The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig. 3)

**Warning: Turn off power at the circuit breaker before replacing LED module.**

- a. Loosen finial (J) and remove glass (I).
- b. Loosen rod (R), screws (Q), rubber washer (N2) and remove glass (P).
- c. Loosen hexagonal stud (O), rubber washer (N1). Carefully remove LED module (M) from pan (L) and disconnect the wire using screwdriver from wire connector (Z).
- d. Reverse steps a-c for installing the new LED module.

Note: The LED module should be provided by a specified supplier.

**IMPORTANT:** Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

**Dimmable with ELV and/or LED compatible wall dimmer switches**

Fig.1

Set: A-010

Crossbar

Mounting screw(2)

Green screw

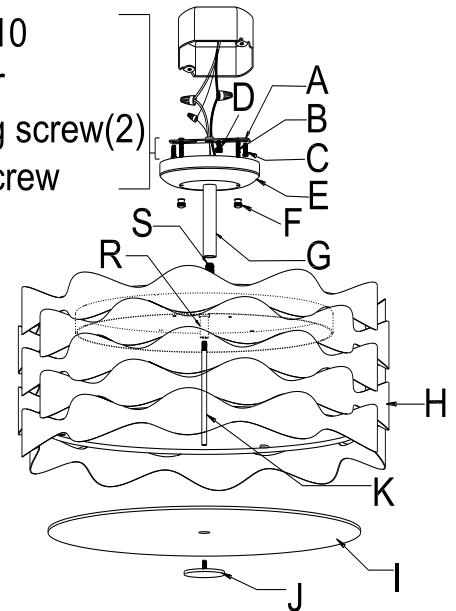


Fig.2




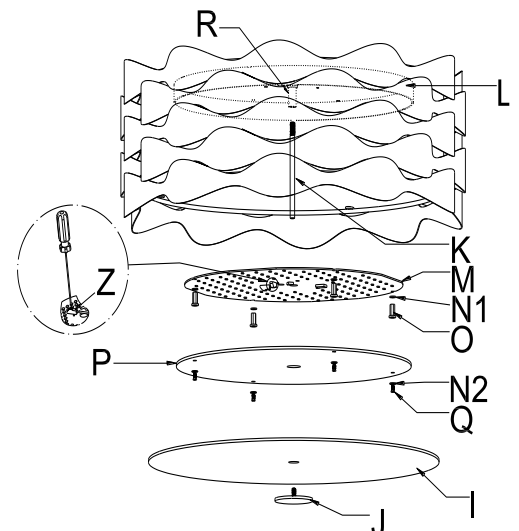
<p>FIXTURE WIRES Black or Smooth</p> 	<p>FIXTURE WIRES WHITE OR RIBBED</p> 	<p>FIXTURE WIRES Green or Bare Copper (Ground)</p> 
<p>HOUSE WIRES Black (Hot)</p>	<p>HOUSE WIRES White (Neutral)</p>	<p>HOUSE WIRES Green or Bare Copper (Ground)</p>

Fig.3



american  
lighting  
association