

# INSTALLATION INSTRUCTIONS

Item# P359-618-L (New. 12/12/2019)

**READ AND SAVE THESE INSTRUCTIONS**

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## PREPARATION (Fig. 1)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the existing fixture and its mounting hardware from the ceiling.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.

## ASSEMBLING THE FIXTURE WITH CHAIN LOOP (Fig. 1)

3. Determine the desired hanging height and thread rods (F1, F2 and F3) to threaded nipple (I) on fixture body. Attach canopy (D) by screwing onto rod (F1). Carefully pass the wires through each rod during assembly. Note: remove the threaded nipple if installing with one 6" rod only.
4. Thread screws (A) into the pre-drilled holes in the circular strap (B) spaced the same distance apart as the holes in the canopy (D).
5. Attach the circular strap (B) to the junction box using mounting screws (C) (Size: #8-32N\*L0.5"). The side of the circular strap marked "GND" must face out.
6. The support cable is provided to support the weight of the fixture while wiring. Align the fixture to circular strap (B) and attach hook (P) on the end of support cable (N) into a slot located on circular strap (B). Carefully allow the support cable to support the weight of the fixture while wiring.

## CONNECTING THE WIRES (Fig. 2)

7. Connect the electrical wires as shown in figure 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap (B) using the green screw provided.
8. Tuck the wire connectors neatly into the ceiling junction box and then raise the canopy to the ceiling.

## COMPLETING THE INSTALLATION (Fig. 1)

9. Slide canopy (D) over screws (A) and secure with knurled knobs (E).
10. Slide the glass shade (K) over the heat sink (J) and twist to secure it to the socket cup.

## Replacing LED module (Fig. 3)

The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig 3.)

- a. Shut off the power.
- b. Unscrew the glass shade (K) from heat sink (J)..
- c. Loosen screws (L) and remove the lens (M). Carefully remove the LED module (O) from the heat sink (J).
- d. Press the button of the printed "L" quick connector on LED module (O) with screwdriver (not included) to disconnected the black wire, and then disconnect the white wire from the printed "N" quick connector on LED module (O).
- e. Reverse steps a-d for installing the new LED module.

Your installation is now complete. Return power to the junction box and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

**IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.**

Fig. 1

Set# A-020-A

- Circular strap
- Ground screw
- Mounting screw\*2

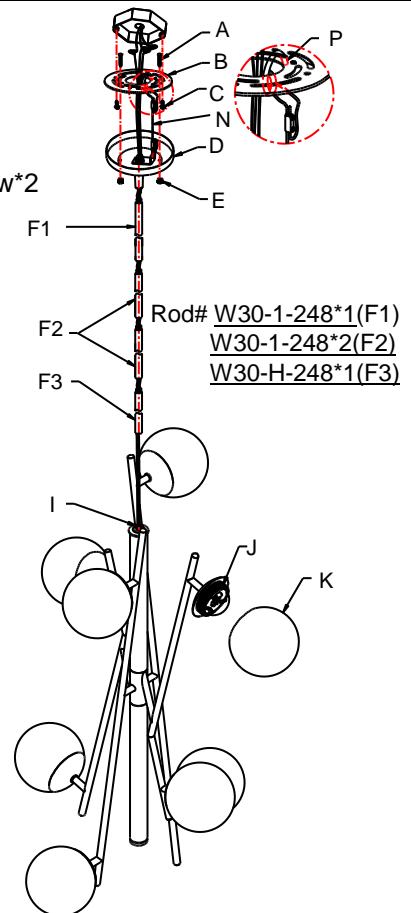


Fig. 2


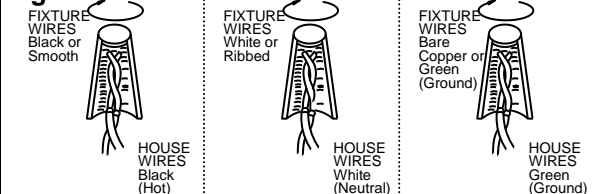


Fig. 3

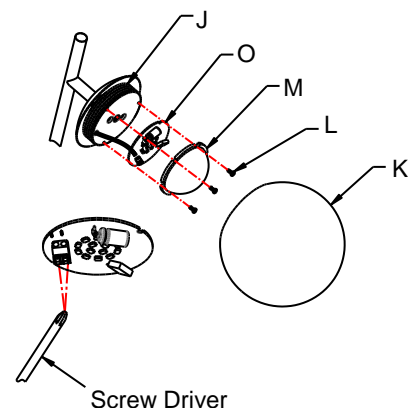

american lighting association

Dimmable with ELV and/or LED compatible wall dimmer switches.

LA-3182E