


Submitted Model No.: _

Specific Features: _

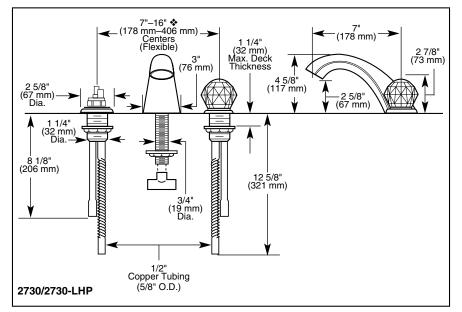

✤ For Lever Handles Use 10"-16" Centers.

DELTA. BATH VALVES

Two Handle Roman Tub Mid-Size Faucet

- Innovations[®] Series
- Complete Trim and Rough
- Three Hole Installation
- Flexible Widespread Mount on Deck or Ledge
- 7" (178 mm) Long, 4 5/8" High (117 mm) Rigid Slip-On Spout
- Temperature and Volume Controlled with Handles






COMPLIES WITH:

- ASME A112.18.1
- CSA B125
 Indicator ADA comp
- Indicates ADA compliance to CABO/ANSI A117.1
- IAPMO Listed
- CSA Certified

STANDARD SPECIFICATIONS:

- Two handle Roman Tub faucet for concealed mounting.
- Clear knob handles with red/blue indicators or LHP–Less Handle Program.
 See available handle options on back.
- See available handle options on back.
- Flexible widespread mount on deck or ledge.Solid fabricated brass end valves and spout body.
- 7" (178 mm) long, 4 5/8" (117 mm) high
- slip-on rigid spout.
- 5/8" O.D. copper inlet supply tubes.
- 5/8" O.D. corrugated copper supply outlet tubes.
- Control mechanism shall be of the rotating cylinder type with stainless steel plate and 180° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- Hot and cold stems are interchangeable.
- Temperature and volume controlled with handles.
- All operating parts shall be replaceable from the top.
 Conventional rough-in adjusts to 1 1/4" (32 mm)
- maximum deck thickness.



Standard Features	2730	2730-CBLHP	2730-LHP	2730-PB	2730-PBLHP	2730-WHLHP
Washerless	•	٠	٠	٠	٠	•
Three Hole Installation	•	٠	٠	٠	٠	•
Flexible Widespread Mount on Deck or Ledge	•	٠	٠	٠	٠	٠
Conventional Rough-In—Adjusts to 1 1/4" (32 mm) Maximum Deck Thickness	•	•	•	•	•	•
7" (178 mm) Long, 4 5/8" (117 mm) High Slip-On Rigid Spout	•	٠	٠	٠	٠	•
Stream Straightener	•	٠	٠	٠	٠	•
Clear Knob Handles with Red/Blue Indicators (H61/H61PB)	•			٠		
Less Handle Program—See Handle Kit Options*		٠	٠		٠	•
2 5/8" (67 mm) Diameter Decorative Handle Bases	•	٠	۲	٠	٠	٠
5/8" O.D. Copper Supply Inlet Tubes	•	٠	۲	۲	۲	•
5/8" O.D. Corrugated Copper Supply Outlet Tubes	•	٠	٠	٠	٠	•
Chrome Finish	•		۲			
Chrome and Brilliance® Polished Brass Finish	1	٠				
Brilliance® Polished Brass Finish	1			٠	٠	
White Finish						•


Available Options for Field Conversion:

• NOTE: Standard decorative handle base is 2 5/8" (67 mm) diameter.


- Optional 2 1/2" (64 mm) diameter base with gasket. Cannot be used with RP18235 thick deck rough-in. Order RP18300▲.
- Optional 3" (76 mm) diameter base with gasket. Order RP18543
- Roman Tub hand showers, bath waste assemblies and bath accessories are available separately.
- Designate proper finish suffix.

Installation Aids:

- The Helpful Hand for 4" (102 mm) to 16" (406 mm) centers-aligns widespread handles. Order RP22132.
- Thick tile mounting aid-adds 1" (25 mm) to RP18227 only. Order RP18504 or RP11099 (bulk).
- Thick tile installation aid for RP18227 only. Rigid plastic template installs on deck prior to mud/tile. Order RP27972 or RP28009 (bulk).
- 10" fixed conventional rough-in adjusts to 1 1/4" (32 mm) maximum deck thickness. Order RP23601.
- Thick tile rough-in—mounts to deck prior to mud and tile-adjusts to 3 1/4" (83 mm) maximum deck thickness. Requires RP16867 wrench to adjust. Order RP18235.
- End valve adjustment wrench (for RP18227 and RP18235 rough-in kits). Order RP16867.

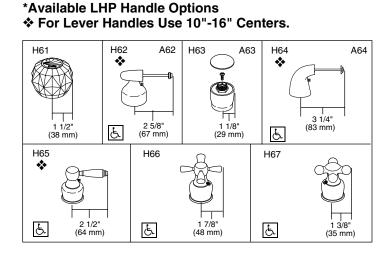

*Available LHP Handle Accent Options



Indianapolis, Indiana 46280 A Division of Masco Corporation of Indiana © 2003 Masco Corporation of Indiana