

Submitted Model No.: \_\_\_\_\_

Specific Features: \_\_\_\_\_

Part #	Description	Models
RP19754	1.5 gpm aerator assy 15/16"-27 male	585, 3585, 586, 3586, 2530, 3530, 4530, (500, 501, 502, 505, 520, 522, 523, 524, 525, 540, 541, 542, 544, non-DST), 3544, 3543, 2522, 2521, 2520, 2502, 2500, 583, 2583, 3483, 3582, 582
RP51345	1.5 gpm aerator assy M16.5x1 male	(538 non-DST), 2538, 3538, 4538, 2592, 3592, 4592 Wrench Included
RP52216	1.5 gpm aerator assy M21.5x1 male	2551, 3551, 4551 (500, 501, 502, 511, 515, 516, 520, 522, 523, 540, 541, 542, 544 DST) Wrench RP52217
RP53339	1.5 gpm aerator assy M21.5x1 male	578, 579 non-DST Wrench RP52217
RP53343	1.5 gpm aerator assy 3/4"-27 female	555, 755, 2555, 3555, 4555, 2155
RP53344	1.5 gpm aerator assy 15/16"-27 male	2540, 3540, 4540
RP53346	1.5 gpm aerator assy 55/64"-27 female	2569, 3569, 4569
RP53347	1.5 gpm aerator assy 13/16"-27 male	2578, 3578, 4578, 2575, 3575, 4575
RP54977	1.5 gpm aerator assy 13/16"-27 male	(538, 578, 579, 551, 592, 751, 792, 2578, 3578, 15938T DST) Wrench RP52217
RP60729	0.5 gpm M21.5x1 male	(500, 501, 502, 520, 522, 523, 524, 525 DST) Wrench RP52217
RP60983	1.5 gpm aerator assy M21.5x1 male	(500, 501, 502, 520, 522, 523, 524, 525 DST) Wrench RP52217
RP61340	1.5 gpm aerator 15/16"-27 male	B501LF, B510LF, B512LF, (B2510LF, B2512LF - Male), B2596LF, B3596LF
RP62734	1.5 gpm insert	All handshowers
RP63886	1.0 gpm aerator M21.5x1 male	2551, 3551, 4551 (500, 501, 502, 511, 515, 516, 520, 522, 523, 540, 541, 542, 544 DST) Wrench RP52217
RP64019	1.5 gpm aerator 15/16"-27 female	B2510LF, B2512LF - Female

▲ Designate Proper Finish Suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.specselect.com](http://www.specselect.com) for finish options and product availability.

DSP-L-AERATORS Rev. B



# WATER EFFICIENT LAVATORY AERATORS

## STANDARD SPECIFICATIONS:

- Maximum 0.5 gpm flowrate @ 60 PSI.
- Maximum 1.0 gpm flowrate @ 60 PSI.
- Maximum 1.5 gpm flowrate @ 60 PSI.
- Water efficient uses 30% less than industry standard of 2.2 gpm @ 60 PSI per ASME.


## WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.



## COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1

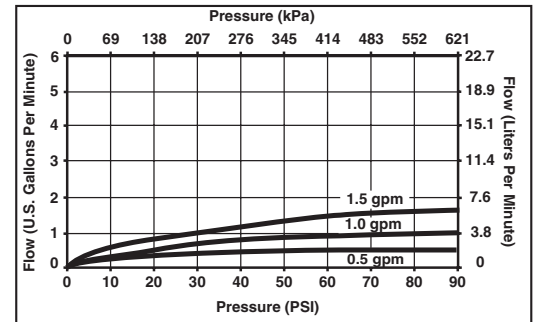

55 E. 111th Street, Indianapolis, Indiana 46280  
350 South Edgeware Road, ST. Thomas, ON N5P 4C4  
© 2010 Masco Corporation of Indiana