

**DIGITAL NAVIGATION**

[Ordering Tree](#) [nLight Platform](#) [Controls](#) [Photometrics](#) [Performance Data](#)

**FEATURES & SPECIFICATIONS**

**INTENDED USE** — The BLT Best-in-Value Low Profile LED luminaire features a popular center basket design that offers a clean, versatile style and volumetric distribution. High efficacy LED light engines deliver energy savings and low maintenance compared to traditional sources. An extensive selection of configurations and options make the BLT the perfect choice for many lighting applications including schools, offices and other commercial spaces, retail, hospitals and healthcare facilities. The low profile BLT design (2-3/8") also makes it an excellent choice for renovation projects.

**CONSTRUCTION** — Prior to fabrication, BLT components are coated with a proprietary paint blend and die-formed for dimensional consistency.

The BLT reflector is available in both smooth and ribbed finishes. For a ribbed finish, add RIB to the end of the product description. See the ordering tree below for additional detail.

End plates contain easy-to-position integral T-bar clips for securely attaching the luminaire to the T-grid. For additional T-grid security, optional screw on T-bar clips are available.

Diffusers are extruded from impact modified acrylic for increased durability.

LED boards and drivers are accessible from the plenum.

**OPTICS** — Volumetric illumination is achieved by creating an optimal mix of light to walls, partitions and vertical and horizontal work surfaces – rendering the interior space, objects and occupants in a more balanced, complimentary luminous environment. High performance extruded acrylic diffusers conceal LEDs and efficiently deliver light in a volumetric distribution. Four diffuser choices available – curved and square designs with ribbed or a smooth frosted finish.

**ELECTRICAL** — Long-life LEDs, coupled with high-efficiency drivers, provide superior quantity and quality of illumination for extended service life. 80% LED lumen maintenance at 60,000 hours (L80/60,000). Color Variation within 3-step MacAdam ellipse (3SDCM).

**Non-Configurable BLT:** Generic 0-10 volt dimming driver. Dims to 10%

**Configurable BLT:** available in High Efficiency (HE) versions for applications where a lower wattage (over the standard product) is required. The High Efficiency versions deliver >130 LPW and can be specified via the Lumen Package designations in the Ordering Information below.

eldoLED driver options deliver choice of dimming range, and choices for control, while assuring flicker-free, low-current inrush, 89% efficiency and low EMI.

Optional integrated nLight® controls make each luminaire addressable - allowing them to digitally communicate with other nLight enabled controls such as dimmers, switches, occupancy sensors and photocontrols. Connection to nLight is simple. It can be accomplished with integrated nLight AIR wireless r10 and rE57 sensors, or through standard Cat-5 cabling. nLight offers unique plug-and-play convenience as devices and luminaires automatically discover each other and self-commission. nLight AIR is commissioned easily through an intuitive model app.

Lumen Management: Unique lumen management system (option N80) provides on board intelligence that actively manages the LED light source so that constant lumen output is maintained over the system life, preventing the energy waste created by the traditional practice of over-lighting.

Step-level dimming option allows system to be switched to 50% power for compliance with common energy codes while maintaining fixture appearance.

Driver disconnect provided where required to comply with US and Canadian codes.

**SENSOR** — **Integrated sensor (individual control):** Sensor Switch MSD7ADCX ((Passive infrared (PIR)) or MSDPD7ADCX ((PIR/Microphonics Dual Tech (PDT)) integrated occupancy sensor/automatic dimming photocell allows the luminaire to power off when the space is unoccupied or enough ambient light is entering the space. See page 4 for more details on the integrated sensor.

**Integrated Sensor (nLight Wired Networking):** This sensor is nLight-enabled, meaning it has the ability to communicate over an nLight network. When wired, using CAT-5 cabling, with other nLight-enabled sensors, power packs, or WallPods, an nLight control zone is created. Once linked to a Gateway, directly or via a Bridge, the zone becomes capable of remote status monitoring and control via SensorView software. See page 4 for the nLight sensor options.

**Integrated Smart Sensor (nLight Air Wireless Platform):** The RES7 sensor is nLight AIR enabled, meaning it has the ability to communicate over the wireless nLight control platform. It is available with an automatic dimming photocell, and either a digital PIR or a microphonics (PDT) dual technology occupancy sensor. It pairs to other luminaires and wall switches through our mobile app, CLAIRITY, which allows for simple sensor adjustment. See page 4 for more details on the Integrated Smart Sensor.

**INSTALLATION** — The BLT's low profile design of only 2-3/8" provides increased installation flexibility especially in restrictive plenum applications. The BLT fits into standard 15/16" and narrow 9/16" T-grid ceiling systems.

Suitable for damp location.

For recessed mounting in hard ceiling applications, Drywall Grid Adapters (DGA) are available as an accessory. See Accessories section.

**LISTINGS** — CSA Certified to meet U.S. and Canadian standards. IC rated.

DesignLights Consortium® (DLC) Premium qualified product. Not all versions of this product may be DLC Premium qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

**WARRANTY** — 5-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/resources/terms-and-conditions](http://www.acuitybrands.com/resources/terms-and-conditions)

**NOTE:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Catalog Number
Notes
Type


**BLT Series LED**

**2BLT2**

2' x 2'  
LED



ADP Diffuser Option



Ribbed Reflector Option



eldoLED




*Specifications*

Length: 23-3/4 (60.3)

Width: 23-3/4 (60.3)

Depth: 2-3/8 (6.0)

Depth with Air supply/return: 2-3/4 (6.9)

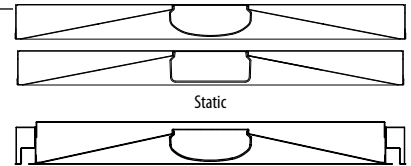

All dimensions are inches (centimeters) unless otherwise specified.

Air Supply/Return

**Embed nLight controls today. Prepare for tomorrow.**

**Now**

- User-friendly install
- Enhanced energy savings
- Code compliance

**Tomorrow**

- Scalability
- Space configuration
- Future-ready

**Capable Luminaire**

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight® control networks when ordered with drivers marked by a **shaded background**\*
- This luminaire is part of an A+ Certified solution for nLight control networks, providing advanced control functionality at the luminaire level, when selection includes driver and control options marked by a **shaded background**\*

To learn more about A+, visit [www.acuitybrands.com/aplus](http://www.acuitybrands.com/aplus).

\*See ordering tree for details

# 2BLT Volumetric Recessed Lighting 2'x2'



A+ Capable options indicated by this color background.

## ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: 2BLT2 33L ADP EZ1 LP835

Series	Air function	Lumens <sup>2</sup>	Diffuser	Voltage	Driver	Color temperature
2BLT2 2X2 BLT	(blank) Static A Air supply/return <sup>1</sup>	<b>Standard efficiency<sup>3,4</sup> (&gt;125 LPW)</b> 20L 2000 33L 3300 40L 4000 48L 4800	<b>High efficiency<sup>5,6</sup> (&gt;130 LPW)</b> 20LHE 2000 33LHE 3300 40LHE 4000 48LHE 4800 <b>Includes trim rings to match sensed version</b> ADPT Curved, ribbed ADSM Curved, smooth SDP Square, ribbed SDSM Square, smooth SDPT Curved, ribbed SDSMT Square, smooth	(blank) MVOLT 120 120V 277 277V 347 347V <sup>7</sup>	EZ1 eldoLED dims to 1% (0-10 volt dimming) GZ1 Dims to 1% (0-10V dimming) <sup>8</sup> GZ10 Dims to 10% (0-10V dimming) <sup>8</sup> SLD Step-level dimming <sup>9</sup>	LP830 82CRI, 3000 K LP835 82CRI, 3500 K LP840 82CRI, 4000 K LP850 82CRI, 5000 K LP930 90CRI, 3000K LP935 90CRI, 3500K LP940 90CRI, 4000K LP950 90CRI, 5000K


nLight Interface	Control <sup>12</sup>	Individual Control
<b>nLight Wired</b> (blank) no nLight <sup>®</sup> interface N80 nLight with 80% lumen management N80EMG nLight with 80% lumen management For use with generator supply EM power <sup>10</sup> N100 nLight without lumen management N100EMG nLight without lumen management For use with generator supply EM power <sup>10</sup> <b>nLight Wireless</b> (blank) no nLight <sup>®</sup> interface NLTAIR2 nLight AIR Generation 2 enabled <sup>11</sup>	<b>nLight Wired</b> (blank) No sensor control NES7 nLight™ nES 7 PIR integral occupancy sensor <sup>13</sup> NESPDT7 nLight™ nES PDT 7 dual technology integral occupancy control <sup>13</sup> NES7ADCX nLight™ nES 7 ADCX PIR integral occupancy sensor with automatic dimming photocell <sup>13</sup> NESPDT7ADCX nLight™ nES PDT 7 dual technology integral occupancy sensor with automatic dimming photocell <sup>13</sup> <b>nLight Wireless</b> RES7 nLight AIR PIR integral occupancy sensor with automatic dimming photocell for Networking Capabilities RES7PDT nLight AIR microphonics dual technology occupancy sensor with automatic dimming photocell RIO nLight AIR radio module without sensor RES7EM nLight AIR PIR integral occupancy sensor with automatic dimming photocell and UL924 Emergency Operation, via power interrupt detection <sup>25</sup> RES7PDTEM nLight AIR microphonics dual technology occupancy sensor with automatic dimming photocell and UL924 Emergency Operation, via power interrupt detection <sup>25</sup> RIOEM nLight AIR radio module less sensor, with UL924 Emergency Operation, via power interrupt detection <sup>25</sup>	MSD7ADCX PIR integral occupancy sensor with automatic dimming control photocell <sup>14</sup> MSDPDT7ADCX PDT integral occupancy sensor with automatic dimming control photocell <sup>14</sup>

Standby Mode	Options																											
NOC NOC Occupancy sensor disabled <sup>15</sup>	<table border="0"> <tr> <td><b>RIB Ribbed reflector</b></td> <td>CP Chicago plenum<sup>18</sup></td> <td>GLR Fast-blowing fuse<sup>21</sup></td> </tr> <tr> <td>EL7L 700 lumen battery pack (Noncompliant with CA T20)<sup>16</sup></td> <td>BGTD Bodine Generator Transfer Device<sup>19</sup></td> <td>GMF Slow-blowing fuse<sup>21</sup></td> </tr> <tr> <td>EL14L 1400 lumen battery pack (Noncompliant with CA T20)<sup>16</sup></td> <td>PWS1836 6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit</td> <td>NPLT Narrow pallet</td> </tr> <tr> <td>EL14LSD 1400 lumen battery pack with self-diagnostic testing feature (Noncompliant with CA T20)<sup>16,17</sup></td> <td>PWS1846 6' pre-wire, 3/8" diameter, 18 gauge, 2 circuit</td> <td>RRL_ RELOC<sup>®</sup>-ready luminaire<sup>22</sup></td> </tr> <tr> <td>E10WLCP EM Self-Diagnostic battery pack, 10W Constant Power, Certified in CA Title 20 MAEDBS<sup>16</sup></td> <td>PWS1846 PWSLV Two cables: one 6' pre-wire, 3/8" diameter, 18 gauge, 2 circuits; one 6' pre-wire, 3/8" diameter, 18 gauge, purple and gray<sup>20</sup></td> <td>LATC Earthquake clip</td> </tr> <tr> <td></td> <td>PWS1856LV 6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit w/low voltage purple and grey wires<sup>20</sup></td> <td>DWAM Anti-Microbial paint</td> </tr> <tr> <td></td> <td></td> <td>JP28 Job packaging<sup>23</sup></td> </tr> <tr> <td></td> <td></td> <td>JP36 Job packaging</td> </tr> <tr> <td></td> <td></td> <td>IP5X Gasketed diffuser compartment to meet IP5X rating<sup>24</sup></td> </tr> </table>	<b>RIB Ribbed reflector</b>	CP Chicago plenum <sup>18</sup>	GLR Fast-blowing fuse <sup>21</sup>	EL7L 700 lumen battery pack (Noncompliant with CA T20) <sup>16</sup>	BGTD Bodine Generator Transfer Device <sup>19</sup>	GMF Slow-blowing fuse <sup>21</sup>	EL14L 1400 lumen battery pack (Noncompliant with CA T20) <sup>16</sup>	PWS1836 6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit	NPLT Narrow pallet	EL14LSD 1400 lumen battery pack with self-diagnostic testing feature (Noncompliant with CA T20) <sup>16,17</sup>	PWS1846 6' pre-wire, 3/8" diameter, 18 gauge, 2 circuit	RRL_ RELOC <sup>®</sup> -ready luminaire <sup>22</sup>	E10WLCP EM Self-Diagnostic battery pack, 10W Constant Power, Certified in CA Title 20 MAEDBS <sup>16</sup>	PWS1846 PWSLV Two cables: one 6' pre-wire, 3/8" diameter, 18 gauge, 2 circuits; one 6' pre-wire, 3/8" diameter, 18 gauge, purple and gray <sup>20</sup>	LATC Earthquake clip		PWS1856LV 6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit w/low voltage purple and grey wires <sup>20</sup>	DWAM Anti-Microbial paint			JP28 Job packaging <sup>23</sup>			JP36 Job packaging			IP5X Gasketed diffuser compartment to meet IP5X rating <sup>24</sup>
<b>RIB Ribbed reflector</b>	CP Chicago plenum <sup>18</sup>	GLR Fast-blowing fuse <sup>21</sup>																										
EL7L 700 lumen battery pack (Noncompliant with CA T20) <sup>16</sup>	BGTD Bodine Generator Transfer Device <sup>19</sup>	GMF Slow-blowing fuse <sup>21</sup>																										
EL14L 1400 lumen battery pack (Noncompliant with CA T20) <sup>16</sup>	PWS1836 6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit	NPLT Narrow pallet																										
EL14LSD 1400 lumen battery pack with self-diagnostic testing feature (Noncompliant with CA T20) <sup>16,17</sup>	PWS1846 6' pre-wire, 3/8" diameter, 18 gauge, 2 circuit	RRL_ RELOC <sup>®</sup> -ready luminaire <sup>22</sup>																										
E10WLCP EM Self-Diagnostic battery pack, 10W Constant Power, Certified in CA Title 20 MAEDBS <sup>16</sup>	PWS1846 PWSLV Two cables: one 6' pre-wire, 3/8" diameter, 18 gauge, 2 circuits; one 6' pre-wire, 3/8" diameter, 18 gauge, purple and gray <sup>20</sup>	LATC Earthquake clip																										
	PWS1856LV 6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit w/low voltage purple and grey wires <sup>20</sup>	DWAM Anti-Microbial paint																										
		JP28 Job packaging <sup>23</sup>																										
		JP36 Job packaging																										
		IP5X Gasketed diffuser compartment to meet IP5X rating <sup>24</sup>																										

- Notes**
- Consult factory for airflow data.
  - Approximate lumen output.
  - All versions may not achieve 125+ LPW. Refer to photometry on [www.acuitybrands.com](http://www.acuitybrands.com).
  - Air supply/return option, 90 CRI, and versions with integral sensor trim rings may not achieve 125 LPW.
  - All versions may not achieve 130+ LPW. Refer to photometry on [www.acuitybrands.com](http://www.acuitybrands.com).
  - Air supply/return option, 90 CRI, and versions with integral sensor trim rings may not achieve 130 LPW.
  - Not available with SLD, EL7L, EL14L or E10WLCP options.
  - GZ1 and GZ10 not available with any Control or Sensor options
  - Not available with N80, N80EMG, N100, N100EMG, NLTAIR2, or occupancy control.
  - nLight EMG option requires a connection to existing nLight network. Power is provided from a separate N80 or N100 enabled fixture. Must order with RES7, RES7PDT or RIO module. Must order with EZ1 driver.
  - Must specify diffuser with trim rings. See sensor options on page 4.
  - Requires N80, N80EMG, N100, or N100EMG. Must order with EZ1 driver.
  - Only available with EZ1 driver option. 0-10v dimming wires not accessible via access plate.
  - Can only be ordered in conjunction with EZ1, NLTAIR2, RES7/RES7PDT. Occupancy sensor disabled at factory but can be re-enabled upon commissioning.
  - When using pre-wire option, use PWS1846 or PWS1846 PWSLV.
  - For more information, please see the [PSSD2 specification sheet](#).
  - Not available with N80, N80EMG, N100, or N100EMG.
  - Must specify voltage. Requires BSE labeling, voltage specific. Consult factory for options.
  - Not available with nLight wired/wireless network or individual controls.
  - Must specify voltage, 120 or 277, with GLR and GFM fusing.
  - For ordering logic consult [RRL\\_2013](#).
  - Only available with options: NES7, NESPDT7, NES7ADCX, NESPDT7ADCX, MSD7ADCX, MSDPDT7ADCX, RES7, RES7PDT, RIO.
  - Not available with air supply/return or Wired Networking (NES\_) and Individual Control (MSD\_) sensors.
  - See UL924 Sequence of Operation chart on page 3.

# 2BLT Volumetric Recessed Lighting 2'x2'

## Multiple Diffuser Options




## Non-Configurable BLT

Stock/MTO	Catalog Description *	UPC	Lumens	Wattage	LPW	Color Temperature	Voltage	Pallet Qty
Stock	2BLT2 33L ADP LP835	190887529708	3332	26	127	3500K/82 CRI	120-277	56
	2BLT2 33L ADP LP840	190887529739	3385	26	129	4000K/82CRI	120-277	56
	2BLT2 33L ADP EL14L LP835	190887529890	3332	26	127	3500K/82CRI	120-277	56
	2BLT2 33L ADP EL14L LP840	190887529937	3385	26	129	4000K/82CRI	120-277	56
MTO	2BLT2 33L ADP 347 LP835	193047451758	3332	26	127	3500K/82 CRI	347	56
	2BLT2 33L ADP 347 LP840	193047201193	3385	26	129	4000K/82CRI	347	56

\*Generic 0-10V Dimming to 10%.

MOUNTING DATA	
Ceiling Type	Appropriate Trim Type
Exposed grid tee (1' and 9/16")	G
Concealed grid tee	G
Plaster or plasterboard	G*



\*DGA accessory available to provide ceiling trim flange and fixture support for plaster or plasterboard ceiling. Recommended rough-in dimensions for DGA installation is 24-3/4" x 24-3/4" (Tolerance is +1/8", -0").

### UL924 Sequence of Operation

- For 90 minutes following any complete AC power interruption >200 ms:
- Digital dimming is commanded to high end trim level.
  - Device ignores wireless lighting control commands.

## Accessories & Replacement Parts

Accessories: Order as separate catalog number.	
DGA22	Drywall grid adapter for 2x2 recessed fixture
2X2SMKSH PAF	Surface Mount Troffer Kit Post Paint


Replacement Parts: Order as separate catalog number.		
*247WJV	2DBLT24 ADP LENS ASSEMBLY	2 ft. replacement lens
*249P2P	2DBLT24 SDP LENS ASSEMBLY	2 ft. replacement lens
*249P2W	2DBLT24 ADSM LENS ASSEMBLY	2 ft. replacement lens
*249P32	2DBLT24 SDSM LENS ASSEMBLY	2 ft. replacement lens
*237LT1	2DBLT24 ADPT LENS ASSEMBLY	2 ft. replacement lens
*237LT3	2DBLT24 SDPT LENS ASSEMBLY	2 ft. replacement lens
*237LT5	2DBLT24 ADSMT LENS ASSEMBLY	2 ft. replacement lens
*237LT7	2DBLT24 SDSMT LENS ASSEMBLY	2 ft. replacement lens
*237LT9	2DBLT24 ADPT SENSOR LENS ASSEMBLY	2 ft. replacement lens
*237M4Y	2DBLT24 SDPT SENSOR LENS ASSEMBLY	2 ft. replacement lens
*237M57	2DBLT24 ADSMT SENSOR LENS ASSEMBLY	2 ft. replacement lens
*237M5H	2DBLT24 SDSMT SENSOR LENS ASSEMBLY	2 ft. replacement lens

# 2BLT Volumetric Recessed Lighting 2'x2'

## nLight Platform

nLight embedded fixtures offer:	Customers get:
Manual Dimming	Convenience and visual comfort for occupants
Motion Sensing and/or Daylight Harvesting	Energy savings and code compliance
Fixture or Group Level Control	Ability to configure lighting to the space requirements
Flexibility	Ease of fixture moves, adds and changes
Wireless Wall Switch (nLight AIR Only)	Ease and flexibility of placement
Astronomical and Time of Day Scheduling	Energy savings and building security
Scalable Solution	nLight controls to grow with your business
Future-Ready	nLight platform to set foundation for future upgrades and capabilities

## nLight Air Wireless

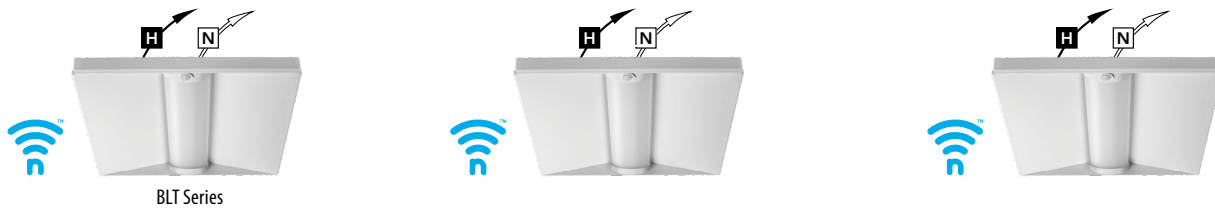


### Simple as 1,2,3

1. Install the nLight® AIR fixtures with embedded smart sensor
2. Install the wireless battery-powered wall switch
3. With CLAIRITY app, pair the fixtures with the wall switch and if desired, customize the sensor settings for the desired outcome



## nLight Wired Networking

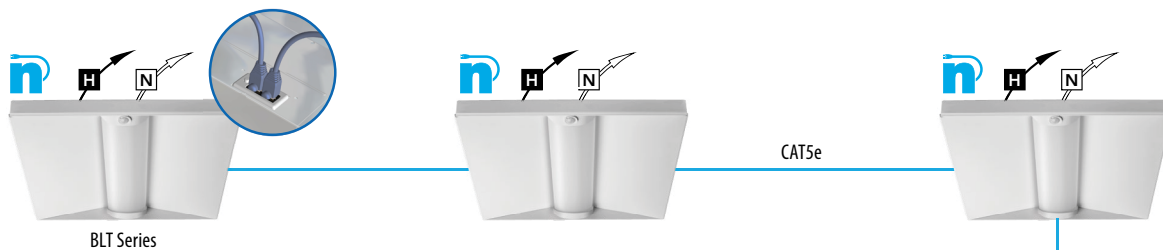

### Simple as 1,2,3


1. Install the nLight® Wired fixtures with embedded control
2. Install the nLight Wired wall switch
3. Connect the fixtures using standard CAT5e cables and the devices will automatically discover each other and work (plug and play)

# 2BLT Volumetric Recessed Lighting 2'x2'

Sensor Options					
Option	Automatic Dimming Photocell	Occupancy Sensing		nLight Wired Networking	nLight AIR Networking
		PIR	PDT		
MSD7ADCX	X	X			
MSDPDT7ADCX	X		X		
NES7		X		X	
NES7ADCX	X	X		X	
NESPDT7			X	X	
NESPDT7ADCX	X		X	X	
RES7	X	X			X
RESPDT7	X	X	X		X

## Sensor Coverage Pattern Mini 360° Lens

- Recommended for walking motion detection from mounting heights between 8 ft (2.44 m) and 20 ft (6.10 m)
- Initial detection of walking motion along sensor axes at distances of 2x the mounting height up to 15 ft (4.57 m) and
- 1.75x up to 20 ft (6.10 m).
- Provides 12 ft (3.66 m) radial detection of small motion when mounted at 9 ft (2.74 m)
- Initial detection will occur earlier when walking across sensor's field of view than when walking directly at sensor

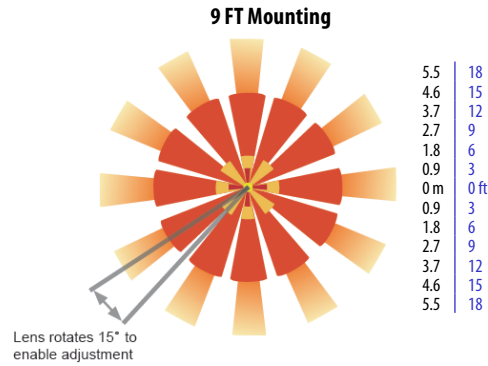

### Integrated Sensor with Individual Control

The MSD7ADCX PIR occupancy sensor/automatic dimming photocell is ideal for areas without obstructions and where daylight harvesting may be desired. Suggested applications include, but not limited to, hallways, corridors, storage rooms, and breakrooms or other areas where people are typically moving.

The MSDPDT7ADCX PIR/Microphonics Dual Tech occupancy sensor/automatic dimming photocell is ideal for areas with obstructions and where daylight harvesting is desired. Suggested applications include, but not limited to, open offices, private offices, classrooms, public restrooms, and conference rooms.

### nLight AIR Wireless


nLight AIR is the ideal solution for retrofit or new construction spaces where adding additional wiring can be labor intensive and nLight AIR is available with or without an integral sensor. The integrated rES7 or rES7PDT smart sensors are part of each luminaire in the nLight AIR network, which can be grouped to control multiple luminaires. The granularity of control with the digital PIR occupancy detection and daylight sensing makes a great solution for any application.

### nLight Wired Networking

The nES 7 is ideal for small rooms without obstructions or areas with primarily walking motion. Ideal areas include hallways, corridors, storage rooms, and breakrooms. Additionally, the nES7ADCX includes an integrated photocell, which enables daylight harvesting controls.


For areas like restrooms, private offices, open offices, conference rooms or any space with obstructions, the nES PDT 7 dual technology sensor is recommended. The nES PDT 7 utilizes both PIR (passive infrared) and Microphonics technologies to detect occupancy. Additionally, the nESPDT7ADCX includes an integrated photocell, which enables daylight harvesting controls which is ideal for areas where windows are present.

### Sequence of Operation (MSD7 Sensor)

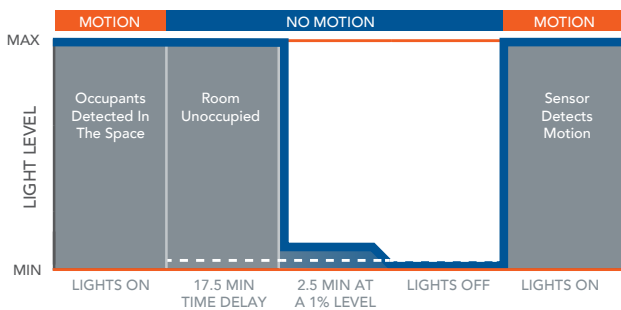

\*The presetting on the automatic dimming photocell is 5fc.

### Sequence of Operation (nES7 and rES7 and Sensor)

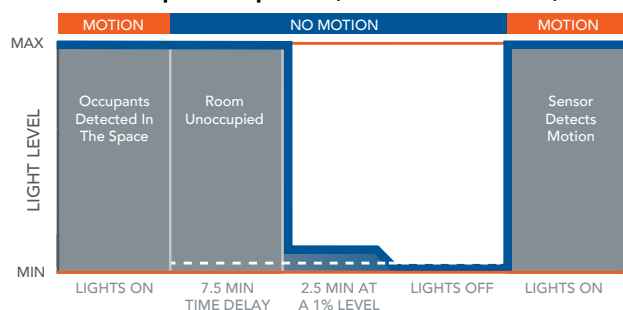

\*The presetting on the automatic dimming photocell is 5fc (NES7) and 10fc (RES7).

# 2BLT Volumetric Recessed Lighting 2'x2'

## Controls Accessories

### nLight® Wired Control Accessories:

Order as separate catalog number. Visit [www.acuitybrands.com/products/controls/nlight](http://www.acuitybrands.com/products/controls/nlight).


WallPod stations	Model number	Occupancy sensors	Model number
On/Off	nPODMA [Color]	Small motion 360°, ceiling (PIR / dual tech)	nCM 9 RJB / nCM PDT 9 RJB
On/Off & raise/lower	nPODMA DX [Color]	Large motion 360°, ceiling (PIR / dual tech)	nCM10 RJB / nCM PDT 10 RJB
Graphic touchscreen	nPOD TOUCH [Color]	Wall switch with raise/lower	nWSX PDT LV DX [color]
Photozell controls	Model number	Cat-5 cable (plenum rated)	Model number
Full range dimming	nCM ADCX RJB	10' cable	CATS 10FT J1
		30' cable	CATS 30FT J1

### nLight® AIR Control Accessories:

Order as separate catalog number. Visit [www.acuitybrands.com/products/controls/nlightair](http://www.acuitybrands.com/products/controls/nlightair).

Wall switches	Model number
On/Off single pole	rPODBA [color] G2
On/Off two pole	rPODB A2P [color] G2
On/Off & raise/lower single pole	rPODBA DX [color] G2
On/Off & raise/lower two pole	rPODBA 2P DX [color] G2

BLT fixtures with integrated rIO devices complement any small office space. Pair them with an rCMS occupancy sensor and the space now has wireless occupancy sensing and dimming capability. For additional configuration options please consult with Tech Support.

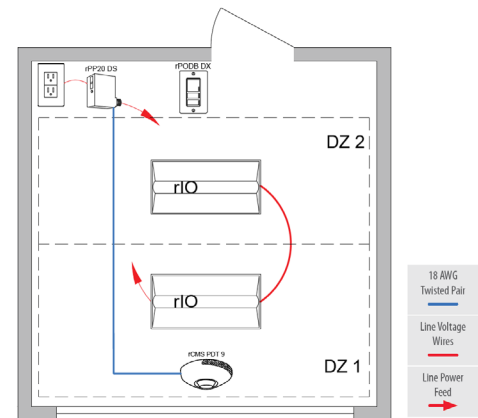

rCMS <sup>1</sup>		Example: RCMS PDT 10 AR G2					
Series / Detection	Power Supply <sup>1</sup>	Occupancy Detection	Lens (Required)	Operating Mode	Generation		
RCMS nLight AIR occupancy and daylight sensor	[blank] Power Supply ordered separately PS 150 Standard 150 mA Power Supply	[blank] PIR Detection PDT Dual Tech PIR/Microphonics	10 Large Motion/ Extended Range 360° 9 Small Motion/ Extended Range 360° 6 High Bay 360° Lens	[BLANK] None AR Auxiliary Relay	G2 Generation 2 compatibility		

#### Notes

1 RCMS requires low voltage power from either RPP20 DS 24V G2 or PS150.



Sensor Switch  
WSX




nLight WIRED  
NPOD UNITOUCH



nLight WIRED  
nPODMA DX



nLight AIR  
rPODBA



BLT with rIO



rPODBA




RCMS

# 2BLT Volumetric Recessed Lighting 2'x2'


## Constant Lumen Management

Enabled by the embedded nLight control, the BLT actively tracks its run-time and manages its light source such that constant lumen output is maintained over the system life. Referred to as lumen management, this feature eliminates the energy waste created by the traditional practice of over-lighting.

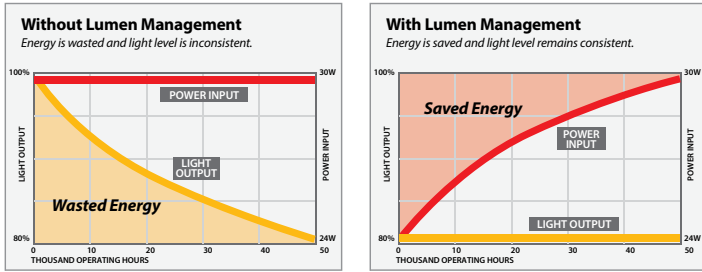


## PHOTOMETRICS

**2BLT2 33L ADP LP835**, 3332 delivered lumens, test no. ISF36900P19, tested in accordance to IESNA LM-79

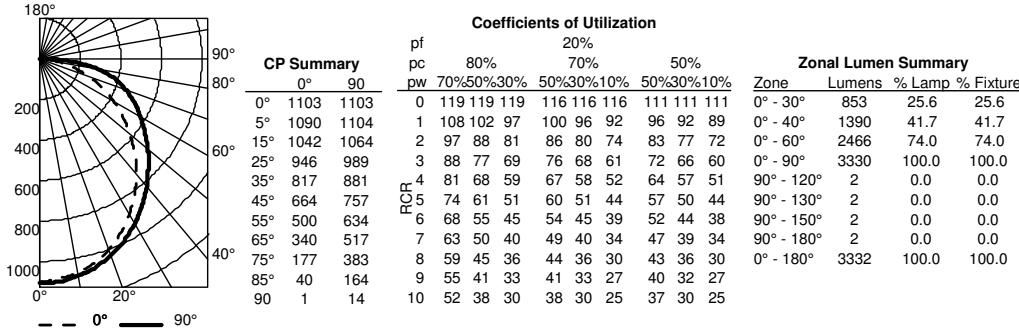

**2BLT2 40L ADP LP835**, 4041 delivered lumens, test no. ISF36900P35, tested in accordance to IESNA LM-79

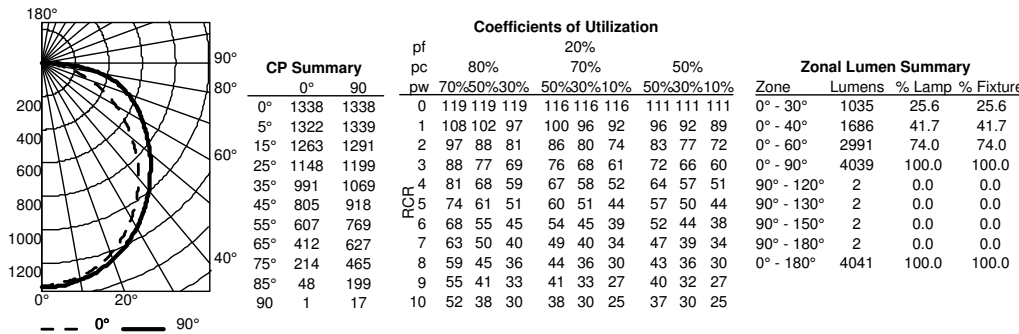

# 2BLT Volumetric Recessed Lighting 2'x2'

## Performance Data

Model Number	Lumens	LPW	Watts	DLC Listing	DLC ID
2BLT2 20L ADP E21 (GZ1, GZ10) LP840 [All Options]	2065.45	124.06	16.64	Premium	PM92196A
2BLT2 20L ADP E21 (GZ10) LP835 [All Options]	2033	126.58	16.06	Premium	P6445UVD
2BLT2 20L ADP GZ1 LP835 [All Options]	2033	122.11	16.64	standard	PLNK6MX8
2BLT2 20L ADPT E21 (GZ10) LP840 [All Options]	2037.91	126.89	16.06	Premium	PYX15QEQ
2BLT2 20L ADPT GZ1 LP835 [All Options]	2005.89	120.49	16.64	standard	P40HQGLB
2BLT2 20L ADPT GZ1 LP840 [All Options]	2037.91	122.41	16.64	standard	PB3HB9AK
2BLT2 33L ADP E21 (GZ1, GZ10) LP835 [All Options]	3332	124.92	26.67	Premium	PHSXHE8F
2BLT2 33L ADP E21 (GZ1, GZ10) LP840 [All Options]	3385.19	126.91	26.67	Premium	PD18CKQ8
2BLT2 33L ADPT E21 (GZ1, GZ10) LP840 [All Options]	3340.05	125.22	26.67	Premium	PF98C2H
2BLT2 33L ADPT E21 (GZ10) LP835 [All Options]	3287.57	125.14	26.27	Premium	PTKZR9WQ
2BLT2 33L ADPT GZ1 LP835 [All Options]	3287.57	123.25	26.67	standard	PTN5023N
2BLT2 40L ADP E21 (GZ1, GZ10) LP835 [All Options]	4041	127.35	31.73	Premium	P1XWW9GV
2BLT2 40L ADP E21 (GZ1, GZ10) LP840 [All Options]	4105.51	129.38	31.73	Premium	PHCQ2CQF
2BLT2 40L ADPT E21 (GZ1, GZ10) LP835 [All Options]	3987.12	125.65	31.73	Premium	PW6RMMJ4
2BLT2 40L ADPT E21 (GZ1, GZ10) LP840 [All Options]	4050.77	127.65	31.73	Premium	P5YYDAA8
2BLT2 48L ADP E21 (GZ1, GZ10) LP835 [All Options]	4800	109.9	43.67	standard	PJRH1R1G
2BLT2 48L ADP E21 (GZ1, GZ10) LP840 [All Options]	4876.63	111.66	43.67	standard	P8G93YOK
2BLT2 48L ADPT E21 (GZ1, GZ10) LP835 [All Options]	4736	108.44	43.67	standard	PITU3V6X
2BLT2 48L ADPT E21 (GZ1, GZ10) LP840 [All Options]	4811.61	110.17	43.67	standard	P5X2XU76

DLC information is subject to change, for the most up-to-date information please refer to [www.dlc.org](http://www.dlc.org). Above listings do not cover 347v or SLD.

## HE Performance Data

Model Number	Lumens	LPW	Watts	DLC Listing	DLC ID
2BLT2 20LHE ADP E21 (GZ1, GZ10) LP835 [All Options]	1948	130.59	14.91	Premium	PUQCZNQI
2BLT2 20LHE ADP E21 (GZ1, GZ10) LP840 [All Options]	1979.1	132.67	14.91	Premium	PJCZRW21
2BLT2 20LHE ADPT E21 (GZ1, GZ10) LP840 [All Options]	1952.71	130.9	14.91	Premium	PLC4RF4L
2BLT2 33LHE ADP E21 (GZ1, GZ10) LP835 [All Options]	3392	137.3	24.7	Premium	PXXZN9PH
2BLT2 33LHE ADP E21 (GZ1, GZ10) LP840 [All Options]	3446.15	139.5	24.7	Premium	PKPJYRF
2BLT2 33LHE ADPT E21 (GZ1, GZ10) LP835 [All Options]	3346.77	135.47	24.7	Premium	PZC8BZSS
2BLT2 33LHE ADPT E21 (GZ1, GZ10) LP840 [All Options]	3400.2	137.64	24.7	Premium	PM5G8AFU
2BLT2 40LHE ADP E21 (GZ1, GZ10) LP835 [All Options]	4118	133.71	30.79	Premium	PJ55XFFP
2BLT2 40LHE ADP E21 (GZ1, GZ10) LP840 [All Options]	4183.74	135.85	30.79	Premium	PEGFHPZD
2BLT2 40LHE ADPT E21 (GZ1, GZ10) LP835 [All Options]	4063.09	131.93	30.79	Premium	P8E16E9B
2BLT2 40LHE ADPT E21 (GZ1, GZ10) LP840 [All Options]	4127.96	134.04	30.79	Premium	PFRSSSVG
2BLT2 48LHE ADP E21 (GZ1, GZ10) LP835 [All Options]	4845	128	37.85	Premium	P558XUZP
2BLT2 48LHE ADP E21 (GZ1, GZ10) LP840 [All Options]	4922.35	130.04	37.85	Premium	P1863H56
2BLT2 48LHE ADPT E21 (GZ1, GZ10) LP835 [All Options]	4780.4	126.29	37.85	Premium	PHPTG5M8
2BLT2 48LHE ADPT E21 (GZ1, GZ10) LP840 [All Options]	4856.71	128.31	37.85	Premium	PBKN954Z

DLC information is subject to change, for the most up-to-date information please refer to [www.dlc.org](http://www.dlc.org). Above listings do not cover 347v or SLD.

### How to Estimate Delivered Lumens in Emergency Mode

Use the formula below to estimate the delivered lumens in emergency mode

$$\text{Delivered Lumens} = 1.25 \times P \times \text{LPW}$$

P = Output power of emergency driver. P = 10W for E10WLCP option.

LPW = Lumen per watt rating of the luminaire. This information is available on the ABL luminaire spec sheet. LPW = Lumen per watt rating of the luminaire. LPW information available in Performance Data section.