




Submitted Model No.:______Specific Features:_____



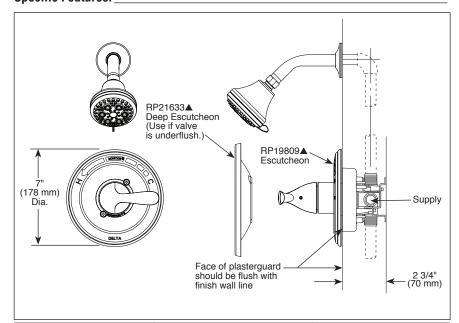

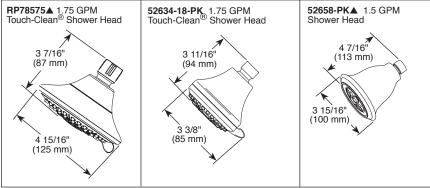





see what Delta can do

TUB AND SHOWER FAUCET TRIM

- Classic Bath Collection
- Valve Only (T13020 Series)
- Tub Only (T13120 Series)
- Shower Only (T13220 Series)

FEATURES:

- 13 Series pressure balanced bath mixing valve trim
- "-H2O" models include H₂Okinetic® Technology shower head

STANDARD SPECIFICATIONS:

- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system.
- For use with MultiChoice[®] Universal rough valve body. (R10000 Series)
- Back-to-back installation capability
- Solid brass forged body
- Temperature only controlled with metal lever handle
- Field adjustable to limit handle rotation into hot water zone
- 120° maximum handle rotation
- All parts replaceable from the front of the valve
- T13220-H2OT uses 52658-PK
- DPE = 1" deeper escutcheon (RP21633)
- Stem extension kit RP77991 can be ordered to allow for an additional 1 3/4" wall thickness. RP77991 ships with chrome escutcheon screws. For special finishes also order RP12630 escutcheon screws in desired finish.
- Shower head max flow rate 1.5 gpm @ 80 psi,
 5.7 L/min @ 550 kPa (T13220-H₂OT)
- Shower head max flow rate 1.75 gpm @ 80 psi,
 6.6 L/min @ 550 kPa (T13020, T13020-DPE, T13220, T13220-SHC)
- Note: Product will be marked with flow rate of specific shower head

WARRANTY

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5
 years from the date of purchase; or for commercial
 purchasers, 1 year from the date of purchase. No
 warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASSE 1016

Indicates compliance to ICC/ANSI A117.1 - Valve control only

■ EPA WaterSense®

Delta Faucet Company