


ASSEMBLY INSTRUCTIONS FOR #140914

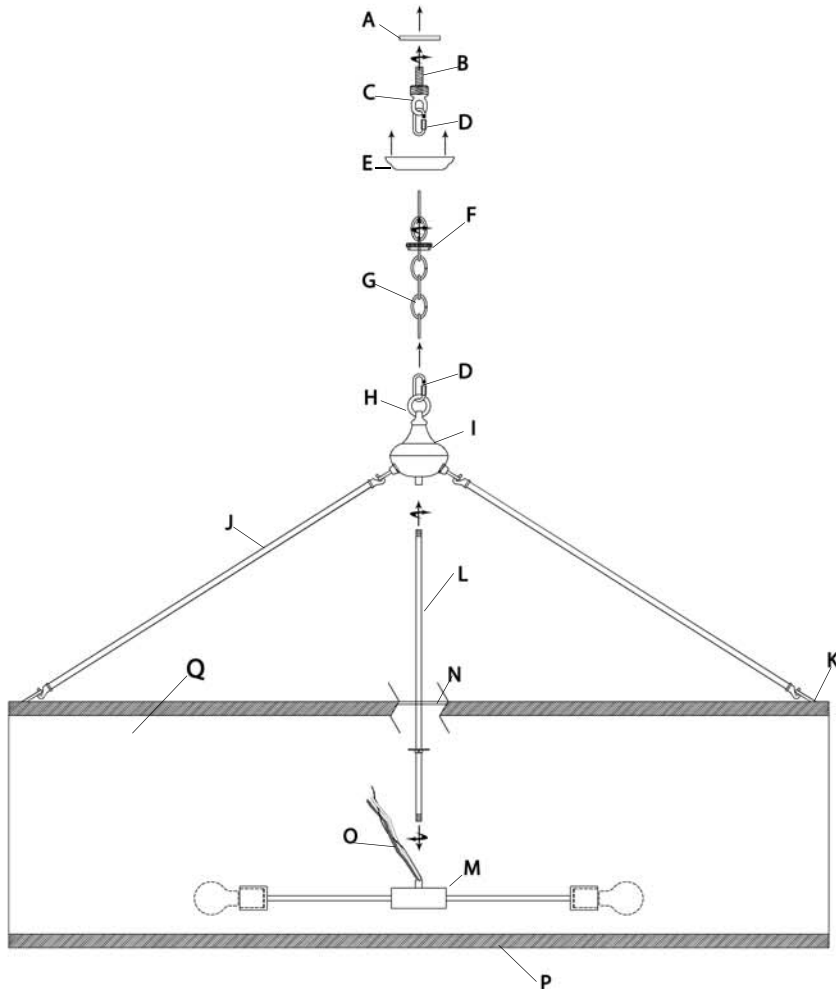

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

- 1.) Attach cross bar (A) to a secure location using customer provided screws.
- 2.) Screw cross bar nipple (B), with support loop (C) attached, onto cross bar (A).
- 3.) Attach fixture chain (G) onto hub loop (H) using quick link (D), provided.
- 4.) Place canopy nut (F) and Canopy (E) onto fixture chain (G) and attach fixture chain (G) to support loop (C) using quick link (D).
- 5.) Attach shade (Q) to hub (I) by securing the hooks on fixture arms (J) to both the loops on hub (I) and the shade loops (K).
- 6.) Feed electrical wires (O) up from light cluster (M) all the way to cross bar (A).
- 7.) Insert down stem (L) through top diffuser (N).
- 8.) Screw down stem (L) onto light cluster (M), then screw down stem onto hub (I) as shown.
- 9.) Wire as per local electrical codes.
- 10.) Slide canopy (E) up fixture chain (G) and secure to support loop (C) with canopy nut (F).
- 11.) Install light bulbs.
- 12.) Attach the bottom diffusers (P), being careful not to scratch the inside of the shade (Q).



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com