
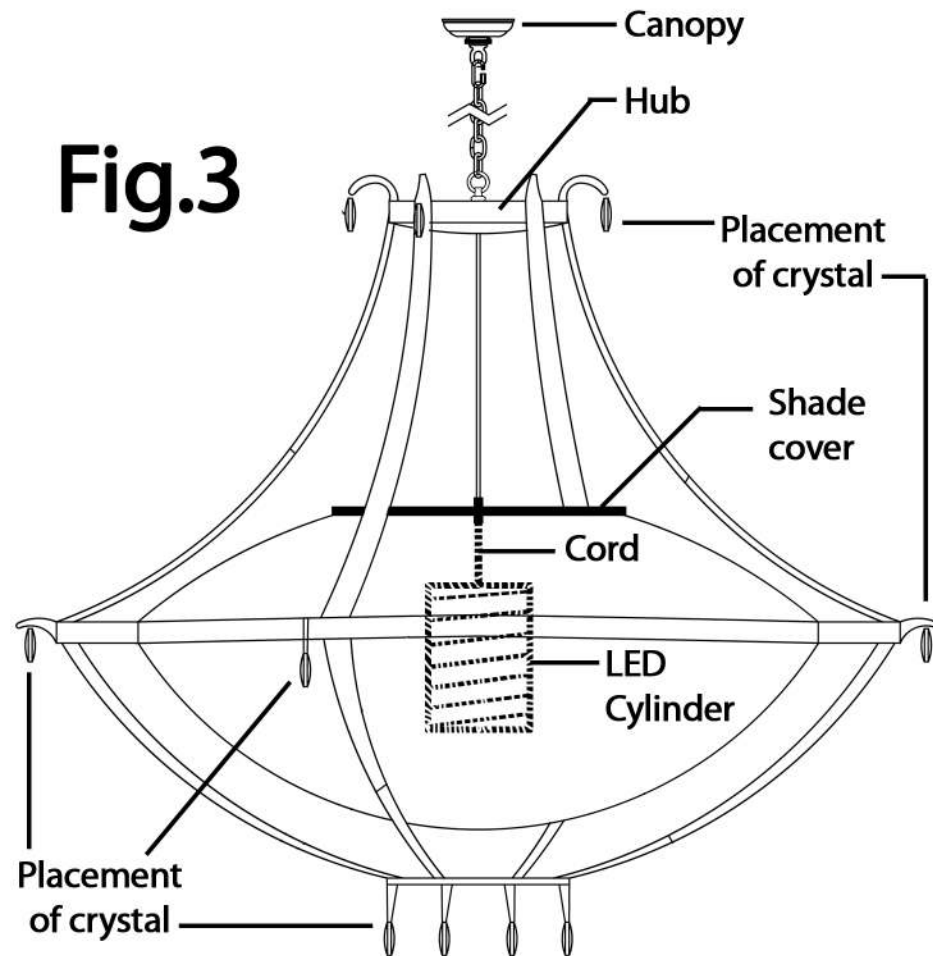
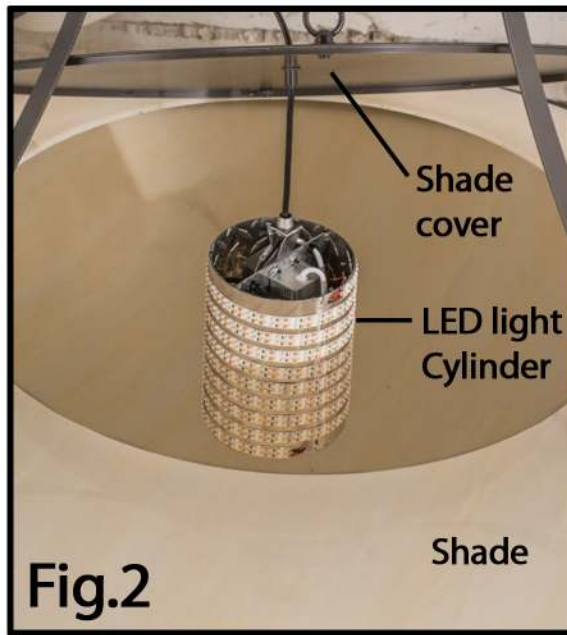


ASSEMBLY INSTRUCTIONS FOR # 161054

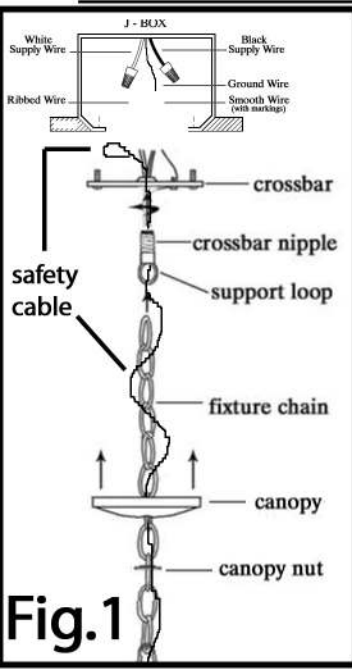

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

1-5 see Fig.1

1. Attach crossbar nipple with support loop to crossbar.
2. Attach crossbar ceiling not j-box.
3. Attach fixture chain to hub loop.
4. Place canopy nut then canopy on to fixture chain as shown.
5. Attach fixture chain to support loop.
6. Attach fixture to chain.
7. Place cover on top of the shade with light cylinder hanging into the shade. (Fig.2&3)
8. Run your wire through the hub, chain, and canopy. Run the safety cable through the chain and canopy as well. Attach safety cable to support in ceiling. Wire as per local codes. (Fig.1)
9. Slide canopy up to ceiling, screw canopy nut onto cross bar nipple and tighten to canopy.
10. Attach crystals to fixture. (Fig.3)
11. Power on. Enjoy your new fixture.
12. Have a Meyda Fine Day!!



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com