

**THIS FIXTURE WEIGHS OVER 150LBS.**

0700 06/14/16

**NEC:314.27B, A luminaire that weighs more than 23kg (50lbs.) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM WEIGHT to be supported.**



## ASSEMBLY INSTRUCTIONS FOR #177850

### IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR  
CIRCUIT BREAKER BOX BEFORE STARTING  
INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL  
PARTS BEFORE ASSEMBLY. BULBS ARE NOT  
INCLUDED

- 1.)The reducer(C), swivel(D), downrod(E), & coupling(F) can all stay together. Unscrew your light cluster at the reducer(C). Once light cluster is free, remove within fixture. Now unscrew the downrod(E)/coupling(F) from the nipple(K) that will be pointing up out of light cluster(J) hub cover(G). Slide your downrod(E) off of the wire(B) and set aside. Above the hub cover(G) you will have a knurled nut(H), remove this and the hub cover will slide off. Disconnect the wire that would lead to ceiling.
- 2.)Run the new wire down through the reducer(C), swivel(D), downrod(E), coupling unit that should still be together (in that order). Run it also through the knurled nut(H), hub cover(G), and nipple(K) (in that order).
- 3.)Connect the new wire to the existing light cluster wires (within light cluster hub) as per your local codes.
- 4.)Replace the hub cover(G), and screw the knurled nut(H) back down onto the nipple(K). Now screw the downrod unit back onto the nipple. Slide the cloth cover down the wire till it meets the top of the reducer(C). Send the other side (ceiling side) of wire through the roof(A) of fixture. Screw the light cluster back into the roof's center. Send wire up length of chain.
- 5.)Attach ceiling bracket(L) to ceiling, and connect chain(P) to canopy loop(O). Send wire through canopy(M) and connect to power source as per your local codes. Slide canopy up onto the ceiling bracket's bolts, and secure canopy flush to ceiling by screwing the canopy nuts(N) onto the ceiling bracket.
- 6.)Bulb your fixture (provided by others), power on, enjoy your new fixture!!

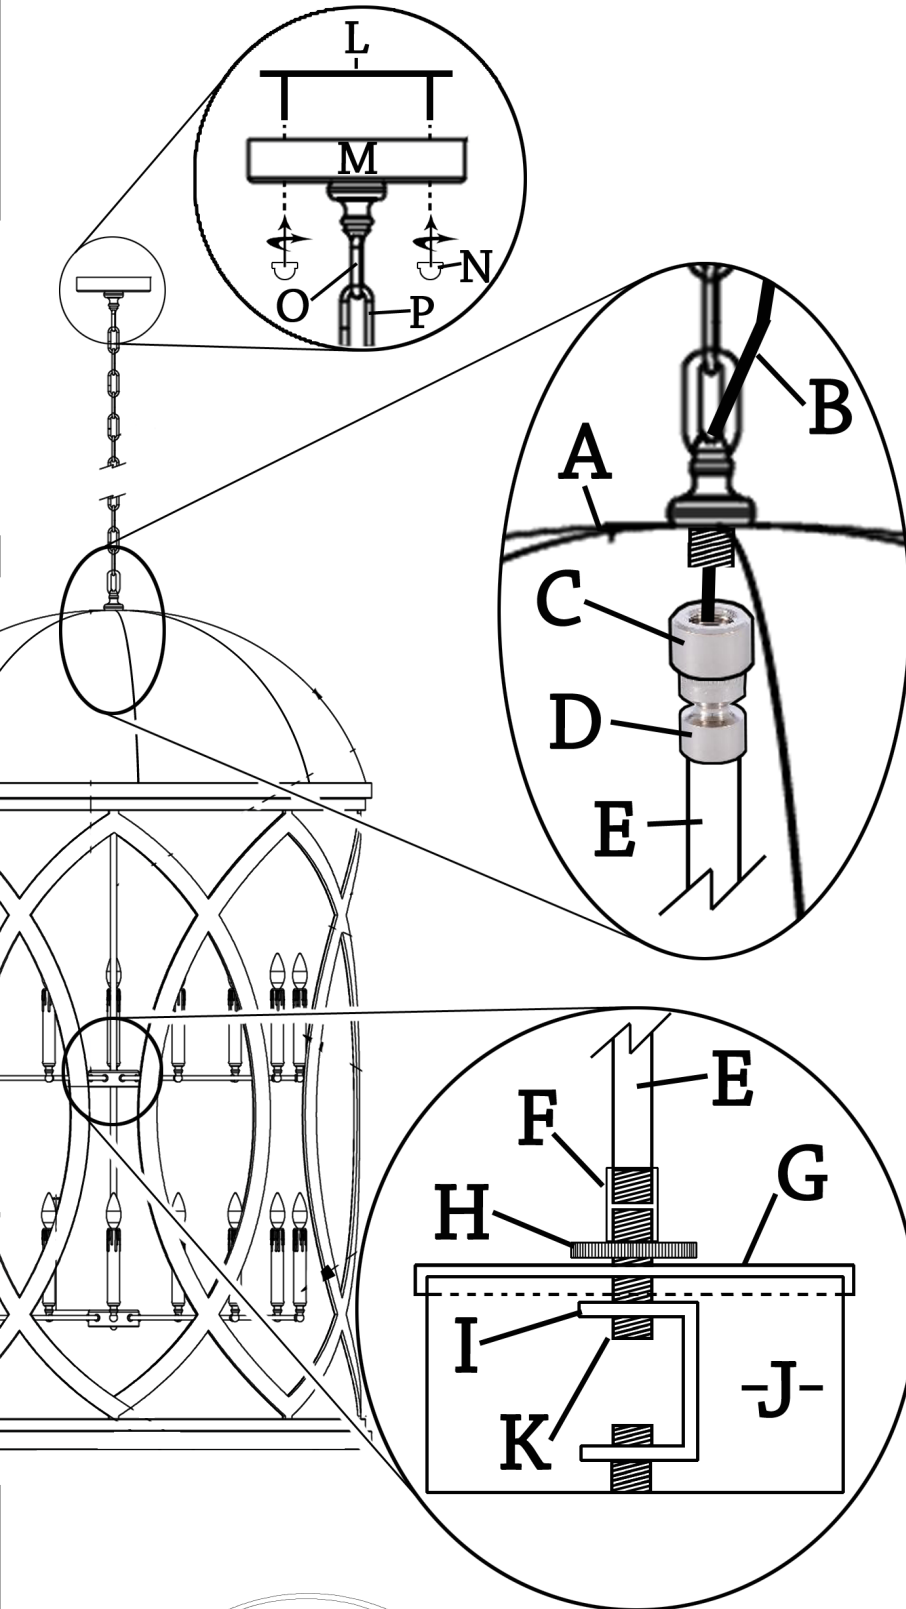

*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at [www.meyda.com](http://www.meyda.com)