


Submitted Model No.:

Specific Features:



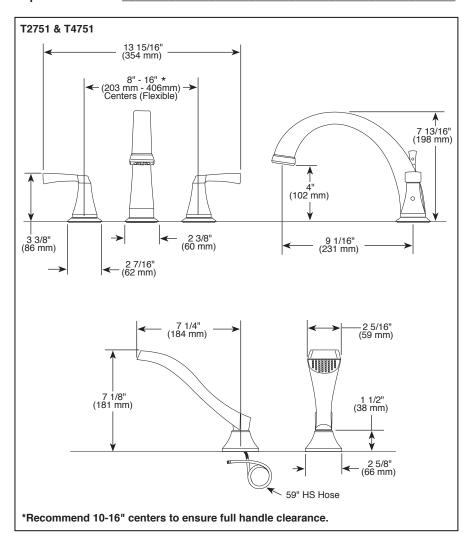

see what Delta can do

## ROMAN TUB/WHIRLPOOL FAUCET TRIM

- Dryden<sup>™</sup> Collection
- Three Hole Installation (T2751 Series)
- Four Hole Installation (T4751 Series)

## **STANDARD SPECIFICATIONS:**

- Handshower maximum flow rate 1.75 gpm @ 60 psi, 6.6 L/min @ 550 kPa
- Trim only for two handle Roman Tub faucet for concealed mounting
- Temperature and volume controlled with handles
- Rough-In kit must also be ordered to complete installation -R4707 for four hole
  - -R2700 or R2707 for three hole
  - -RP23601 for three hole 10" fixed installation
- There are separate specification sheets on each rough-in kit if more details are required
- Handshower includes double check valves for backflow prevention (T4751)

## **WARRANTY**

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



## **COMPLETE VALVE COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- Indicates ADA compliance to ICC/ANSI A117.1 Valve control only
- EPA WaterSense® Applies to handhsower only RP52589\*