


Submitted Model No.:

## Specific Features: \_

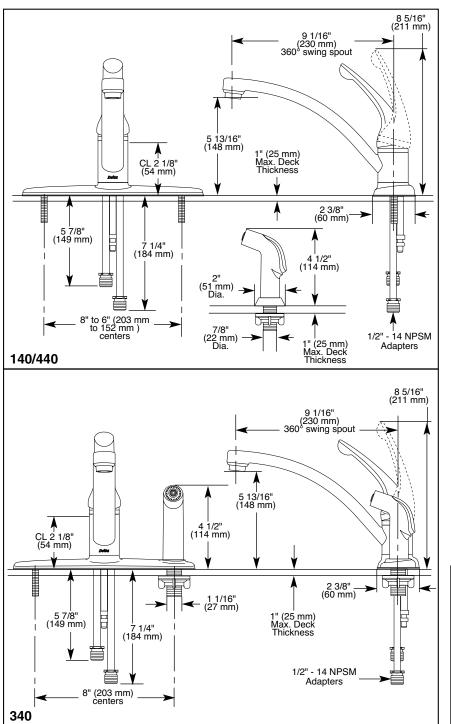

## DELTA. KITCHEN FAUCETS

- Single Handle
- Signature<sup>™</sup> Series
- Deck Mount
- 3 and 4 Hole Sink Applications
- Quick Snap<sup>®</sup> Vegetable Sprayer Hose Installation on Models 340 and 440 Series
- LISTED UL Listed to US and Canadian Safety Standards and Classified I In accordance withD ANSINSF 61I 21PL




## COMPLIES WITH:

- ASME A112.18.1
- CSA B125
- Indicates ADA compliance to CABO/ANSI A117.1
- IAPMO Listed
- CSA Certified
- City of L.A. approved (340, 440)

## STANDARD SPECIFICATIONS:

- Single handle kitchen deck faucets for exposed mounting on three and four hole sinks.
- Solid brass fabricated body.
- 9 1/16" (230 mm) long spout swings 360°.
- Lever handle shall return to neutral position when faucet is turned off.
- Red and blue button on handle.
- Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- 3/8" O.D. straight, staggered copper supply tubes - 5 7/8" (149 mm) and 7 1/4" (184 mm) long supplied with 1/2"-14 NPSM adapters.
- Models 140 and 440 series can be field converted from 8" (203 mm) to 6" (152 mm) centers. RP288 mounting bolts available separately.
- Models 340 and 440 series with spray attachment have anti-siphon device as integral part of valve body.
- Quick Snap<sup>®</sup> vegetable sprayer hose installation on models 340 and 440 series.



Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. 3.D.4

Standard Features	140-WF	140-SSWF	140-WHWF	340-WF	340-BSWF	340-SSWF	340-WHWF	440-WF	440-BSWF	440-CBWF	440-SSWF	440-WHWF
Washerless	•	٠	٠		٠	٠	٠	٠	٠	٠	٠	۲
8" (203 mm) Centers–field												
converts to 6" (152 mm) centers	•	•	٠						٠	•	•	•
8" (203 mm) Centers				٠	٠	٠						
Lever Handle	F	G	F.	F	F	F	P	F	F	Ŀ.	F	હે
Three Hole Installation	•	•	٠	•	٠	٠	•					
Four Hole Installation								٠	٠	٠	٠	٠
45" (1143 mm) Quick Connect												
Hose & Spray Assembly				•	•	•	•	٠	•	•	•	•
Sprayhead Matches Finish				•	•	•		٠	٠	•	•	•
3/8" O.D. Straight, Staggered Copper Supply Tubes–5 7/8" (149 mm) and 7 1/4" (184 mm) Long Supplied with 1/2"-14 NPSM												
Adapters to Accept 1/2" Iron Pipe	•	•	٠	•	•	•	•		٠	•	•	•
Biscuit Finish					٠				٠			
Chrome Finish	•							٠				
Chrome & <i>Brilliance</i> <sup>®</sup> Polished Brass Finish										•		
Brilliance® Stainless Finish		•				•					•	
White Finish			٠				•					٠



Indianapolis, Indiana 46280 A Division of Masco Corporation of Indiana © 2002 Masco Corporation of Indiana