

Lavatory Faucets

Single shank mixing faucet less coverplate-CER-TECK® 1/4 turn ceramic structures

SPECIFICATION:

- Two handle sink faucet
- Polished chrome plated finish
- Metal hold-down package
- Anti-rotation, body mounted locking pins
- Spout: R7 Gooseneck spout-9.0" radius-12.7" height(unmounted)-Standard rigid/swivel field installation unless LS Limited swing option selected-Vandal resistant.090" wall thickness
- Outlet#: 2 Vandal Res. Laminar Flow Outlet- 1.5 GPM (5.7 L/Min) flow rate at 60 psi- with Antimicrobial by Agion®
- Handle#: 7 63.5 mm (2.5") Balanced Lever Handles ADA compliant -Metal - Color Indexed - Vandal Resistant screws

OPERATION:

Not Available

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced July 17, 2013.



Complies to ASME A112.18.1/CSA B125.1

Verified to <0.25% Pb average wetted surface regulations

(Contact Delta Representative for State and/or Local Approvals)

Balanced Lever handles ADA Compliant and meets Handicapped

Accessibility Standard ICC/ANSI A117.1 of less than 5 lbs operating force.

Model No: 25C3927-R7

COMPLIES WITH:


CSA certified.

NOTES:

CA/VT Compliance:

This COMPLETE SERIES is ONLY available as CA/VT Compliant product as of Nov. 1, 2009.

The Product Numbers have NOT changed.

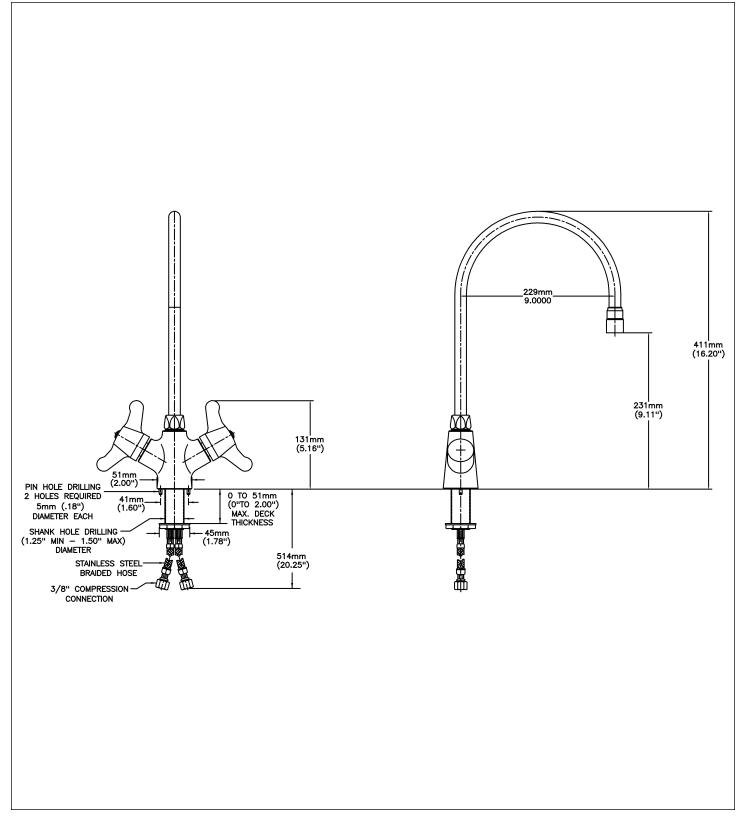

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced July 17, 2013.

