

Lavatory Faucets

Single shank mixing faucet less coverplate-CER-TECK® 1/4 turn ceramic structures

Model No: 25C3947-LS-R7 SPECIFICATION:

- Two handle sink faucet
- Polished chrome plated finish
- Metal hold-down package
- Anti-rotation, body mounted locking pins
- Spout: R7 Gooseneck spout-9.0" radius-12.7" height(unmounted)-Standard rigid/swivel field installation unless LS Limited swing option selected-Vandal resistant.090" wall thickness
- Outlet#: 4 Standard 1.5 GPM (5.7 L/Min) Flow Control Aerator
- Handle#: 7 63.5 mm (2.5") Balanced Lever Handles ADA compliant -
- Metal Color Indexed Vandal Resistant screws
- 120 degrees limited swing of spout (LS)

OPERATION:

Not Available

as of Nov. 1, 2009.

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced July 18, 2013.



COMPLIES WITH:

CSA certified.

Complies to ASME A112.18.1/CSA B125.1

Verified to <0.25% Pb average wetted surface regulations

(Contact Delta Representative for State and/or Local Approvals)

Balanced Lever handles ADA Compliant and meets Handicapped

Accessibility Standard ICC/ANSI A117.1 of less than 5 lbs operating force.


NOTES:

CA/VT Compliance:

This COMPLETE SERIES is ONLY available as CA/VT Compliant product

The Product Numbers have NOT changed.

Model No: 25C3947-LS-R7

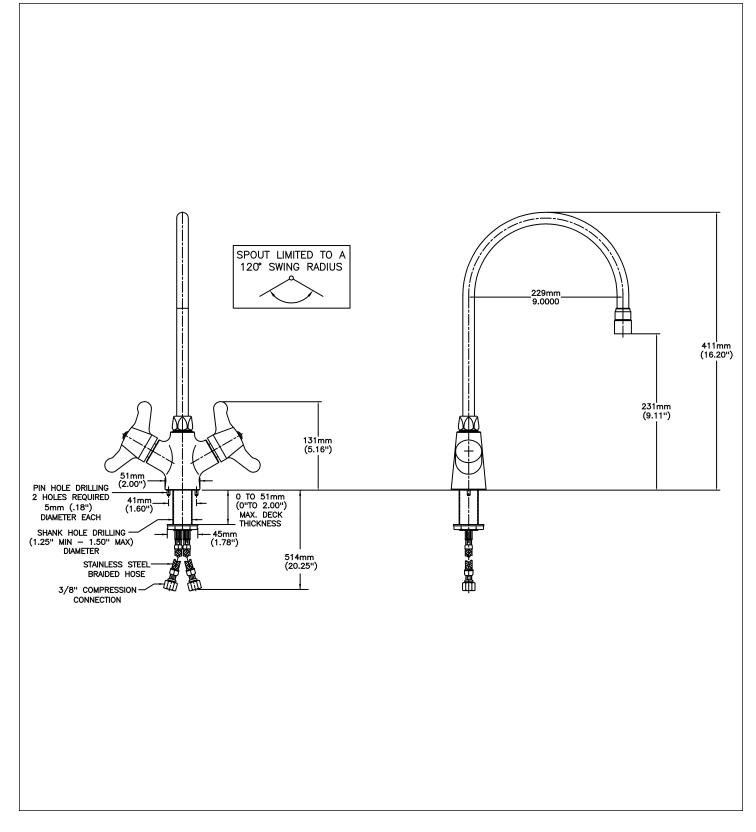

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced July 18, 2013.

