




**Submitted Model No.:** 

## Specific Features:

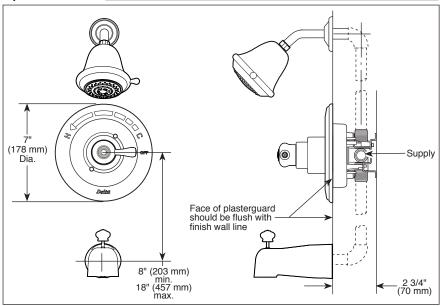







# TUB AND SHOWER FAUCET TRIM

■ Leland® Bath Series

## **FEATURES:**

- Monitor<sup>®</sup> 14 Series pressure balanced bath mixing valve
- Touch-Clean<sup>®</sup> Showerhead
- MultiChoice<sup>®</sup> Universal rough valve body (R10000 Series)

#### **STANDARD SPECIFICATIONS:**

- Maximum 2.0 gpm @ 80 psi, 7.6L/min @ 552 kPa
- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system
- Back-to-back installation capability
- Solid brass forged body
- Temperature only controlled with handle
- Field adjustable to limit handle rotation into hot water zone
- 120° maximum handle rotation
- All parts replaceable from the front of the valve
- LHP less handle program see recommended handles below
- Models with "CER" use ceramic cartridge RP74236
- Stem extension kit RP77991 can be ordered to allow for an additional 1 3/4" wall thickness RP77991 ships with chrome escutcheon screws For special finishes also order RP12630 escutcheon screws in desired finish
- Note: Product will be marked with flow rate of specific showerhead.


# WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



# **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- ASSE 1016
- EPA WaterSense®





#### ▲ Designate proper finish suffix