


**O**DELTA

### **BODY SPRAY**

■ 1/2" Rough-In

Submitted Model No.:

Specific Features:

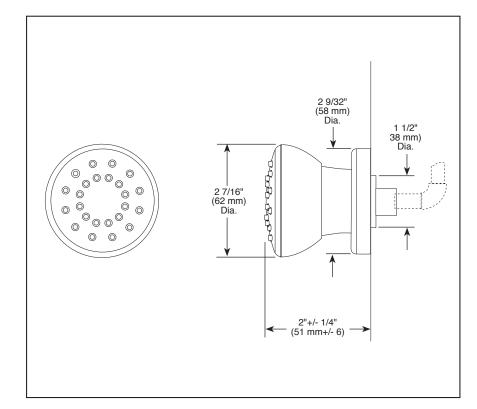

#### **STANDARD SPECIFICATIONS**

- 1/2" rough-in.\*
- 30° up and down adjustment.
- Maximum 2.00 qpm @ 80 psi, 7.6 L/min @ 550 kPa
- Solid brass construction.
- Matching finish spray face.
- Touch-clean® nubs.
- \*Note: This installation requires a 1/2" male threaded pipe fitting to extend 1/4" beyond the finished surface.


#### **WARRANTY**

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.


#### **COMPLIES WITH:**

ANSI/ASME A112.18.1 / CSA B125.1







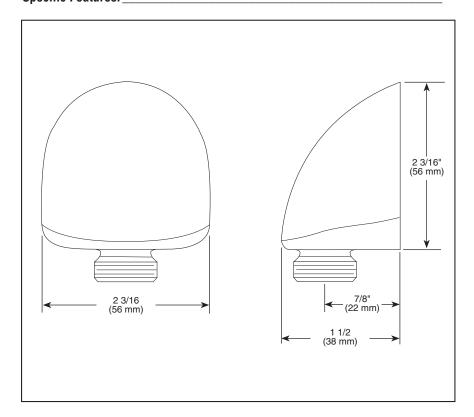

#### **STANDARD SPECIFICATIONS**

- Solid brass construction.
- 1/2" female NPT inlet.
- 1/2" male NPSM outlet for connecting to shower hoses.


#### **WARRANTY**

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**

■ ASME A112.18.1 / CSA B125.1



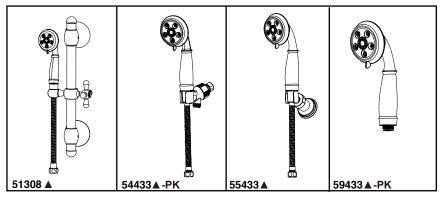

**Submitted Model No.:** 

**Specific Features:** 

#### 51308 ▲ 2.0 GPM 54433 ▲ -PK 2.0 GPM H₂Okinetic<sup>™</sup> H<sub>2</sub>Okinetic<sup>77</sup> Spray Spray Massage Massage 9 5/16" (237 mm) Spray 23 3/4" (603 mm) П П Trickle Trickle 291 3 15/16" (99 mm) (737 mm) 60" (1524 mm) (1524 mm) 55433 ▲ 2.0 GPM 59433 ▲ -PK 2.0 GPM H<sub>2</sub>Okinetic<sup>™</sup> H₂Okinetic<sup>™</sup> Spray Spray Massage Spray Massage Spray 9 5/16" (237 mm) ш 9 5/16" (237 mm) Trickle Trickle (104 mm) 60" (1524 mm)

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.comfor finish options and product availability.

**O**DELTA

### **HANDSHOWER**

- H2Okinetic Technology® Handshower
- 29" Wall Bar, Wall mount or Shower Arm Mount
- Certified Dual Check Valves

#### **STANDARD SPECIFICATIONS:**

- ABS hand held shower with three settings not a positive shut-off.
- Adjustable shower arm mount for hands-free showering.
- Wall bar with adjustable height handshower mount.
- 60"(1524mm) metal stretchable hose.
- Maximum water consumption 2.0 gpm & (7.6 L/min)
  80 psi.
- Actual water consumption 1.7gpm & (6.4 L/min)
  45 psi
- For use with automatic compensating valves rated at 1.5 gpm (5.7 L/min) or less.

#### **WARRANTY**

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from the date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries




#### **COMPLIES WITH:**

• ASME A112.18.1/CSA B125.1



55 E. 111th Street, Indianapolis, Indiana 46280 350 South Edgeware Road, St. Thomas, Ontario Canada N5P 4L1 © 2015 Masco Corporation of Indiana





■ Showering Components

# 4 1/2" (114 mm) 6 1/2 " (165 mm) 16" (406 mm)

#### STANDARD SPECIFICATIONS

- 16" long
- 1/2" IPS male threads


#### **WARRANTY**

- Lifetime Faucet and Finish Limited Warranty to the Original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all Industrial. Commercial and business applications.


▲ Designate proper finish suffix




Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See full-line price book or www.specselect.com for finish options and product availability.



**Submitted Model No.: Specific Features:** 

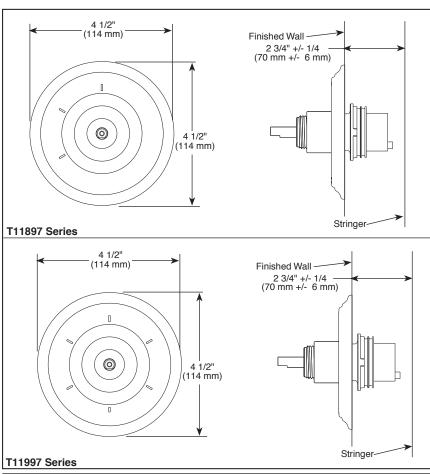

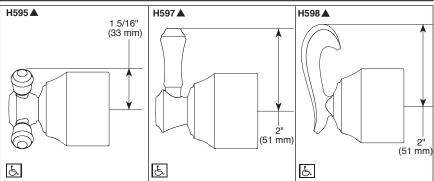

#### Available LHP Handle Options ▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-B-T11897-LHP Rev. B

# **DELTA**

# **CUSTOM SHOWER DIVERTER**

- Cassidy™ Series
  Three Function Diverter Trim (T11897 Series)
  Six Function Diverter Trim (T11997 Series)
- Coordinates With All Delta Cassidy™ Styled Bath Suites

#### STANDARD SPECIFICATIONS

- Three function diverter. 2 individual positions, 1 shared position.
- For two individual functions, no shared functions, order additional RP71717.
- Six function diverter. 3 individual positions, 3 shared positions.
- For three individual functions, no shared functions, order additional RP71718.
- 1/2" rough-in.
- Must also order R11000 rough-in to complete installation.
- LHP Less Handle Program. See handle options below.

#### WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



#### COMPLIES WITH:


- ASME A112.18.1 / CSA B125.1
- ASSE 1016

Indicates compliance to ICC/ANSI A117.1







55 E. 111th Street, Indianapolis, Indiana 46280 350 South Edgeware Road, St. Thomas, Ontario Canada N5P 4L1 © 2013 Masco Corporation of Indiana





**Submitted Model No.:** 

Specific Features:

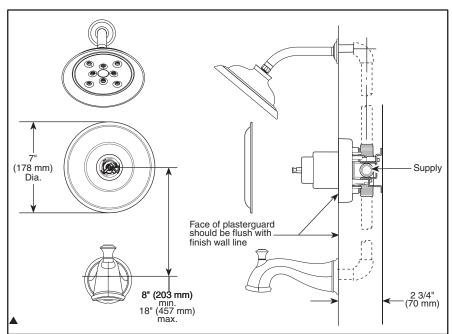





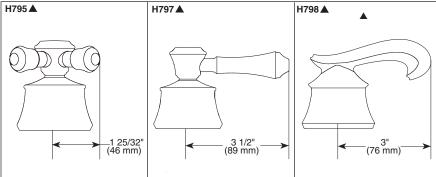

#### ▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.



# TUB AND SHOWER FAUCET TRIM

- Cassidy<sup>TM</sup> Series
- Valve Only (T14097 Series)
- Shower Only (T14297 Series)
- Tub/Shower (T14497 Series)

#### **FEATURES:**

- Monitor® 14 Series pressure balanced bath mixing valve with Scald-Guard®
- H<sub>2</sub>Okinetic Technology<sup>®</sup>

#### STANDARD SPECIFICATIONS:

- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system
- Must also order MultiChoice® universal rough separately
- Back-to-back installation capability
- Solid brass fabricated body
- Temperature only controlled with handle
- Field adjustable to limit handle rotation into hot water zone
- 120° maximum handle rotation
- For use with automatic compensating valves rated at 7.48 L/Min (1.92 gpm) or less
- All parts replaceable from the front of the valve
- LHP less handle program see recommended handle options below
- 2.0 gpm max @ 80 psi, 7.5 L/Min @ 552 kPa
- 1/2" CWT sweat and 1/2" IPS threaded spout adapter


#### **WARRANTY**

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.




#### **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- ASSE 1016
- EPA WaterSense®







55 E 111th Street, Indianapolis, Indiana 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2015 Masco Corporation of Indiana

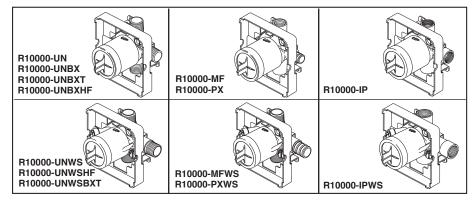

**Submitted Model No.:** 

Specific Features:

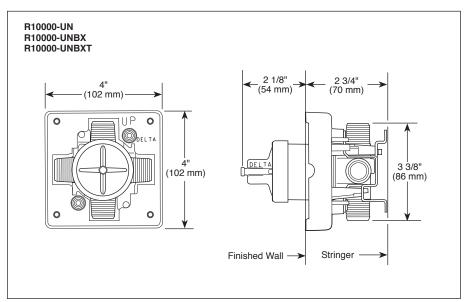

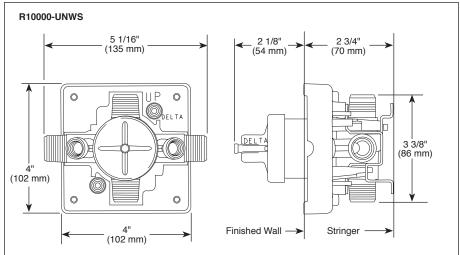



Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

# **O**DELTA

### MULTICHOICE® UNIVERSAL ROUGH VALVE BODY

- R10000-UN (Universal Inlets/Outlets)
- R10000-UNBX (Universal Single Box Model)
- R10000-UNBXHF (High Flow Shower Only)
- R10000-UNBXT (Thin Wall)
- R10000-UNWS (Universal with Stops)
- R10000-UNWSHF (High Flow with Stops)
- R10000-UNWSBXT (Thin Wall with Stops)
- R10000-PX (Pex Crimp Connections with UN Outlets)
- R10000-PXWS (Pex Crimp Connections with Stop with UN Outlets)
- R10000-IP (IPS Inlets/Outlets)
- R10000-IPWS (IPS with Stops)
- R10000-MF (Pex Cold Expansion Connections with UN Outlets)
- R10000-MFWS (Pex Cold Expansion with Stops with UN Outlets)

#### **STANDARD SPECIFICATIONS:**

- Forged brass body.
- Back-to-Back installation capabilities.
- Can be tested with air (200 PSI) or water (300 PSI) without valve using supplied test cap.
- Square plasterguard allows for right angle cuts.
- Thin wall mounting.
- For use with MultiChoice<sup>®</sup> Universal single or dual function trim. Cartridge ships with trim.
- 1/2" outlets and connections.

Note: No tub outlet in HF model.

Note: Should use proper fitting with each type (copper tubing, iron pipe, and pex fitting).

Note: Should use proper tooling with crimping pex fitting and cold expansion pex models.

Note: IP indicates female 1/2" threaded connections.

Note: UN indicates Universal type fitting and is 1/2" NPT male thread with 1/2" C.W.T. female sweat.

#### WARRANTY


- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

#### **COMPLIES WITH:**


ASME A112.18.1 / CSA B125.1



55 E. 111th Street, Indianapolis, Indiana 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2015 Masco Corporation of Indiana



Submitted Model No	). <b>:</b>
Specific Features:	

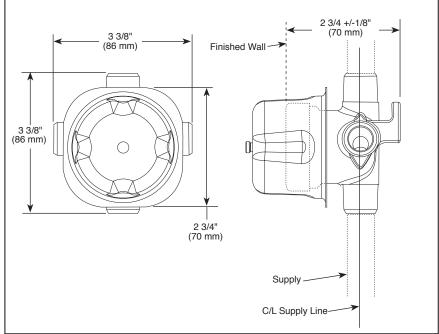





# ROUGH VALVE BODY

- R11000 (Case Qty. 3)
- 1/2" Rough-In

#### **STANDARD SPECIFICATIONS**

- Three port diverter rough
- For use with (3) three or (6) six function diverter.
- Forged brass body
- Can be tested with air (200 psi) or water (300 psi) using supplied test cap
- Refer to the installation instructions for more details

#### **WARRANTY**

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

#### **COMPLIES WITH:**

• ASME A112.18.1 / CSA B125.1

