





HEADS-LOW VOLTAGE

GENERAL PRODUCT INFORMATION:




This product is ETL listed and suitable only for dry locations and approved for use at any height above the finished floor.

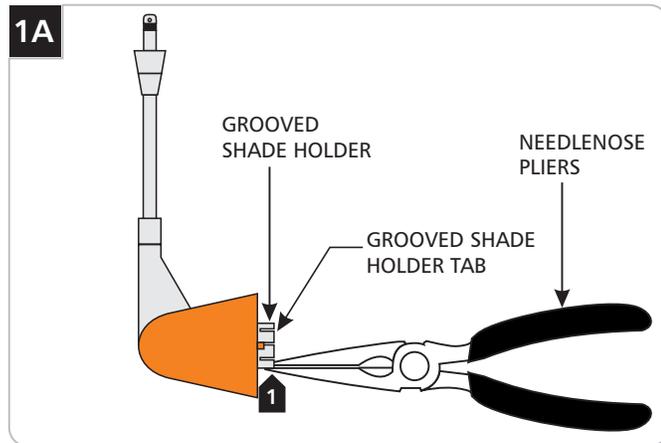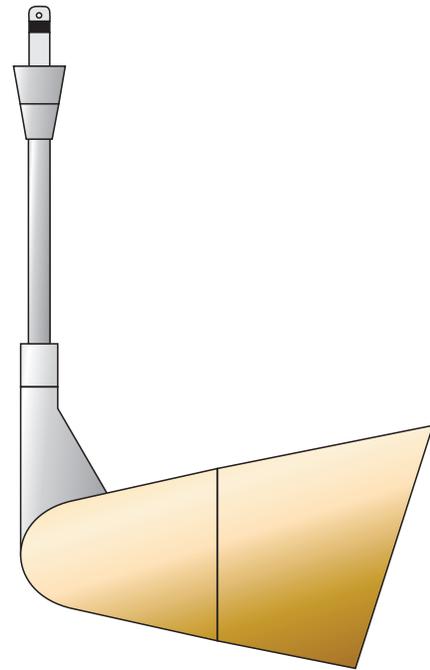


- 1** If applicable accessory fits tight or loose onto the Scania fixture, then carefully bend the grooved shade holder tabs in or out slightly with needle-nose pliers.

**NOTE:** Bend the grooved shade holder tabs carefully. Excessive bending may break the tabs.


**CAUTION:** To reduce the risk of a burn or electric shock during relamping, disconnect the power to the fixture.

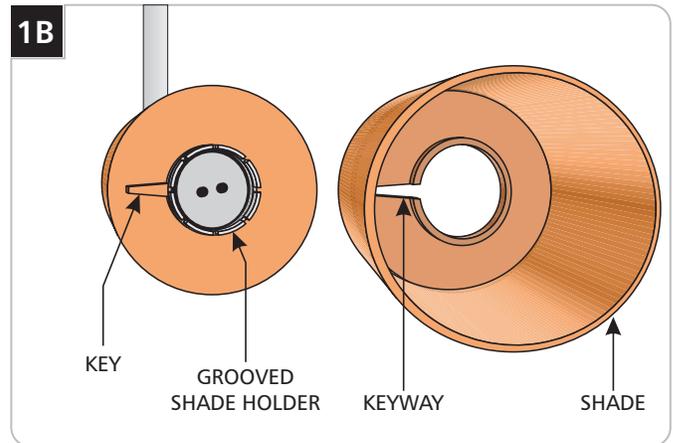

- 2** Line up the keyway in the shade with the key on the head.
- 3** Push the shade onto the grooved shade holder.

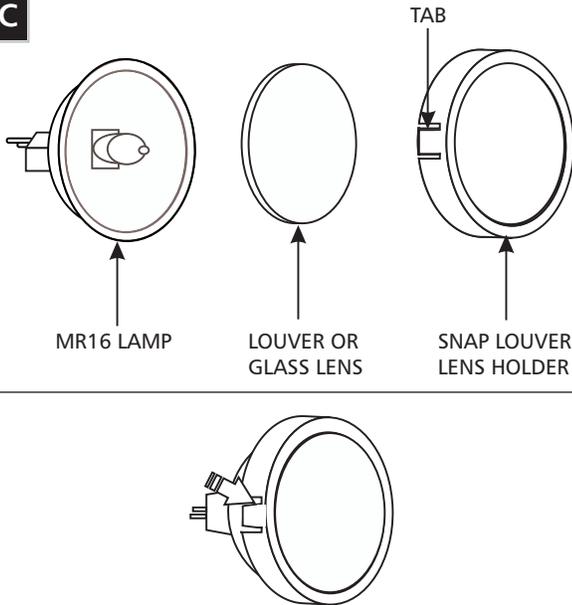**1C**

- 4 Place the louver or the glass lens (optional) into the Snap Louver Lens Holder.
- 5 Place the MR16 lamp into the Snap Louver Lens Holder.
- 6 Press the tabs on both sides of the Snap Louver Lens Holder against the MR16 lamp to keep it in the position.

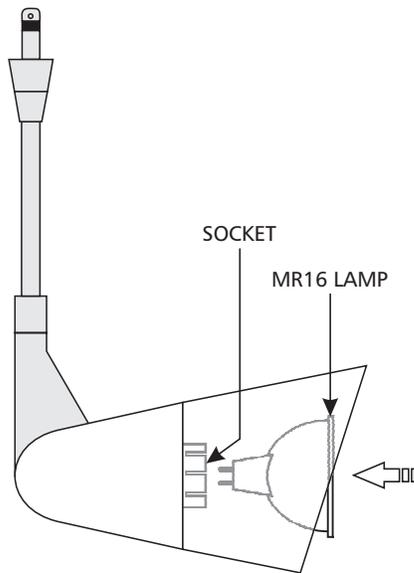**1D**

Use **MAX 50 Watt** type MR16 Front Cover Halogen Lamp.



- 7 Push the lamp pins into the socket holes.

## IMPORTANT SAFETY INSTRUCTIONS

*To reduce the risk of fire, electrical shock, exposure to excessive UV radiation, or injury to person:*

- Use this fixture indoors only.
- Do not look directly at the lighted lamp.
- Do not remain in light if skin feels warm.
- Risk of fire: Use only the type of lamp and maximum wattage indicated in this instruction manual.
- Never cover the halogen lamp with anything other than a Tech Lighting lamp shield and never place flammable material close to your fixture.
- Do not touch the fixture shades or lamp shield while the fixture is on. These surfaces may be HOT.
- To avoid glare in child's eyes, hang the fixture at least 18" above a table.

## Halogen Lamp General Information

- It is normal for a new halogen lamp to smoke slightly on first use. The protective coating is being vaporized.

## Prolonging Halogen Lamp Life

- Do not touch the lamp with bare hands. Any contaminant, even the oil from your hands can deteriorate the lamp. Handle the lamp with a soft, clean cloth. Rubbing alcohol can be used to remove any contaminant from the lamp.
- Do not run the lamps at full power when you do not need to. However, if dimming the fixture for an extended period of time, occasionally bring the light up to full brightness for a few minutes to complete the halogen cycle.

**SAVE THESE INSTRUCTIONS!**



**TECH LIGHTING®**

7400 Linder Ave, Skokie, IL 60077  
847.410.4400

[www.techlighting.com](http://www.techlighting.com)

© 2008 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.  
A Generation Brands Company