



Donohue LED Ceiling Light
3 Color Temperature Selectable 3000K/4000K/5000K
ASSEMBLY/INSTALLATION INSTRUCTIONS

Item # 587501: Donohue LED Ceiling Light

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

WARNING: Risk of Fire. Min 90°C supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

DIMMING

This product is designed to be compatible with many ELV/Reverse Phase controls and compatible with most residential type dimmers available on the market:

The following is a partial list of known compatible dimmer controls

Lutron: CTCL-153P, MACL-153M, DVCL-153P, Leviton: 6674, IPL06

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.


ASSEMBLY AND INSTALLATION

Turn off the power at fuse or circuit breaker.

1. Shut off the power at the circuit breaker and remove existing fixture, including the mounting hardware.
2. Unscrew the diffuser counterclockwise.
3. The lamp can switch between three color temperatures (3000K-4000K-5000K), which can be adjusted to your preference with the switch in the canopy (Fig.2).
4. Attach two mounted screws into outlet box leaving enough of screw exposed to engage keyholes in the top of fixture.
5. Connect the fixture wires to supply wires as shown in Fig.1, making sure that all wire connectors are secured. If your outlet box has a green or bare copper ground wire, connect the fixture ground wire to it. After wires are connected, tuck them carefully inside the Outlet Box.
6. After wiring, push the fixture up over the screws on outlet box and turn it counterclockwise, so the screws slide along the slots which holds the fixture in place. Locking screws hold the back plate to the ceiling.
7. Screw the Diffuser to the fixture clock side by hand.

Turn on the power at fuse or circuit breaker

ASSEMBLY AND INSTALLATION (CONT.)

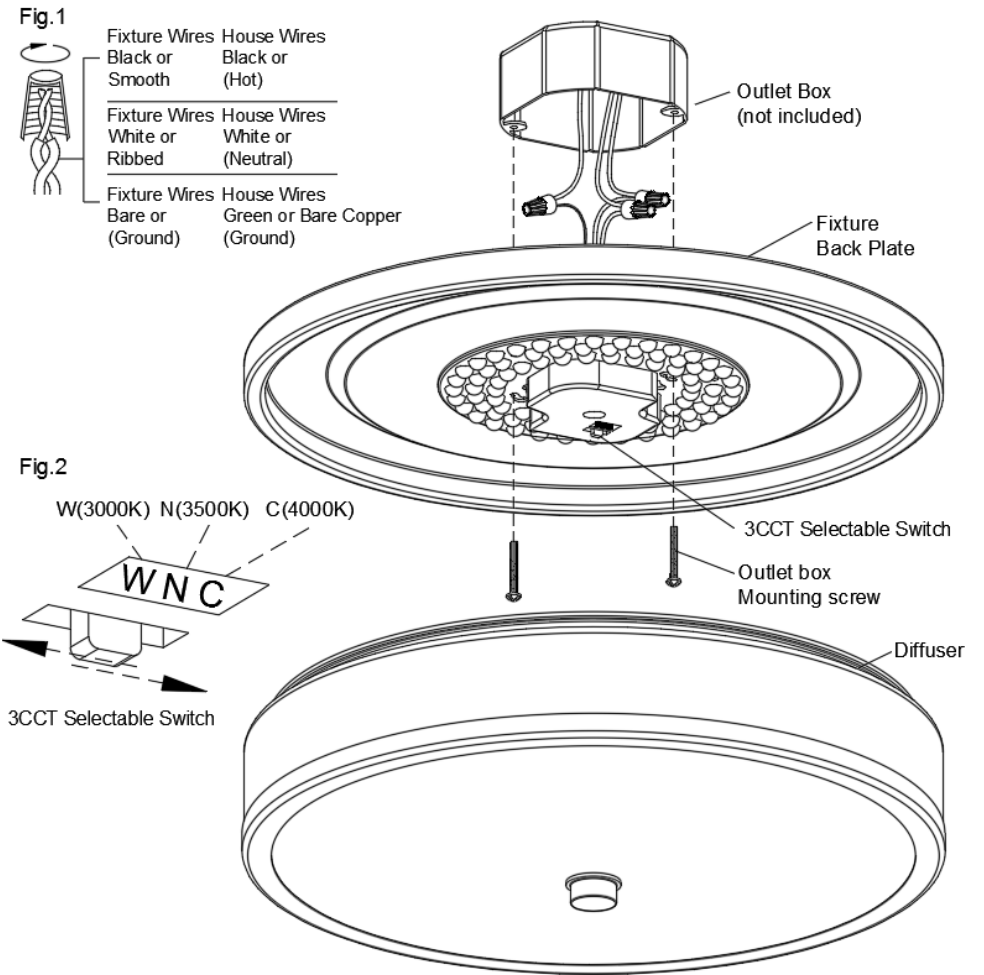

587501

**IF IN DOUBT ABOUT ELECTRICAL INSTALLATION,
CONSULT A LICENSED ELECTRICIAN.**

Customer Service 1-800-558-8700