

# INSTALLATION INSTRUCTIONS

Model# 72795-143-L / #72796-143-L  
 READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.  
 AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## PREPARING FOR INSTALLATION (Fig. 1)


1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Pull black, white, and ground wires out of base cup (D).
4. Place glass (F) in the middle of base cup (D), and thread into fixture frame (G). Secure base cup (D) with finials (E) until tight.

## CONNECTING THE WIRES (Fig. 2)

5. Connect electrical wires as shown in Fig. 2 making sure that all wire connectors (B) are secured. If your post (A) (Not included) has a ground wire (green or bare copper), connect fixture ground wire to it. If not, consult your electrician for proper grounding.
6. Tuck wire connectors carefully inside base cup (D).
7. Align base cup (D) with post (A) and secure with mounting screws (C). (Fig.1)
8. **LED information (#72795-143-L: 1 x AC LED 11W included. #72796-143-L: 1 x AC LED 8W included.) (DO NOT EXCEED THE MAXIMUM WATTAGE RATING) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
9. This fixture is ETL listed for wet location applications.

**Fig. 1**

LED Module (#72796-143-L: L-MD-C1402-8W)  
 (#72795-143-L: L-MD-C1402-11W)

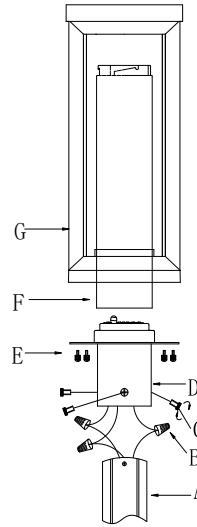

72795-143-L:  
 Glass Code# G72795  
 72796-143-L:  
 Glass Code# G72796

## Replacing LED module (Fig.3)


The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig.3).

- a. Shut off power. Loosen finials (E) and separate fixture frame (G) from base cup (D). Remove glass (F).
- b. Loosen screws (J) and washers (L) on the LED module (K), then carefully remove LED module (K).
- c. Reverse steps a-b for installing the new LED module.


**Note: The LED module should be provided by a specified supplier.**

Your installation is now complete. Return power to the outlet box and test the fixture.

**Fig.2**

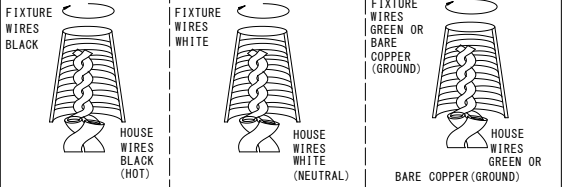

**Fig. 3**

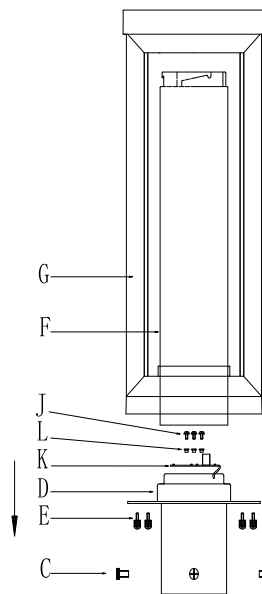

**“CAUTION-RISK OF FIRE CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR”**

**ATTENTION – RISQUE D’INCENDIE. CONSULTER UN ÉLECTRICIEN QUALIFIÉ POUR VOUS ASSURER QUE LES CONDUCTEURS DE LA DÉRIVATION SONT ADÉQUATS.**