

FLOOR DROP-IN HEATER

Designed for the fan-forced comfort where floor mounting is desired.

FEATURES

COMPACT DESIGN

**SUPERIOR FINNED TUBULAR
ELEMENT DESIGN**

**MANUAL AND AUTOMATIC
RESET THERMAL CUTOUT
PROVIDES ADDITIONAL
PROTECTION**

**SAFETY SCREEN KEEPS
FOREIGN OBJECTS OUT**

**QUICK RELEASE INTERIOR
FOR EASIER CLEANING**

APPLICATIONS

**HALLWAYS, ENTRYWAYS,
SOLARIUMS, &
STAIRCASE LANDINGS**



SPECIFICATIONS

VOLTAGE 120, 240/208 volts

WATTAGE Four sizes ranging from 375 to 1500W

COLOR Almond

AIR FLOW 80 cfm

FINISH Specially formulated polyester powder coating process is applied to the front panel which resists fading and abrasion.

CONSTRUCTION The housing is constructed of 18 gauge satin coat steel complete with knockouts to accommodate field wiring. The louvered grille is constructed of 14 gauge steel with 9 gauge trim.


HEATING ELEMENT A nickel chromium element is totally enclosed within a steel sheath and spiral steel fins are firmly staked to the surface to provide excellent heat transfer.

CONTROLS & WIRING An external thermostat control (not included) is required to operate this unit. The unit is factory wired for 240/208V @ 1500/1125W operation and can be field wired to 120V @ 375W, 750W, 1125W or 1500W; 208V @ 563W or 750W; 240V @ 1125W

WARRANTY One year warranty on complete unit.

CSA certified.  

DIMENSIONS

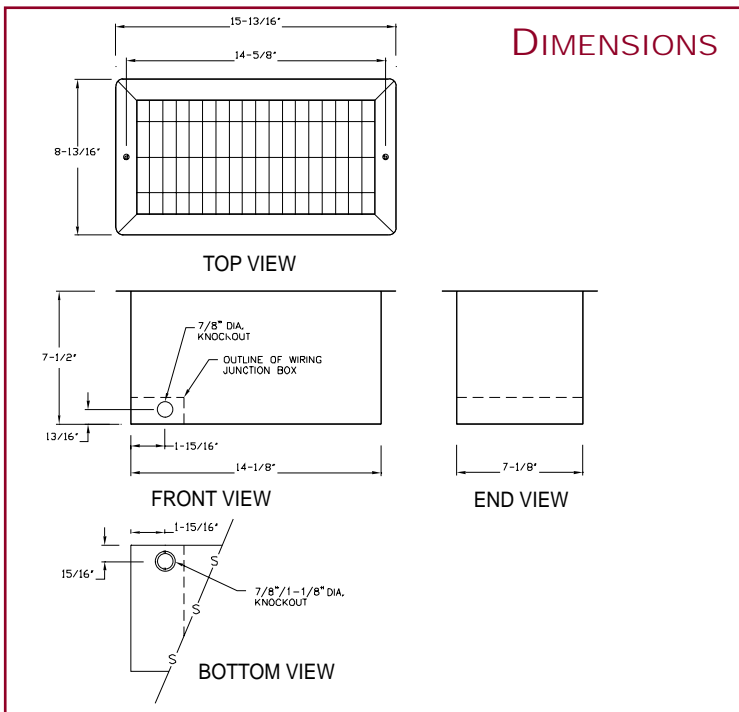

ORDERING GUIDE

CAT. No.	WATTS	BTU	VOLTS	WEIGHT (LBS)
FFIH15A31	375	1280	120	16
	750	2559	120	
	1125	3839	120	
	1500	5118	120	
	1500/1125	5118/3839	240/208	
	750/563	2559/1918	240/208	