

Residential & Commercial



LED Housings & Inserts & LED Ceiling Mounts

LED Recessed Inserts

LED Disk Lights

LED Flush Mount Fixtures

EL **ELCO Lighting**
The Best Choice in Lighting



LED Inserts and Ceiling Mounts

Introducing our modern and energy efficient line of LED Inserts and Ceiling Mounts Fixtures. All of our LED products are manufactured to the highest standard from the LED chip to the driver. Our line of LED Inserts and Ceiling Mount products are all 90+ CRI and have a life span of 50,000 hours L70. This product line has been engineered to dim smoothly and flicker-free with a wide range of dimmers.

Content

LED Housings & Inserts



3" Dedicated LED IC Housings	8
3" Round LED Inserts	9
3" Square LED Inserts	10
3" Adjustable LED Inserts	11



4" Dedicated LED IC Housings	12
4" Dedicated LED Shallow IC Housings	13
4" LED Insert & Interchangeable Trims	14
4" Round LED Inserts	15
4" Square LED Inserts	16
4" Adjustable LED Inserts	17
4" Round LED Bi-Pin Inserts	19



5" Dedicated LED IC Housings	20
5" Dedicated LED Shallow IC Housings	21
5" Round LED Inserts	22
5" Square LED Inserts	23
5" Adjustable LED Inserts	24



6" Dedicated LED IC Housings	26
6" Dedicated LED Shallow IC Housings	27
6" LED Insert & Interchangeable Trims	28
6" Round LED Inserts	29
6" Square LED Inserts	30
6" Adjustable LED Inserts	31



LED Disk Lights

4" LED Disk Lights	34
6" LED Disk Lights	35



LED Decorative Flush Mount Lights


LED Decorative Flush Mount Lights	38
-----------------------------------	----




Accessories

Accessories	40
-------------	----

Understanding **CRI** (Color Rendering Index)

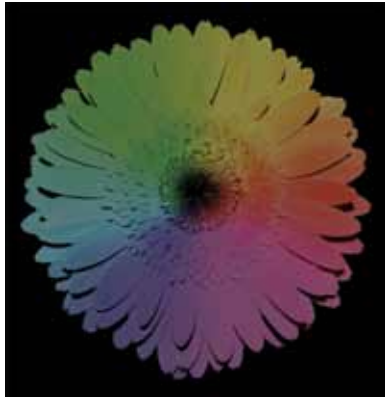

70 CRI

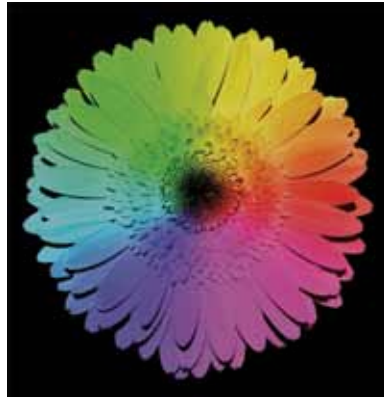

80 CRI



90+ CRI

Color Rendering Index (CRI)

Color rendering is the effect of a light source on the color appearance of an object by comparison to a reference light source. The color rendering index (CRI) is a quantitative measurement of the ability of a light source to reveal or render the colors of various colors realistically in comparison to an ideal or natural light source. The CRI scale is 1 to 100 with higher numbers

indicating more realistic rendering of targeted colors. Lower CRI numbers, below 70 CRI tend to render weak or distorted colors. The current standard in the market is in range of 80 CRI; however, most of our LED products have a CRI of 90+ making them perfect for rendering colors brilliantly and with great accuracy.

Color **Temperature**



2700K



3000K



3500K




4000K

Color Temperature


The Correlated Color temperature (CCT) rating of an LED lamp indicates the relative 'warmth' or 'coolness' of the appearance of white light generated by the lamp. Color temperature is expressed in degrees Kelvin (K). Generally speaking, color temperatures 3200K and below are considered to be 'warm' and therefore are a slightly more yellowish white, and color temperatures above 4000K are considered 'cool' and therefore are a slightly more bluish white. A light with a color between 2700K and 3000K are most appropriate for residential applications or as an incandescent or CFL replacement. A light

with a color temperature between 3200K to 3500K would be considered to be bright white and are appropriate in residential and light commercial applications such as boutique retail, classrooms and hospitality venues. A light with a color temperature 4000K and above are ideal for any commercial application including big box retail, electronics stores, industrial and technical manufacturing where superior visibility is essential to shopping, production and security.

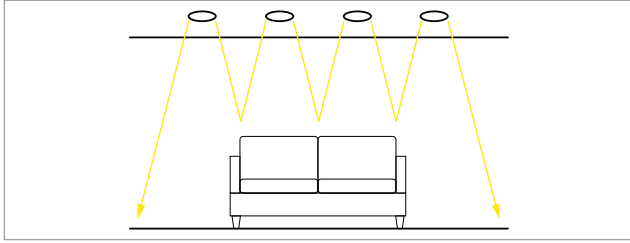


Ambient Lighting

Ambient lighting describes the main source of illumination in a room or space and it provides a wide area of general lighting. Sources of ambient lighting include windows, skylights and centrally located ceiling elements, such as chandeliers, fans and recessed fixtures.

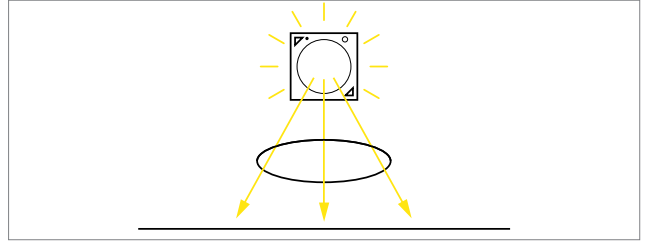


Luminous Flux

Luminous flux describes the unit flow of light. Lumens is the unit of measure that quantifies the flow of light from a lighting fixture or lamp. For example, if the light source claims 1000 lumens (Lm) it is the measure of the total light output of that device. The higher the lumen rating, the more light that is produced by the light source.

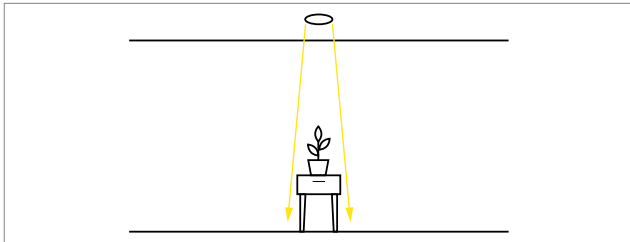


Accent Lighting

Accent lighting refers to a directional luminaire such as a track head that can be aimed to highlight an object or space. Track heads are very popular lighting for retail displays, hospitality venues such as night clubs, restaurants, and grocery store produce sections.

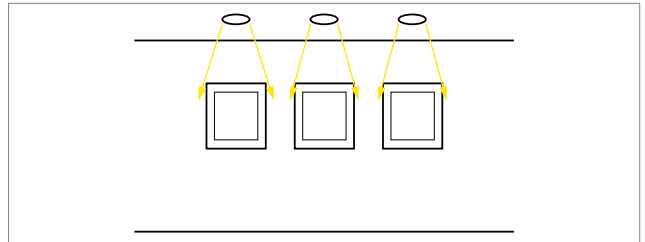


Wall Washing

Wall washing in lighting, describes the direct effect created by a light beam at an angle towards a wall or other structure to highlight that wall or an object that has been placed on or near the wall such as an art piece. Wall wash luminaires may be adjustable and can be used to graze a wall to highlight grain, texture or structure.

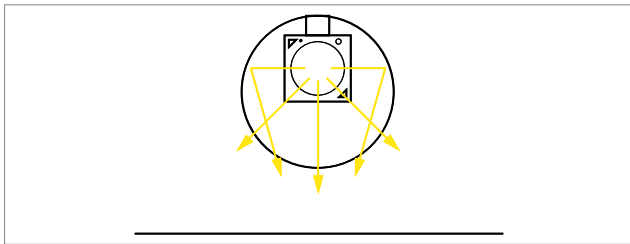

Efficacy

Efficacy is a metric used to compare light output (lumens) to energy consumption (watts). If a luminaire delivers 3000 lumens and consumes 30 watts then the efficacy would be 100 lumens per watt: $3000\text{Lm}/30\text{W} = 100\text{LPW}$. The current standard efficacy in the market ranges from 60LPW to 100LPW compared to that of a traditional incandescent light bulb, which is roughly 15LPW.

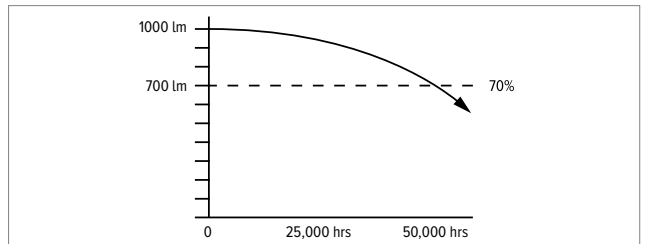

Lumen Depreciation

Lumen depreciation (or lumen maintenance) compares the amount of light produced initially from a light source to the amount of light output at a specified time in the future. If a new luminaire produced 1,000 lumens of light and now produces 700 lumens after 50,000 hours, then it has lumen maintenance of 70 at 50,000 hours.




LED Housings & Inserts

3" LED Housings and Inserts	8
4" LED Housings and Inserts	12
5" LED Housings and Inserts	20
6" LED Housings and Inserts	26

LED Housings and Inserts

Our Housings and Inserts are UL listed as IC Airtight for use in insulated ceilings with ELCO LED Inserts. They can be installed in residential wood structures or commercial building drop ceilings.

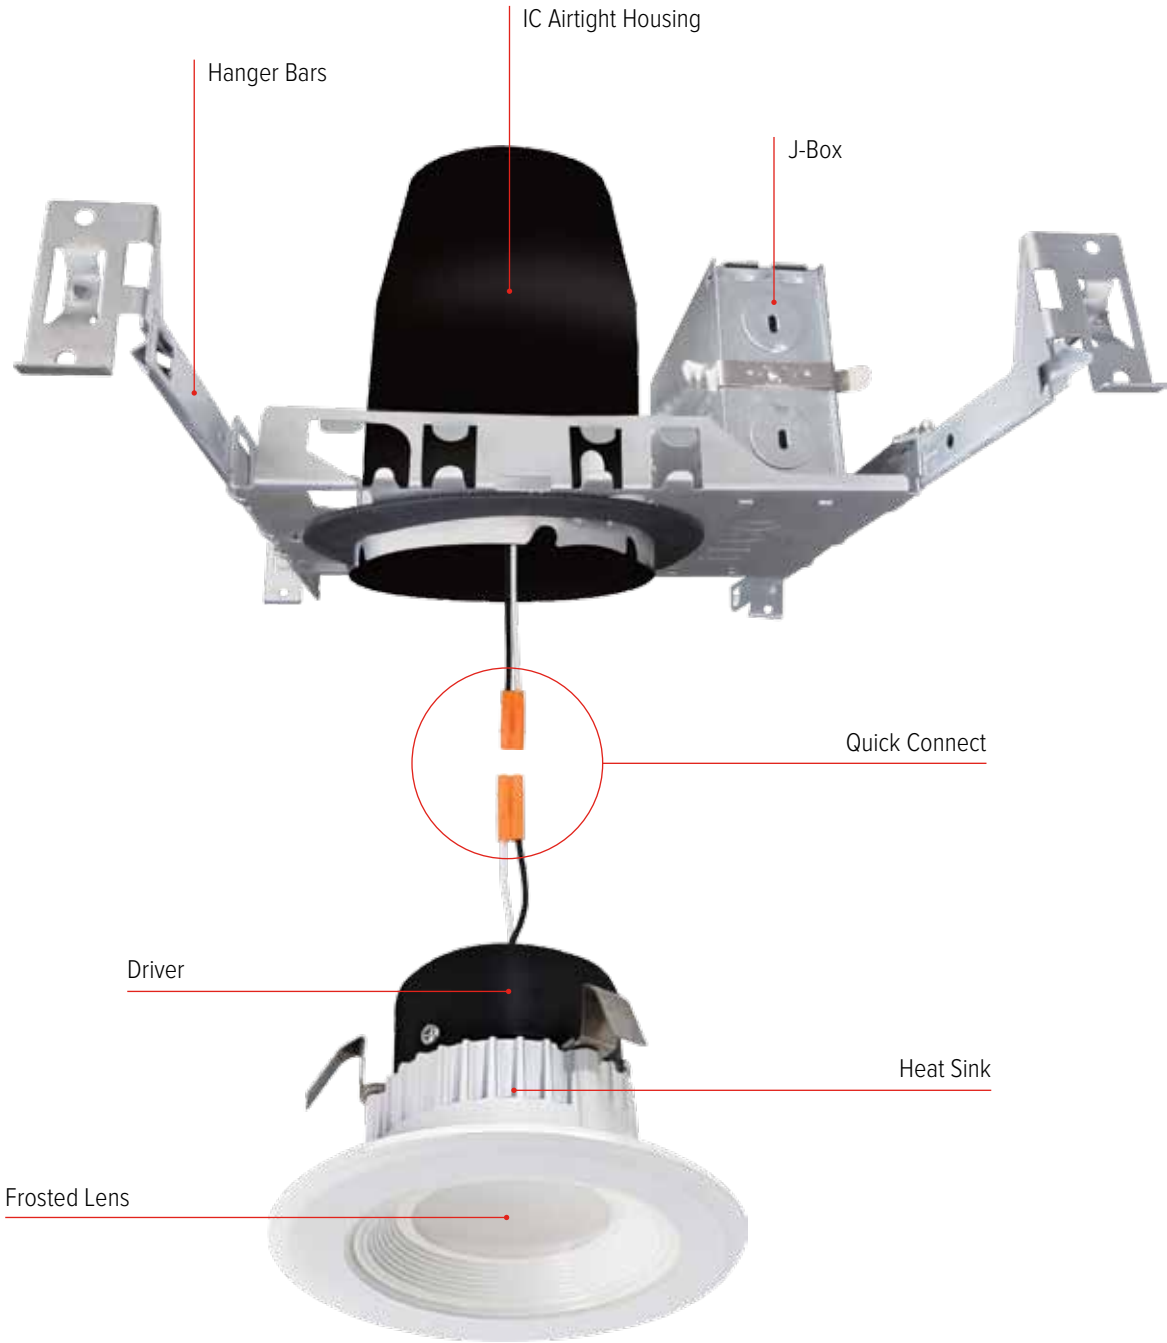

3" Dedicated LED IC Housings



EL390ICA



EL390ICA-7 (277V)

(Includes step-down transformer 277V–120V)

3" IC Airtight New Construction Housing

- Single wall IC Rated for use in insulated ceilings
- Housing with Quick Connect for easy insert installation
- Meets restricted air flow requirements (per ASTM E-283)
- Captive hanger bars span 24" can be repositioned at 90°
- Height allows for use in 2x6 construction
- Adjustable housings accommodates up to 1 1/4" ceiling thickness
- UL listed for damp location
- UL listed for wet location (with wet location inserts)
- UL listed for feed through
- UL listed for direct contact with insulation
- CA Title 24 compliant (as high efficacy luminaire)

Input Voltage	120V
Input Power	14W MAX.

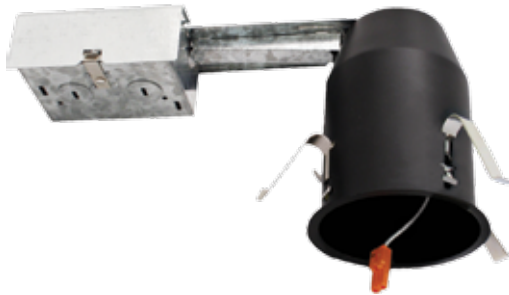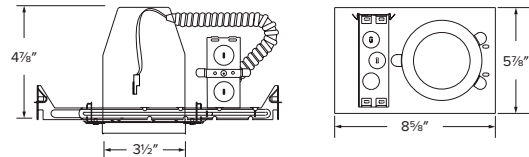


EL390RICA

3" IC Airtight Remodel Housing

- Single wall IC Rated for use in insulated ceilings
- Housing with Quick Connect for easy insert installation
- Meets restricted air flow requirements (per ASTM E-283)
- (4) Remodel clips secure housing
- Height allows for use in 2x6 construction
- Adjustable housings accommodates up to 1 1/4" ceiling thickness
- UL listed for damp location
- UL listed for wet location (with wet location inserts)
- UL listed for feed through
- UL listed for direct contact with insulation
- CA Title 24 compliant

Input Voltage	120V
Input Power	14W MAX.

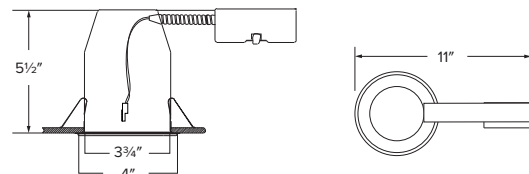

3" Round LED Inserts




White
EL31127W
 540 lm
 2700K
 9W

White
EL31130W
 580 lm
 3000K
 9W

LED Insert Baffle Trim

- Fits 3" dedicated 120V recessed housings
- Baffle reduces stray light
- Die-Cast construction provides lasting durability
- Soft white lens provides smooth lumen distribution
- Life Span of 50,000 hours L70
- Compatible with EL390ICA, EL390RICA

Input Power	9W
Lumens	540 - 580
Color Temp.	2700K - 3000K
CRI	90+
Input Volt	120V
Wet Location	UL listed
Dimmable	Triac/ELV



White
EL31227W
 540 lm
 2700K
 9W

White
EL31230W
 580 lm
 3000K
 9W




Bronze
EL31227BZ
 540 lm
 2700K
 9W

Bronze
EL31230BZ
 580 lm
 3000K
 9W

LED Insert Reflector Trim

- Fits 3" dedicated 120V recessed housings
- Die-Cast construction provides lasting durability
- Soft white lens provides smooth lumen distribution
- Life Span of 50,000 hours L70
- Compatible with EL390ICA, EL390RICA

Input Power	9W
Lumens	540 - 580
Color Temp.	2700K - 3000K
CRI	90+
Input Volt	120V
Wet Location	UL listed
Dimmable	Triac/ELV



3" Square LED Inserts



White
EL33130W
580 lm
3000K
9W




Bronze
EL33130BZ
580 lm
3000K
9W

LED Insert Baffle Trim

- Fits 3" dedicated 120V recessed housings
- Baffle reduces stray light
- Die-Cast construction provides lasting durability
- Soft white lens provides smooth lumen distribution
- Life Span of 50,000 hours L70
- Compatible with EL390ICA, EL390RICA

Input Power	9W
Lumens	580
Color Temp.	3000K
CRI	90+
Input Volt	120V
Wet Location	UL listed
Dimmable	Triac/ELV



White
EL33230W
580 lm
3000K
9W




Bronze
EL33230BZ
580 lm
3000K
9W

LED Insert Reflector Trim

- Fits 3" dedicated 120V recessed housings
- Die-Cast construction provides lasting durability
- Soft white lens provides smooth lumen distribution
- Life Span of 50,000 hours L70
- Compatible with EL390ICA, EL390RICA

Input Power	9W
Lumens	580
Color Temp.	3000K
CRI	90+
Input Volt	120V
Wet Location	UL listed
Dimmable	Triac/ELV



3" Adjustable LED Inserts



White
EL39727W
 840 lm
 2700K
 10.8W



Black
EL39727B
 840 lm
 2700K
 10.8W



Bronze
EL39727BZ
 840 lm
 2700K
 10.8W



Nickel
EL39727N
 840 lm
 2700K
 10.8W

EL39730W
 840 lm
 3000K
 10.8W

EL39730B
 840 lm
 3000K
 10.8W


EL39730BZ
 840 lm
 3000K
 10.8W

EL39730N
 840 lm
 3000K
 10.8W

LED Adjustable Pull-Down Insert

- For 3" dedicated 120V/277V recessed housings
- Provides maximum adjustability
- Interchangeable lenses available for multiple beam angles (sold separately)
- Functions as downlight, wall wash or accent light
- Adjustability of 356° Rotation, 65° Tilt
- Life Span of 50,000 hours
- Compatible with EL390ICA, EL390RICA

Input Power	10.8W
Lumens	840
Color Temp.	2700K - 3000K
CRI	90+
Input Volt	120V/277V
Damp Location	UL listed
Dimmable	Triac/ELV
Beam Angle	36°




Interchangeables Lens for LED Adjustable Pull-Down Insert



EP710C
 20° Beam

EP712C
 60° Beam

4" Dedicated LED IC Housings

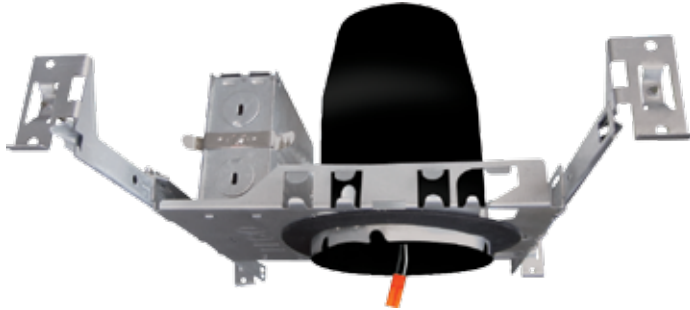

EL490ICA



EL490ICA-7 (277V)

(Includes step-down transformer 277V–120V)

4" IC Airtight New Construction Housing

- Single wall IC Rated for use in insulated ceilings
- Housing with Quick Connect for easy insert installation
- Meets restricted air flow requirements (per ASTM E-283)
- Captive hanger bars span 24" can be repositioned at 90°
- Height allows for use in 2x6 construction
- Adjustable housings accommodates up to 1 1/4" ceiling thickness
- UL listed for damp location
- UL listed for wet location (with wet location inserts)
- UL listed for feed through
- UL listed for direct contact with insulation
- CA Title 24 compliant (as high efficacy luminaire)
- EL490ICA-7 Includes step-down transformer 277V–120V

Input Voltage	120V
Input Power	14W MAX.

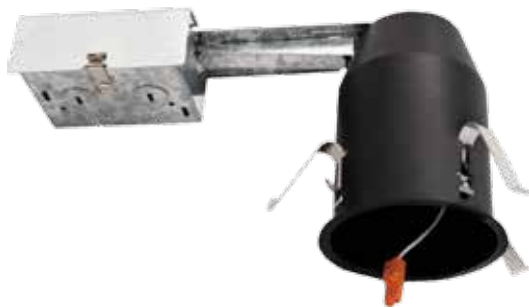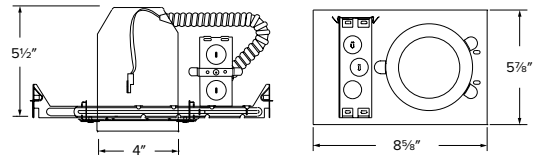


EL490ICA

4" IC Airtight Remodel Housing

- Single wall IC Rated for use in insulated ceilings
- Housing with Quick Connect for easy insert installation
- Meets restricted air flow requirements (per ASTM E-283)
- (4) Remodel clips secure housing
- Height allows for use in 2x6 construction
- Adjustable housings accommodates up to 1 1/4" ceiling thickness
- UL listed for damp location
- UL listed for wet location (with wet location inserts)
- UL listed for feed through
- UL listed for direct contact with insulation
- CA Title 24 compliant

Input Voltage	120V
Input Power	14W MAX.

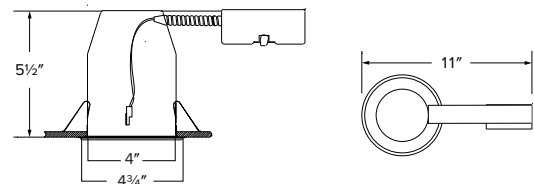

4" Dedicated LED Shallow IC Housings



EL492ICA


EL492ICA-7 (277V)

(Includes step-down transformer 277V–120V)

4" IC Airtight Shallow New Construction Housing

- Single wall IC Rated for use in insulated ceilings
- Housing with Quick Connect for easy insert installation
- Meets restricted air flow requirements (per ASTM E-283)
- Captive hanger bars span 24"
- Height allows for use in 2x4 construction
- Adjustable housings accommodates up to 1 1/4" ceiling thickness
- UL listed for damp location
- UL listed for wet location (with wet location inserts)
- UL listed for feed through
- UL listed for direct contact with insulation
- CA Title 24 compliant (as high efficacy luminaire)
- EL492ICA-7 Includes step-down transformer 277V–120V

Input Voltage	120V
Input Power	14W MAX.

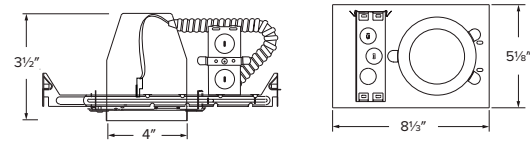


EL492RICA

4" IC Airtight Shallow Remodel Housing

- Single wall IC Rated for use in insulated ceilings
- Housing with Quick Connect for easy insert installation
- Meets restricted air flow requirements (per ASTM E-283)
- (4) Remodel clips secure housing
- Height allows for use in 2x4 construction
- Adjustable housings accommodates up to 1 1/4" ceiling thickness
- UL listed for damp location
- UL listed for wet location (with wet location inserts)
- UL listed for feed through
- UL listed for direct contact with insulation
- CA Title 24 compliant

Input Voltage	120V
Input Power	14W MAX.

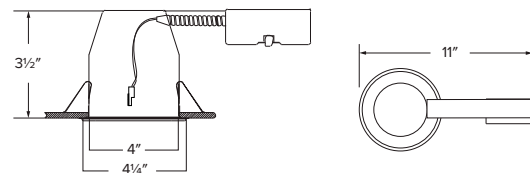

4" LED Insert & Interchangeable Trims




ELD4RT1227	ELD4RT1230	ELD4RT1240
800 lm	850 lm	900 lm
2700K	3000K	4000K
12.6W	12.6W	12.6W

LED Insert for Interchangeable Trims

- Insert Base includes LED, heat sink and driver
- Interchangeable trim ordered separately
- Medium base adapter included
- Life Span of 50,000 hours L70
- Compatible with EL490ICA, EL490RICA, EL492ICA, EL492RICA

Input Power	12.6W
Lumens	800 - 900
Color Temp.	2700K - 4000K
CRI	90+
Input Volt	120V
Damp Location	UL listed
Dimmable	Triac/ELV



Medium Base Adapter Included

Reflector Trims



All White
EL4330W



Black Reflector, White Ring
EL4330B



All Bronze
EL4330BZ



Clear Reflector, White Ring
EL4330C



All Copper
EL4330CP

Baffle Trims



All White
EL4331W



Black Baffle, White Ring
EL4331B



All Bronze
EL4331BZ



All Nickel
EL4331N



All Copper
EL4331CP

Square Baffle Trims



All White
EL4351W



Black Baffle, White Square
EL4351B



All Bronze
EL4351BZ



All Nickel
EL4351N

4" Round LED Inserts





EL41030W	EL41040W	EL41230W
750 lm	800 lm	800 lm
3000K	4000K	3000K
12W	12W	12W

LED Insert Baffle Trim

- Fits 4" dedicated 120V recessed housings
- Baffle reduces stray light
- Soft white lens provides smooth lumen distribution
- Medium base adapter included
- Life Span of 50,000 hours L70
- Compatible with EL490ICA, EL490RICA, EL492ICA, EL492RICA

Input Power	12W
Lumens	750 - 800
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	120V
Damp Location	UL listed
Dimmable	Triac/ELV



White	White	White
EL41527W	EL41530W	EL41535W
670 lm	690 lm	710 lm
2700K	3000K	3500K
10W	10W	10W



Bronze	Bronze
EL41527BZ	EL41530BZ
670 lm	690 lm
2700K	3000K
10W	10W


White	White
EL41540W	EL41550W
730 lm	750 lm
4000K	5000K
10W	10W

Bronze
EL41535BZ
710 lm
3500K
10W

LED Insert Reflector Trim

- Fits 4" dedicated 120V recessed housings
- Soft white lens provides smooth lumen distribution
- Medium base adapter included
- Life Span of 50,000 hours L70
- Compatible with EL490ICA, EL490RICA, EL492ICA, EL492RICA

Input Power	10W
Lumens	670 - 750
Color Temp.	2700K - 5000K
CRI	90+
Input Volt	120V
Damp Location	UL listed
Dimmable	Triac/ELV



4" Square LED Inserts



White
EL44130W
700 lm
3000K
10W




Bronze
EL44130BZ
700 lm
3000K
10W

LED Insert Square Baffle Trim

- Fits 4" dedicated 120V recessed housings
- Fully diecast design provides long lasting durability
- Soft white lens provides smooth lumen distribution
- Medium base adapter included
- Life Span of 50,000 hours L70
- Compatible with EL490ICA, EL490RICA, EL492ICA, EL492RICA

Input Power	10W
Lumens	700
Color Temp.	3000K
CRI	90+
Input Volt	120V
Wet Location	UL listed
Dimmable	Triac/ELV



Medium Base Adapter
Included



White
EL44230W
715 lm
3000K
10W




Bronze
EL44230BZ
715 lm
3000K
10W

LED Insert Square Reflector Trim

- Fits 4" dedicated 120V recessed housings
- Fully diecast design provides long lasting durability
- Soft white lens provides smooth lumen distribution
- Medium base adapter included
- Life Span of 50,000 hours L70
- Compatible with EL490ICA, EL490RICA, EL492ICA, EL492RICA

Input Power	10W
Lumens	715
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	120V
Wet Location	UL listed
Dimmable	Triac/ELV



Medium Base Adapter
Included

4" Adjustable LED Inserts



EL41330W

650 lm
3000K
9W



White
EL41430W

850 lm
3000K
13W




Black
EL41430B

850 lm
3000K
13W

LED Insert Adjustable Gimbal Trim

- Fits 4" dedicated 120V recessed housings
- Adjustable to function as a downlight or accent light
- Soft white lens provides smooth lumen distribution
- Medium base adapter included
- Adjustability of 25° Tilt
- Life Span of 50,000 hours L70
- Compatible with EL490ICA, EL490RICA, EL492ICA, EL492RICA

Input Power	9W
Lumens	650
Color Temp.	3000K
CRI	90+
Input Volt	120V
Wet Location	UL listed
Dimmable	Triac/ELV




Medium Base Adapter Included

LED Insert Adjustable Gimbal Trim

- Fits 4" dedicated 120V recessed housings
- Adjustable to function as a downlight or accent light
- Soft white lens provides smooth lumen distribution
- Medium base adapter included
- Adjustability of 25° Tilt, 358° Rotation
- Life Span of 50,000 hours L70
- Compatible with EL490ICA, EL490RICA

Input Power	13W
Lumens	850
Color Temp.	3000K
CRI	90+
Input Volt	120V
Damp Location	UL listed
Dimmable	Triac/ELV



Medium Base Adapter Included

4" Adjustable LED Inserts

Interchangeables Lens for LED Adjustable Pull-Down Insert



EP710C
20° Beam

EP712C
60° Beam



White
EL49727W

840 lm
2700K
12.6W

EL49730W

840 lm
3000K
12.6W

Black
EL49727B

840 lm
2700K
12.6W

EL49730B

840 lm
3000K
12.6W

Bronze
EL49727BZ

840 lm
2700K
12.6W

EL49730BZ

840 lm
3000K
12.6W

Nickel
EL49727N

840 lm
2700K
12.6W


EL49730N

840 lm
3000K
12.6W

LED Round Adjustable Pull-Down Insert

- For 4" dedicated 120V/277V recessed housings
- Provides maximum adjustability
- Interchangeable lenses available for multiple beam angles (sold separately)
- Functions as a downlight, wall wash or accent light
- Adjustability of 65° Tilt, 356° Rotation
- Life Span of 50,000 hours L70
- Compatible with EL490ICA, EL490RICA

Input Power	12.6W
Lumens	840
Color Temp.	3000K
CRI	90+
Input Volt	120V/277V
Damp Location	UL listed
Dimmable	Triac/ELV
Beam Angle	36°




Medium Base Adapter Included

LED Square Adjustable Pull-Down Insert

- For 4" dedicated 120V/277V recessed housings
- Provides maximum adjustability
- Interchangeable lenses available for multiple beam angles (sold separately)
- Functions as a downlight, wall wash or accent light
- Adjustability of 65° Tilt, 356° Rotation
- Life Span of 50,000 hours L70
- Compatible with EL490ICA, EL490RICA

Input Power	12.6W
Lumens	840
Color Temp.	3000K
CRI	90+
Input Volt	120V/277V
Damp Location	UL listed
Dimmable	Triac/ELV
Beam Angle	36°



White
EL44727W

840 lm
2700K
12.6W

EL44730W

840 lm
3000K
12.6W

Black
EL44727B

840 lm
2700K
12.6W

EL44730B

840 lm
3000K
12.6W

Bronze
EL44727BZ

840 lm
2700K
12.6W

EL44730BZ

840 lm
3000K
12.6W

Nickel
EL44727N

840 lm
2700K
12.6W

EL44730N

840 lm
3000K
12.6W

4" Round LED Bi-Pin Inserts

Perfect for Retrofitting Low Voltage Housings to LED



EL14027W
550 lm
2700K
8W


EL14030W
550 lm
3000K
8W

EL14040W
550 lm
4000K
8W

LED Bi-Pin Insert Baffle Trim

- Fits 4" Low Voltage housings
- Bi-Pin socket for MR16 retrofit
- Baffle reduces stray light
- Life Span of 50,000 hours L70
- Compatible with EL1499ICA, EL1499A, EL1499RA, EL1499EA, EL1499REA, EL1499LDICA, EL1499LDRICA, EL1499LDICEA, EL1499LDRICEA

Input Power	8W
Lumens	550
Color Temp.	2700K - 4000K
CRI	90+
Input Volt	12V
Damp Location	ETL listed
Dimmable	Triac/ELV



EL14127W
550 lm
2700K
8W


EL14130W
550 lm
3000K
8W

EL14140W
550 lm
4000K
8W

LED Bi-Pin Insert Reflector Trim

- Fits 4" Low Voltage housings
- Bi-Pin socket for MR16 retrofit
- Soft white lens provides smooth lumen distribution
- Life Span of 50,000 hours L70
- Compatible with EL1499ICA, EL1499A, EL1499RA, EL1499EA, EL1499REA, EL1499LDICA, EL1499LDRICA, EL1499LDICEA, EL1499LDRICEA

Input Power	8W
Lumens	550
Color Temp.	2700K - 4000K
CRI	90+
Input Volt	12V
Damp Location	ETL listed
Dimmable	Triac/ELV



5" Dedicated LED IC Housings



EL570ICA


EL570ICA-7 (277V)

(Includes step-down transformer 277V–120V)

5" IC Airtight New Construction Housing

- Single wall IC Rated for use in insulated ceilings
- Housing with Quick Connect for easy insert installation
- Meets restricted air flow requirements (per astm e-283)
- Captive hanger bars span 24" can be repositioned at 90°
- Height allows for use in 2x8 construction
- Adjustable housings accommodates up to 1 1/4" ceiling thickness
- UL listed for damp location
- UL listed for wet location (with wet location inserts)
- UL listed for feed through
- UL listed for direct contact with insulation
- CA Title 24 compliant
- EL570ICA-7 Includes step-down transformer 277V–120V

Input Voltage	120V
Input Power	24W MAX.

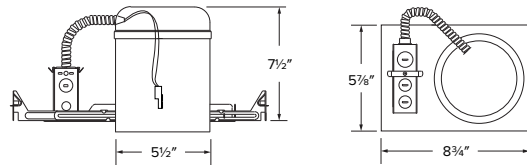


EL570RICA

5" IC Airtight Remodel Housing

- Single wall IC Rated for use in insulated ceilings
- Housing with Quick Connect for easy insert installation
- Meets restricted air flow requirements (per astm e-283)
- (4) Remodel clips secure housing
- Height allows for use in 2x8 construction
- Adjustable housings accommodates up to 1 1/4" ceiling thickness
- UL listed for damp location
- UL listed for wet location (with wet location inserts)
- UL listed for feed through
- UL listed for direct contact with insulation
- CA Title 24 compliant

Input Voltage	120V
Input Power	24W MAX.

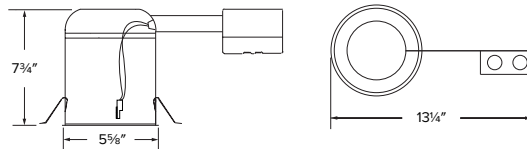

5" Dedicated Shallow LED IC Housings



EL560ICA


EL560ICA-7 (277V)

(Includes step-down transformer 277V–120V)

5" IC Airtight Shallow New Construction Housing

- Single wall IC Rated for use in insulated ceilings
- Housing with Quick Connect for easy insert installation
- Meets restricted air flow requirements (per astm e-283)
- Captive hanger bars span 24" can be repositioned at 90°
- Height allows for use in 2x6 construction
- Adjustable housings accommodates up to 1 1/4" ceiling thickness
- UL listed for damp location
- UL listed for wet location (with wet location inserts)
- UL listed for feed through
- UL listed for direct contact with insulation
- CA Title 24 compliant
- EL560ICA-7 Includes step-down transformer 277V–120V

Input Voltage	120V
Input Power	17W MAX.

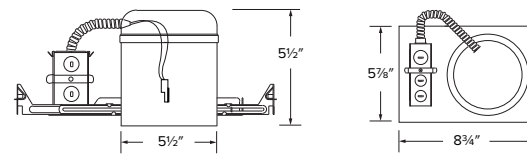


EL560RICA


5" IC Airtight Shallow Remodel Housing

- Single wall IC Rated for use in insulated ceilings
- Housing with Quick Connect for easy insert installation
- Meets restricted air flow requirements (per astm e-283)
- (4) Remodel clips secure housing
- Height allows for use in 2x6 construction
- Adjustable housings accommodates up to 1 1/4" ceiling thickness
- UL listed for damp location
- UL listed for wet location (with wet location inserts)
- UL listed for feed through
- UL listed for direct contact with insulation
- CA Title 24 compliant

Input Voltage	120V
Input Power	17W MAX.

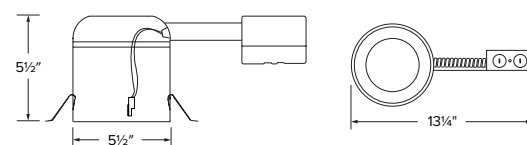

5" Round LED Inserts

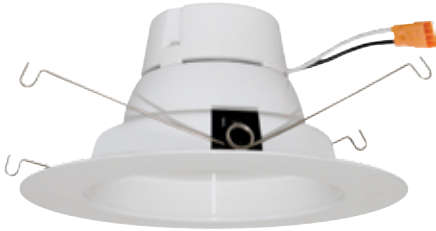


EL61030W	EL61040W	EL61130W	EL61140W	EL61230W*
875 lm	950 lm	1100 lm	1200 lm	1350 lm
3000K	4000K	3000K	4000K	3000K
12W	12W	16W	16W	22W

*Not for use in Shallow Housings

LED Insert Baffle Trim

- Fits 5" or 6" dedicated 120V recessed housings
- Baffle reduces stray light
- Soft white lens provides smooth lumen distribution
- 5 Lumen packages, up to 1350 lm
- Medium base adapter included
- Life Span of 50,000 hours L70
- Compatible with EL560ICA, EL560RICA, EL570ICA, EL570RICA

Input Power	12W - 22W
Lumens	875 - 1350
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	120V
Wet Location	UL listed
Dimmable	Triac/ELV
Beam Angle	90°



Medium Base Adapter Included



White	White	White
EL61527W	EL61530W	EL61535W
700 lm	730 lm	750 lm
2700K	3000K	3500K
11W	11W	11W

Bronze	Bronze
EL61527BZ	EL61530BZ
700 lm	730 lm
2700K	3000K
11W	11W


White	White
EL61540W	EL61550W
775 lm	800 lm
4000K	5000K
11W	11W

Bronze
EL61535BZ
750 lm
3500K
11W

LED Insert Reflector Trim

- Fits 5" or 6" dedicated 120V recessed housings
- Soft white lens provides smooth lumen distribution
- Medium base adapter included
- Life Span of 50,000 hours L70
- Compatible with EL560ICA, EL560RICA, EL570ICA, EL570RICA

Input Power	11W
Lumens	700 - 800
Color Temp.	2700K - 5000K
CRI	90+
Input Volt	120V
Damp Location	UL listed
Dimmable	Triac/ELV



Medium Base Adapter Included

5" Square LED Inserts



EL55130W

1060 lm
3000K
15W




EL55230W

1100 lm
3000K
15W

LED Insert Square Baffle Trim

- Fits 5" dedicated 120V recessed housings
- Fully diecast design provides long lasting durability
- Soft white lens provides smooth lumen distribution
- Rotates +45° for alignment
- Medium base adapter included
- Life Span of 50,000 hours L70
- Compatible with EL560ICA, EL560RICA, EL570ICA, EL570RICA

Input Power	15W
Lumens	1060
Color Temp.	3000K
CRI	90+
Input Volt	120V
Wet Location	UL listed
Dimmable	Triac/ELV




Medium Base Adapter
Included

LED Insert Square Reflector Trim

- Fits 5" dedicated 120V recessed housings
- Fully diecast design provides long lasting durability
- Soft white lens provides smooth lumen distribution
- Rotates +45° for alignment
- Medium base adapter included
- Life Span of 50,000 hours L70
- Compatible with EL560ICA, EL560RICA, EL570ICA, EL570RICA

Input Power	15W
Lumens	1100
Color Temp.	3000K
CRI	90+
Input Volt	120V
Wet Location	UL listed
Dimmable	Triac/ELV



Medium Base Adapter
Included

5" Adjustable LED Inserts



White
EL59727W
 840 lm
 2700K
 12.6W

EL59730W
 840 lm
 3000K
 12.6W



Black
EL59727B
 840 lm
 2700K
 12.6W

EL59730B
 840 lm
 3000K
 12.6W




Bronze
EL59727BZ
 840 lm
 2700K
 12.6W

EL59730BZ
 840 lm
 3000K
 12.6W

LED Adjustable Pull-Down Insert

- For 5" dedicated 120V/277V recessed housings
- Provides maximum adjustability
- Interchangeable lenses available for multiple beam angles (sold separately)
- Functions as downlight, wall wash or accent light
- Adjustability of 65° Tilt, 356° Rotation
- Life Span of 50,000 hours L70
- Compatible with EL560ICA, EL560RICA, EL570ICA, EL570RICA

Input Power	12.6W
Lumens	840
Color Temp	3000K
CRI	90+
Input Voltage	120V/277V
Damp Location	UL listed
Dimmable	Triac/ELV
Beam Angle	36°



Medium Base Adapter
Included

Interchangeables Lens for LED Adjustable Pull-Down Insert



EP710C
20° Beam

EP712C
60° Beam



6" Dedicated LED IC Housings



EL770ICA


EL770ICA-7 (277V)

(Includes step-down transformer 277V–120V)

6" IC Airtight New Construction Housing

- Single wall IC Rated for use in insulated ceilings
- Housing with 2-Wire Quick Connect for easy insert installation
- Meets restricted air flow requirements (per ASTM E-283)
- Captive hanger bars span 24" can be repositioned at 90°
- Height allows for use in 2x8 construction
- Adjustable housings accommodates up to 1 1/4" ceiling thickness
- UL listed for damp location
- UL listed for wet location (with wet location inserts)
- UL listed for feed through
- UL listed for direct contact with insulation
- CA Title 24 compliant
- EL770ICA-7 Includes step-down transformer 277V–120V

Input Voltage	Input Power
120V	24W MAX.

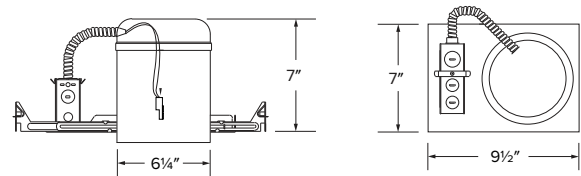


EL770RICA

6" IC Airtight Remodel Housing

- Single wall IC Rated for use in insulated ceilings
- Housing with Quick Connect for easy insert/trim installation
- Meets restricted air flow requirements (per ASTM E-283)
- (4) Remodel clips secure housing
- Height allows for use in 2x8 construction
- Adjustable housings accommodates up to 1 1/4" ceiling thickness
- UL listed for damp location
- UL listed for wet location (with wet location inserts)
- UL listed for feed through
- UL listed for direct contact with insulation
- CA Title 24 compliant

Input Voltage	Input Power
120V	24W MAX.

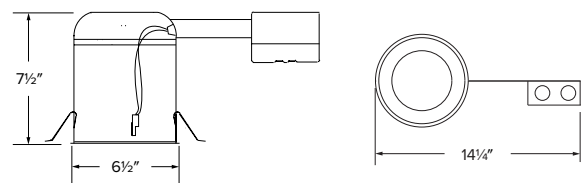

6" Dedicated LED Shallow **IC Housings**



EL760ICA


EL760ICA-7 (277V)

(Includes step-down transformer 277V-120V)

6" IC Airtight Shallow New Construction Housing

- Single wall IC Rated for use in insulated ceilings
- Housing with 2-Wire Quick Connect for easy insert installation
- Meets restricted air flow requirements (per ASTM E-283)
- Captive hanger bars span 24" can be repositioned at 90°
- Height allows for use in 2x6 construction
- Adjustable housings accommodates up to 1 1/4" ceiling thickness
- UL listed for damp location
- UL listed for wet location (with wet location inserts)
- UL listed for feed through
- UL listed for direct contact with insulation
- CA Title 24 compliant
- EL760ICA-7 Includes step-down transformer 277V-120V

Input Voltage	Input Power
120V	17W MAX.

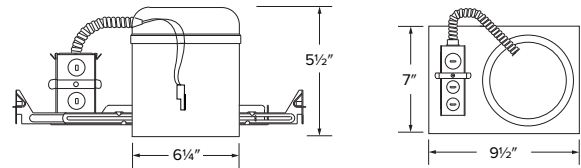


EL760RICA

6" IC Airtight Shallow Remodel Housing

- Single wall IC Rated for use in insulated ceilings
- Housing with 2-Wire Quick Connect for easy insert installation
- Meets restricted air flow requirements (per ASTM E-283)
- (4) Remodel clips secure housing
- Height allows for use in 2x6 construction
- Adjustable housings accommodates up to 1 1/4" ceiling thickness
- UL listed for damp location
- UL listed for wet location (with wet location inserts)
- UL listed for feed through
- UL listed for direct contact with insulation
- CA Title 24 compliant

Input Voltage	Input Power
120V	17W MAX.

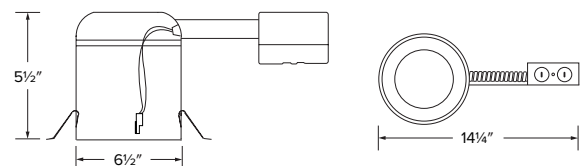

6" LED Insert & Interchangeable Trims




ELD7RT1427	ELD7RT1430	ELD7RT1440
800 lm	850 lm	900 lm
2700K	3000K	4000K
14W	14W	14W

LED Insert for Interchangeable Trims

- Insert Base includes LED, heat sink and driver
- Interchangeable trim ordered separately
- Medium base adapter included
- Life Span of 50,000 hours L70
- Compatible with EL760ICA, EL760RICA, EL770ICA, EL770RICA

Input Power	14W
Lumens	800 - 900
Color Temp	2700K - 4000K
CRI	90+
Input Voltage	120V
Wet Location	UL listed
Dimmable	Triac/ELV
Beam Angle	80°



Medium Base Adapter Included

Reflector Trims



Baffle Trims



6" Round LED Inserts




EL61030W	EL61040W	EL61130W	EL61140W	EL61230W*
875 lm	950 lm	1100 lm	1200 lm	1350 lm
3000K	4000K	3000K	4000K	3000K
12W	12W	16W	16W	22W

*Not for use in Shallow Housings

LED Insert Baffle Trim

- Fits 5" or 6" dedicated 120V recessed housings
- Baffle reduces stray light
- Soft white lens provides smooth lumen distribution
- 5 Lumen packages, up to 1350 lm
- Medium base adapter included
- Life Span of 50,000 hours L70
- Compatible with EL760ICA, EL760RICA, EL770ICA, EL770RICA

Input Power	12W - 22W
Lumens	875 - 1350
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	120V
Wet Location	UL listed
Dimmable	Triac/ELV
Beam Angle	90°



Medium Base Adapter Included




White			Bronze	
EL61527W	EL61530W	EL61535W	EL61527BZ	EL61530BZ
700 lm	730 lm	750 lm	700 lm	730 lm
2700K	3000K	3500K	2700K	3000K
11W	11W	11W	11W	11W
White			Bronze	
EL61540W	EL61550W		EL61535BZ	
775 lm	800 lm		750 lm	
4000K	5000K		3500K	
11W	11W		11W	

LED Insert Reflector Trim

- Fits 5" or 6" dedicated 120V recessed housings
- Soft white lens provides smooth lumen distribution
- Medium base adapter included
- Life Span of 50,000 hours L70
- Compatible with EL760ICA, EL760RICA, EL770ICA, EL770RICA

Input Power	11W
Lumens	700 - 800
Color Temp.	2700K - 5000K
CRI	90+
Input Volt	120V
Damp Location	UL listed
Dimmable	Triac/ELV



Medium Base Adapter Included

6" Square LED Inserts



EL66130W

1200 lm
3000K
16W




EL66230W

1200 lm
3000K
16W

LED Insert Baffle Trim

- Fits 6" dedicated 120V recessed housings
- Fully diecast design provides long lasting durability
- Soft white lens provides smooth lumen distribution
- Rotates +45° for alignment
- Medium base adapter included
- Life Span of 50,000 hours L70
- Compatible with EL760ICA, EL760RICA, EL770ICA, EL770RICA

Input Power	16W
Lumens	1200
Color Temp	3000K
CRI	90+
Input Voltage	120V
Wet Location	UL listed
Dimmable	Triac/ELV




Medium Base Adapter
Included

LED Insert Reflector Trim

- Fits 6" dedicated 120V recessed housings
- Fully diecast design provides long lasting durability
- Soft white lens provides smooth lumen distribution
- Rotates +45° for alignment
- Medium base adapter included
- Life Span of 50,000 hours L70
- Compatible with EL760ICA, EL760RICA, EL770ICA, EL770RICA

Input Power	16W
Lumens	1200
Color Temp	3000K
CRI	90+
Input Voltage	120V
Wet Location	UL listed
Dimmable	Triac/ELV



Medium Base Adapter
Included

6" Adjustable LED Inserts



White
EL61327W
1100 lm
2700K
17W



Black
EL61330B
1150 lm
3000K
17W



White
EL69727W
840 lm
2700K
12.6W



Black
EL69727B
840 lm
2700K
12.6W



Bronze
EL69727BZ
840 lm
2700K
12.6W



Nickel
EL69727N
840 lm
2700K
12.6W

EL69730W
840 lm
3000K
12.6W

EL69730B
840 lm
3000K
12.6W

EL69730BZ
840 lm
3000K
12.6W

EL69730N
840 lm
3000K
12.6W

Interchangeables Lens for
LED Adjustable Pull-Down Insert




EP710C
20° Beam

EP712C
60° Beam

LED Gimbal Insert Trim

- Fits 5" or 6" dedicated 120V recessed housings
- Adjustable to function as a downlight or accent light
- Soft white lens provides smooth lumen distribution
- Medium base adapter included
- Adjustability of 25° Tilt, 356° Rotation
- Life Span of 50,000 hours L70
- Compatible with EL760ICA, EL760RICA, EL770ICA, EL770RICA

Input Power	17W
Lumens	1100 - 1150
Color Temp	2700K - 3000K
CRI	90+
Input Voltage	120V
Damp Location	UL listed
Dimmable	Triac/ELV




Medium Base Adapter
Included

LED Adjustable Pull-Down Insert

- For 6" dedicated 120V/277V recessed housings
- Provides maximum adjustability
- Interchangeable lenses available for multiple beam angles (sold separately)
- Functions as downlight, wall wash or accent light
- Medium base adapter included
- Adjustability of 65° Tilt, 356° Rotation
- Life Span of 50,000 hours L70
- Compatible with EL760ICA, EL760RICA, EL770ICA, EL770RICA

Input Power	12.6W
Lumens	840
Color Temp	2700K - 3000K
CRI	90+
Input Voltage	120V/277V
Damp Location	UL listed
Dimmable	Triac/ELV
Beam Angle	36°



Medium Base Adapter
Included



LED Disk Lights & Decorative Flush Mount Lights

4" LED Disk Lights	34
6" Ceiling Mount LED Disk Lights	35
LED Decorative Flush Mount Lights	38

Ceiling Mount LED **Disk Lights**

Surface Junction Box OR Recessed Housing



Compatible Junction Boxes	ELSF4030	ELSF4230	ELSF1030	ELSF1130	ELSF1230
Square Junction Box					
4"x4" x 2-1/8"				✓	
4"x4" x 3-1/2"				✓	
Octagon Junction Box					
4"x4" x 1-1/2"	✓	✓	✓	✓	✓
4"x4" x 2-1/8"	✓	✓	✓	✓	✓
4"x4" x 3-1/2"	✓	✓	✓	✓	✓
Round Ceiling/Fixture box - Old Work					
4-1/4" Diameter x 2-5/8" Depth	✓	✓	✓	✓	✓
4-1/4" Diameter x 2-3/4" Depth	✓	✓	✓	✓	✓
Round Ceiling Box, Nail On					
4" Diameter x 2-3/8" Depth	✓	✓	✓	✓	✓
4" Diameter x 2-7/16" Depth	✓	✓	✓	✓	✓
Adjustable Round Electrical Box					
4" Diameter x 2-3/8" Depth	✓	✓	✓	✓	✓

4" LED Disk Light



White
ELSF4030W
750 lm
3000K
11W

Bronze
ELSF4030BZ
750 lm
3000K
11W

Nickel
ELSF4030N
750 lm
3000K
11W




ELSF4230W
650 lm
3000K
10W

Alva LED Disk Light (Wet Location)

- LED Disk Light with curved edge
- Fits 4" Recessed Line Voltage Housings or installs in a standard 4" Octagon or Round Junction Box
- Features Quick Connect for easy installation
- Mounting hardware included
- Life Span of 50,000 hours L70
- Compatible with EL490ICA, EL490RICA, EL492ICA, EL492RICA, 4" Octagon or Round Junction Box

Input Power	11W
Lumens	750
Color Temp	3000K
CRI	90+
Input Voltage	120V
Wet Location	UL listed
Dimmable	Triac/ELV




Medium Base Adapter
Included

Colby LED Disk Light

- LED Disk Light Insert with straight edge
- Installs in a standard 4" Octagon or Round Junction Box
- Features Quick Connect for easy installation
- Mounting hardware included
- Life Span of 50,000 hours L70
- Compatible with 4" Octagon or Round Junction Box

Input Power	10W
Lumens	650
Color Temp	3000K
CRI	90+
Input Voltage	120V
Damp Location	ETL listed
Dimmable	Triac/ELV



Medium Base Adapter
Included

6" LED Disk Light




White	White
ELSF1030W	ELSF1040W
750 lm	750 lm
3000K	4000K
11.5W	11.5W

Arvid LED Disk Light

- LED Disk Light with beveled edge
- Fits 5" and 6" Recessed Line Voltage Housings or installs in a standard 4" Octagon or Round Junction Box
- Features Quick Connect for easy installation
- Mounting hardware included
- Life Span of 50,000 hours L70
- Compatible with EL770ICA, EL770RICA, EL760ICA, EL760RICA, EL570ICA, EL570RICA, EL560ICA, EL560RICA, 4" Octagon or Round Junction Box

Input Power	11.5W
Lumens	750
Color Temp	3000K - 4000K
CRI	90+
Input Voltage	120V
Damp Location	ETL listed
Dimmable	Triac/ELV



Medium Base Adapter Included




White	Bronze	Nickel
ELSF1130W	ELSF1130BZ	ELSF1130N
900 lm	900 lm	900 lm
3000K	3000K	3000K
13W	13W	13W

Alva LED Disk Light (Wet Location)

- LED Disk Light with curved edge
- Fits 5" and 6" Recessed Line Voltage Housings or installs in a standard 4" Square, Octagon or Round Junction Box
- Mounting hardware included
- Life Span of 50,000 hours L70
- Compatible with EL770ICA, EL770RICA, EL760ICA, EL760RICA, EL570ICA, EL570RICA, EL560ICA, EL560RICA, 4" Square, Octagon or Round Junction Box

Input Power	13W
Lumens	900
Color Temp	3000K
CRI	90+
Input Voltage	120V
Wet Location	UL listed
Dimmable	Triac/ELV



Medium Base Adapter Included

6" LED Disk Light




ELSF1230W

830 lm
3000K
13.5W

Colby LED Disk Light

- LED Disk Light with straight edge
- Installs in a standard 4" Octagon or Round Junction Box
- Mounting hardware included
- Life Span of 50,000 hours L70
- Compatible with 4" Octagon or Round Junction Box

Input Power	13.5W
Lumens	830
Color Temp	3000K
CRI	90+
Input Voltage	120V
Damp Location	ETL listed
Dimmable	Yes



Medium Base Adapter
Included




ELSF2230W

830 lm
3000K
13.5W

Square Colby LED Disk Light

- LED Square Disk Light with Straight Edge
- Installs in a standard 4" Octagon or Round Junction Box
- Mounting hardware included
- Life Span of 50,000 hours L70
- Compatible with 4" Octagon or Round Junction Box

Input Power	13.5W
Lumens	830
Color Temp	3000K
CRI	90+
Input Voltage	120V
Damp Location	ETL listed
Dimmable	Yes



Medium Base Adapter
Included

6" LED Disk Light



ELSF1330W

700 lm
3000K
13W




ELSF1430W

700 lm
3000K
10W

Bodi LED Disk Light (Wet Location)

- Installs in a standard 4" Octagon or Round Junction Box
- Mounting hardware included
- Life Span of 50,000 hours L70
- Compatible with 4" Octagon or Round Junction Box

Input Power	13W
Lumens	700
Color Temp	3000K
CRI	90+
Input Voltage	120V
Wet Location	UL listed
Dimmable	Yes

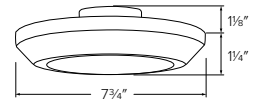


Medium Base Adapter
Included

Egji LED Disk Light (Wet Location)

- Installs in a standard 4" Octagon or Round Junction Box
- Mounting hardware included
- Life Span of 50,000 hours L70
- Compatible with 4" Octagon or Round Junction Box

Input Power	10W
Lumens	600
Color Temp	3000K
CRI	90+
Input Voltage	120V
Wet Location	UL listed
Dimmable	Yes

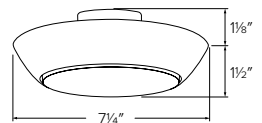

Medium Base Adapter
Included

LED Decorative Flush Mount **Lights**



Nickel



Bronze

STANDARD

10"	
Nickel	Nickel
ELD11030W	ELD11040W
980 lm	1010 lm
3000K	4000K
14W	14W
12"	
Nickel	Nickel
ELD11230W	ELD11240W
1260 lm	1330 lm
3000K	4000K
18W	18W
14"	
Nickel	Nickel
ELD11430W	ELD11440W
1540 lm	1630 lm
3000K	4000K
22W	22W
16"	
Nickel	Nickel
ELD11630W	ELD11640W
1820 lm	1930 lm
3000K	4000K
26W	26W
18"	
Nickel	
ELD11840W	
2100 lm	
4000K	
30W	


HIGH LUMEN

10"			
Nickel	Nickel	Bronze	Bronze
ELD21030W	ELD21040W	ELD21030BZ	ELD21040BZ
1170 lm	1260 lm	1170 lm	1260 lm
3000K	4000K	3000K	4000K
18W	18W	18W	18W
12"			
Nickel	Nickel	Bronze	Bronze
ELD21230W	ELD21240W	ELD21230BZ	ELD21240BZ
1430 lm	1550 lm	1430 lm	1550 lm
3000K	4000K	3000K	4000K
22W	22W	22W	22W
14"			
Nickel	Nickel	Bronze	Bronze
ELD21430W	ELD21440W	ELD21430BZ	ELD21440BZ
1690 lm	1820 lm	1690 lm	1820 lm
3000K	4000K	3000K	4000K
26W	26W	26W	26W
16"			
Nickel	Nickel	Bronze	Bronze
ELD21630W	ELD21640W	ELD21630BZ	ELD21640BZ
1950 lm	2100 lm	1950 lm	2100 lm
3000K	4000K	3000K	4000K
30W	30W	30W	30W

Darby LED Flush Mount

- LED Decorative Ceiling Mount Lights
- Stylish brushed nickel finish fixture with polycarbonate lens for smooth lumen distribution
- Suitable for hard wire installation into a standard 4" Octagon or Round Junction Box
- Available in 10", 12", 14", 16" & 18" diameters
- Meets ENERGY STAR requirements
- Life Span of 50,000 hours L70
- Compatible with standard 4" Octagon or Round Junction Box

Input Power	14W - 30W
Lumens	1010 - 2100
Color Temp	3000K - 4000K
CRI	90+
Input Voltage	120V
Damp Location	UL listed
Dimmable	Triac/ELV



Size	Diameter	Height
10"	9 ⁷ / ₈ "	2 ³ / ₄ "
12"	12 ¹ / ₈ "	3 ³ / ₈ "
14"	14 ¹ / ₈ "	3 ³ / ₄ "
16"	16 ¹ / ₈ "	4 ³ / ₄ "
18"	18 ¹ / ₈ "	4 ³ / ₄ "

LED Decorative Flush Mount **Lights**



STANDARD

ELD31240W

980 lm
4000K
14W

ELD31440W

1260 lm
4000K
18W

ELD31640W

1540 lm
4000K
22W

HIGH LUMEN

ELD32240W

1550 lm
4000K
22W

ELD32440W

1820 lm
4000K
26W

ELD32640W

2100 lm
4000K
30W

12"

14"

16"

Dustin LED flush mount

- LED Decorative Ceiling Mount Lights
- Energy efficient fixture with white polycarbonate lens
- Suitable for hard wire installation into a standard 4" Octagon or Round Junction Box
- Available in 12", 14" & 16" diameters
- Meets ENERGY STAR requirements
- Life Span of 50,000 hours L70
- Compatible with standard 4" Octagon or Round Junction Box

Input Power 14W - 22W

Lumens 980 - 1540


Color Temp 4000K

CRI 90+

Input Voltage 120V

Damp Location UL listed

Dimmable Triac/ELV

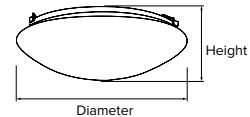

Size	Diameter	Height
12"	12 $\frac{1}{8}$ "	3 $\frac{3}{8}$ "
14"	14 $\frac{1}{8}$ "	3 $\frac{3}{4}$ "
16"	16 $\frac{1}{8}$ "	4 $\frac{3}{8}$ "

Accessories



FIRECVR
Fire Cover

Recessed fire cover stops flame spread and heat transmission for up to 2 hours. UL rated. UL approved for most major ceiling types. Made of heat activated intumescent material.



FIREENCL
Fire Enclosure

Flexible mica fire enclosure for recessed fixtures. ETL approved for 1-Hour fire resistance. Easy to install. To be used with Mica Fire Tape (sold separately) to seal the power feeding points. Meets the specifications of UL 263, ASTH E119.



FIRETAPE
Mica Fire Tape

Fire proof mica adhesive tape helps seal the power feeding point on Fire Enclosure (FIREENCL). Offers outstanding high temperature and flame resistance, and provides excellent electrical insulating. Measures 3/4" x 6 1/2'.



ELJ442 (4"x4"x2 1/8")
ELJ443 (4"x4"x3 1/2")
2-Hour Fire Rated Junction Box

Fire rated junction box constructed from 16 gauge galvanized steel. 2 hour fire rating.



EP710C (20° Beam)
EP711C (36° Beam)
EP712C (60° Beam)
Interchangeables Lens

Interchangeables lens for LED Adjustable Pull-Down Inserts.



PSA30
Socket Adaptor

Socket adaptor E26 to quick connector.



PSA31
Socket Adaptor

Socket adaptor GU10 to quick connector.



PSA35
Socket Adaptor

Socket adaptor GU24 to quick connector.



MR120-GU10LD
LED GU10 Lamp

7W, 500 lm, 3000K, CRI 90, 120V, dimmable.



PSA34
LED Lamp

7W LED COB lamp with medium base socket. 500 lm, 3000K, CRI 90, dimmable, 120V.



PSA37
Quick Connect LED MR16 Lamp

7W LED COB lamp with quick connector. 500 lm, 3000K, CRI 90, dimmable, 120V.

Dimming Range Specifications

EL31127, EL31130, EL31227, EL31230, EL33130, EL33230,
EL44030, EL44130, EL44230, EL55130, EL55230, EL66130,
EL66230, ELSF1030W, ELSF1130, ELSF4030W,

Manufacturer	Model No.	Dimming Range
LUTRON	DVW-603P	5% - 100%
LUTRON	MACL-153M	10% - 100%
LUTRON	DV-600PR	5% - 100%
LEVITON	1A3306	5% - 100%
LEVITON	1G1306	5% - 100%

EL41430, EL61330

Manufacturer	Model No.	Dimming Range
LUTRON	DVWCL-153P	5% - 100%
LUTRON	CTCL-153PD	5% - 100%
LUTRON	TGCL-153P	5% - 100%
LEVITON	6672	10% - 100%
LEVITON	6674	10% - 100%

EL39730, EL49730, EL59730, EL69730

Manufacturer	Model No.	Dimming Range
LUTRON	DVCL-153P	5% - 100%
LUTRON	S-600P	10% - 100%
LEVITON	IPI06	4% - 100%
LEVITON	6631-LA	5% - 100%

EL61230, EL41330

Manufacturer	Model No.	Dimming Range
LUTRON	AY-600P	10% - 100%
LUTRON	DV-603P	10% - 100%
LEVITON	6683	10% - 100%
LEVITON	6684	10% - 100%
LEGRAND	DRD4	10% - 100%

ELD4RT1227, ELD4RT1230, ELD4RT1240, ELD7RT1427, ELD7RT1440

Manufacturer	Model No.	Dimming Range
COOPER	DLC03P	5% - 100%
COOPER	SLC03P	5% - 100%
LEVITON	IPI06-1LZ	7% - 100%
LEVITON	6631-2	10% - 100%
LUTRON	S-603P	7% - 100%
LUTRON	DVCL-153P	5% - 100%
LIGHTOLIER	ZP260GEW	5% - 100%

ELSF1130, ELSF1230

Manufacturer	Model No.	Dimming Range
LEVITON	6673-10W	10% - 100%
LEVITON	VPI06-1LZ	5% - 100%
LEVITON	ATT06-1LW	5% - 100%
LEVITON	6613-PLW	10% - 100%
LEVITON	6633-PLW	10% - 100%
LEVITON	IPI06-1LZ	5% - 100%

EL41030, EL41040, EL41230, EL61030, EL61040, EL61130, EL61140

Manufacturer	Model No.	Dimming Range
LUTRON	DV-603P	10% - 100%
LUTRON	LGCL-153CL	5% - 100%
LUTRON	MAW-600H	10% - 100%
LUTRON	S-600P	10% - 100%
LEVITON	S-600P	10% - 100%
LEVITON	6631-LA	10% - 100%

EL41530W, EL61530

Manufacturer	Model No.	Dimming Range
LUTRON	CTCL-153P	5% - 100%
LUTRON	MACL-153	5% - 100%
LUTRON	TGCL-153P	5% - 100%
LUTRON	6672-1LW	10% - 100%
LEVITON	6674	10% - 100%
LEVITON	IPL06	5% - 100%

Index

EL390ICA.....8	EL31130W.....9	EL59727B.....24	ELD21230W.....38
EL390ICA-7.....8	EL31227BZ.....9	EL59727BZ.....24	ELD21240BZ.....38
EL390RICA.....8	EL31227W.....9	EL59727W.....24	ELD21240W.....38
EL490ICA.....12	EL31230BZ.....9	EL59730B.....24	ELD21430BZ.....38
EL490ICA-7.....12	EL31230W.....9	EL59730BZ.....24	ELD21430W.....38
EL490RICA.....12	EL33130BZ.....10	EL59730W.....24	ELD21440BZ.....38
EL492ICA.....13	EL33130W.....10	EL61030W.....22, 29	ELD21440W.....38
EL492ICA-7.....13	EL33230BZ.....10	EL61040W.....22, 29	ELD21630BZ.....38
EL492RICA.....13	EL33230W.....10	EL61130W.....22, 29	ELD21630W.....38
EL560ICA.....21	EL39727B.....11	EL61140W.....22, 29	ELD21640BZ.....38
EL560ICA-7.....21	EL39727BZ.....11	EL61230W.....22, 29	ELD21640W.....38
EL560RICA.....21	EL39727N.....11	EL61327B.....31	ELD31240W.....39
EL570ICA.....20	EL39727W.....11	EL61327W.....31	ELD31440W.....39
EL570ICA-7.....20	EL39730B.....11	EL61330B.....31	ELD31640W.....39
EL570RICA.....20	EL39730BZ.....11	EL61330W.....31	ELD32240W.....39
EL760ICA.....27	EL39730N.....11	EL61527BZ.....22, 29	ELD32440W.....39
EL760ICA-7.....27	EL39730W.....11	EL61527W.....22, 29	ELD32640W.....39
EL760RICA.....27	EL41030W.....15	EL61530BZ.....22, 29	ELJ442.....40
EL770ICA.....26	EL41040W.....15	EL61530W.....22, 29	ELJ443.....40
EL770ICA-7.....26	EL41230W.....15	EL61535BZ.....22, 29	ELSF1030W.....35
EL770RICA.....26	EL41330W.....17	EL61535W.....22, 29	ELSF1040W.....35
EL4330B.....14	EL41430B.....17	EL61540W.....22, 29	ELSF1130BZ.....35
EL4330BZ.....14	EL41430W.....17	EL61550W.....22, 29	ELSF1130N.....35
EL4330C.....14	EL41527BZ.....15	EL66130W.....30	ELSF1130W.....35
EL4330CP.....14	EL41527W.....15	EL66230W.....30	ELSF1230W.....36
EL4330W.....14	EL41530BZ.....15	EL69727B.....31	ELSF1330W.....37
EL4331B.....14	EL41530W.....15	EL69727BZ.....31	ELSF1430W.....37
EL4331BZ.....14	EL41535BZ.....15	EL69727N.....31	ELSF2230W.....36
EL4331CP.....14	EL41535W.....15	EL69727W.....31	ELSF4030BZ.....34
EL4331N.....14	EL41540W.....15	EL69730B.....31	ELSF4030N.....34
EL4331W.....14	EL41550W.....15	EL69730BZ.....31	ELSF4030W.....34
EL4351B.....14	EL44130BZ.....16	EL69730N.....31	ELSF4230W.....34
EL4351BZ.....14	EL44130W.....16	EL69730W.....31	EP710C.....18, 24, 31, 40
EL4351N.....14	EL44230BZ.....16	ELD4RT1227.....14	EP711C.....40
EL4351W.....14	EL44230W.....16	ELD4RT1230.....14	EP712C.....18, 24, 31, 40
EL7330B.....28	EL44727B.....18	ELD4RT1240.....14	FIRECVR.....40
EL7330BZ.....28	EL44727BZ.....18	ELD7RT1427.....28	FIREENCL.....40
EL7330C.....28	EL44727N.....18	ELD7RT1430.....28	FIRETAPE.....40
EL7330CP.....28	EL44727W.....18	ELD7RT1440.....28	MR120-GU10LD.....40
EL7330W.....28	EL44730B.....18	ELD11030W.....38	PSA30.....40
EL7331B.....28	EL44730BZ.....18	ELD11040W.....38	PSA31.....40
EL7331BB.....28	EL44730N.....18	ELD11230W.....38	PSA34.....40
EL7331BZ.....28	EL44730W.....18	ELD11240W.....38	PSA35.....40
EL7331CP.....28	EL49727B.....18	ELD11430W.....38	PSA37.....40
EL7331N.....28	EL49727BZ.....18	ELD11440W.....38	
EL7331W.....28	EL49727N.....18	ELD11630W.....38	
EL14027W.....19	EL49727W.....18	ELD11640W.....38	
EL14030W.....19	EL49730B.....18	ELD11840W.....38	
EL14040W.....19	EL49730BZ.....18	ELD21030BZ.....38	
EL14127W.....19	EL49730N.....18	ELD21030W.....38	
EL14130W.....19	EL49730W.....18	ELD21040BZ.....38	
EL14140W.....19	EL55130W.....23	ELD21040W.....38	
EL31127W.....9	EL55230W.....23	ELD21230BZ.....38	

The **Quality** Choice



The **Leading** Choice



The **Timely** Choice



The **Contractor's** Choice



The **Trusted** Choice

Over two and a half decades ago, in the heart of Los Angeles, ELCO Lighting was founded on the philosophy that high quality lighting products should be sold at a fair market price. Our commitment to this philosophy and dedication to exceptional customer service serve as the very soul of our company. We take pride in our perpetual commitment to such standards that enable

us to continually prosper in a highly competitive and unpredictable industry. With our expanding LED product line that entails recessed, track, undercabinet, outdoor and emergency lighting, we are ready to fulfill a variety of lighting demands. Quality engineering, fair market value, professional customer service, and micro-managed inventory are the cornerstones of ELCO Lighting.

ELCAT1041



EL ELCO Lighting

Customer Service

800.522.2626
customerservice@elcolighting.com
sales@elcolighting.com

Corporate Headquarters

2042 East Vernon Avenue
Los Angeles, CA 90058
Telephone 323-231-2600
elcolighting.com

Printed in the USA
\$18.00

© ELCO Lighting. The marks appearing in this catalog are registered trademarks of ELCO Lighting. Other marks used herein are recognized trademarks of their respective companies.

Products shown in this brochure may be covered by U.S. and international patents. Specifications subject to change without notice.