

# Edgar Wall

LO1001, LO1011, LO1021 | 1.0

## GENERATION LIGHTING WALL

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is safety listed for wet locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.


**CAUTION - RISK OF FIRE**  
 This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.  
 Use minimum 90°c supply conductors.

**SAVE THESE INSTRUCTIONS!**

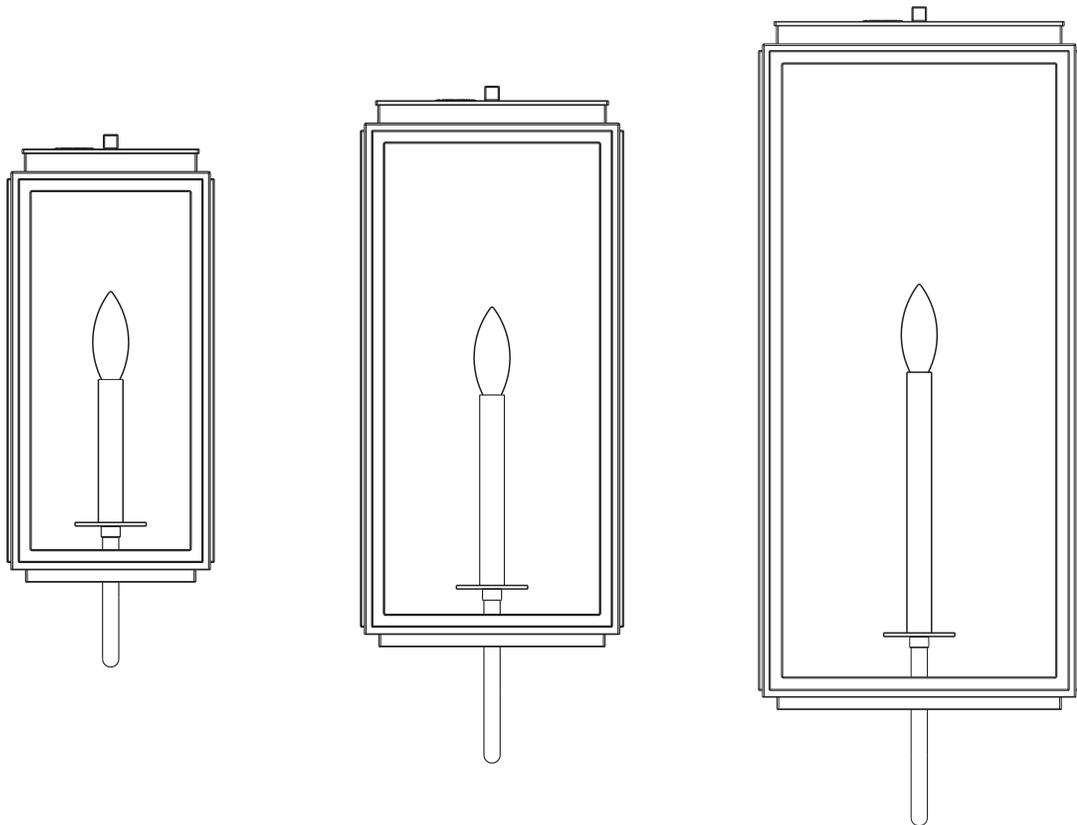

GENERATION LIGHTING  
 7400 Linder Ave., Skokie, IL 60077  
 T 847.410.4400 | F 847.410.4500  
[www.generationlighting.com](http://www.generationlighting.com)

# Install the Fixture

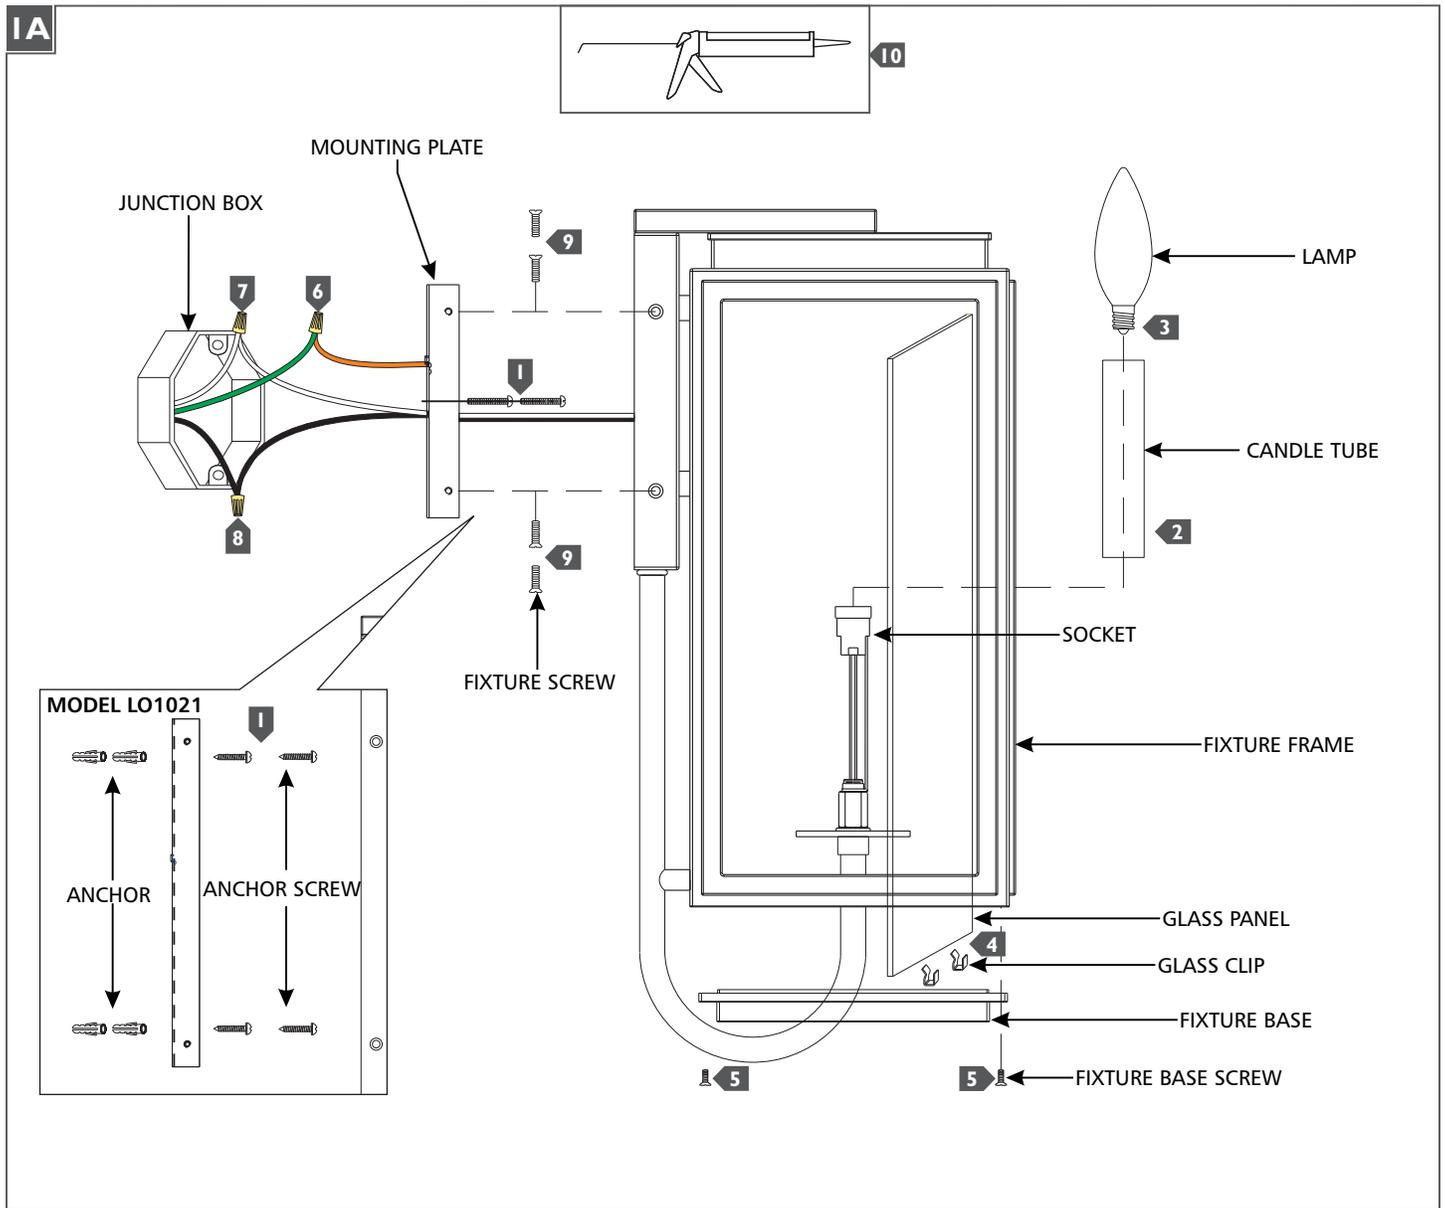

- 1** Secure the mounting plate to the junction box. NOTE: model LO1021 must be secured with anchors and anchor screws.
- 2** Install the candle tube on to the socket assembly.
- 3** Screw the lamp into the socket. Refer to the label on the lamp socket for Max Wattage Information.
- 4** Install the glass panels into the fixture frame and secure them in place with the glass clips.
- 5** Install the fixture base on the bottom of the fixture frame and secure it in place with the provided screws.
- 6** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 7** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 8** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 9** Neatly place all the wires into the junction box, place the fixture base onto the mounting plate, and secure it in place using the fixture screws.
- 10** For wet locations, caulk around the base of the fixture with waterproof construction sealant.