


**Wall MonoRail 4" Round Direct Canopy Single-Feed With LED Transformer**



**DESCRIPTION**

This single-feed flush transformer converts standard 120 line-voltage to 12 volts to provide the necessary voltage for powering a Wall MonoRail low-voltage lighting system. It can power lamps totaling up to 60 watts. The transformer, concealed by a decorative canopy, fits in junction box and features a fast acting secondary circuit breaker that will safely turn the system off should a short occur. Once the short has been removed the unit can be reset by simply flipping the wall switch off and back on.

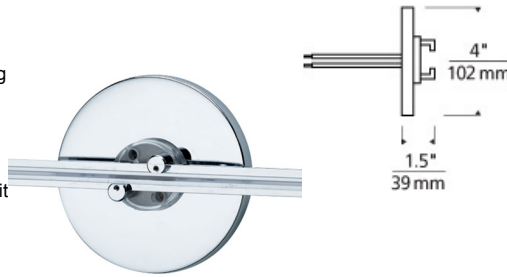

**INSTALLATION**

This product can mount to either a 4" square electrical box with round plaster ring or an octagonal electrical box (not included).

**OTHER**

White finish has satin nickel feeds.

**WEIGHT**

0.95lb / 0.43kg ±



wall monorail 4"  
round direct  
canopy single-  
feed with led  
transformer

**ORDERING INFORMATION**

700WMOP4R60E SHAPE OR SIZE	FINISH
4" ROUND	Z- ANTIQUE BRONZE LED C- CHROME LED S- SATIN NICKEL LED W- WHITE LED

As a general rule when using LED fixtures we do not recommend using greater than 70% of specified maximum wattage on the transformer due to inrush current. for assistance, please contact our technical support department.



**TECH LIGHTING®**  
7400 Linder Avenue      T 847.410.4400  
Skokie, Illinois 60077      F 847.410.4500  
**Tech Lighting, L.L.C.**

700WMOP4R60E \_\_\_\_\_

FIXTURE TYPE: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

NOTES: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

