

WARREN DARK SKY X-SMALL WALL

SLO1221

General Product Information



Tools Required/Suggested



Safety Information

CAUTION-RISK OF FIRE



This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

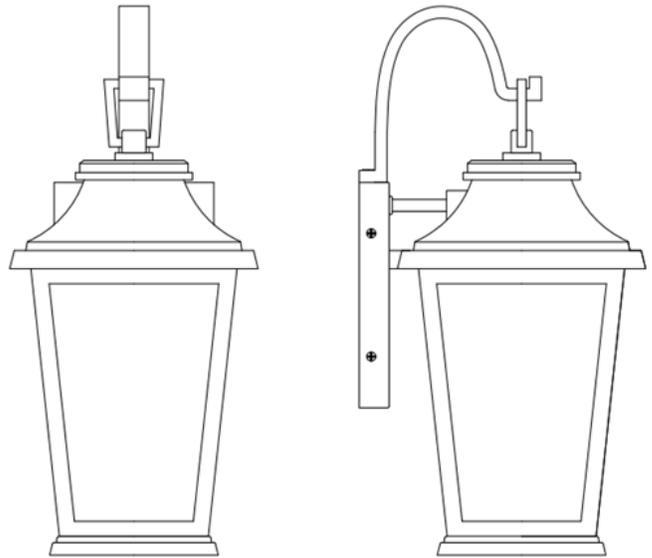

FIXTURE PARTS

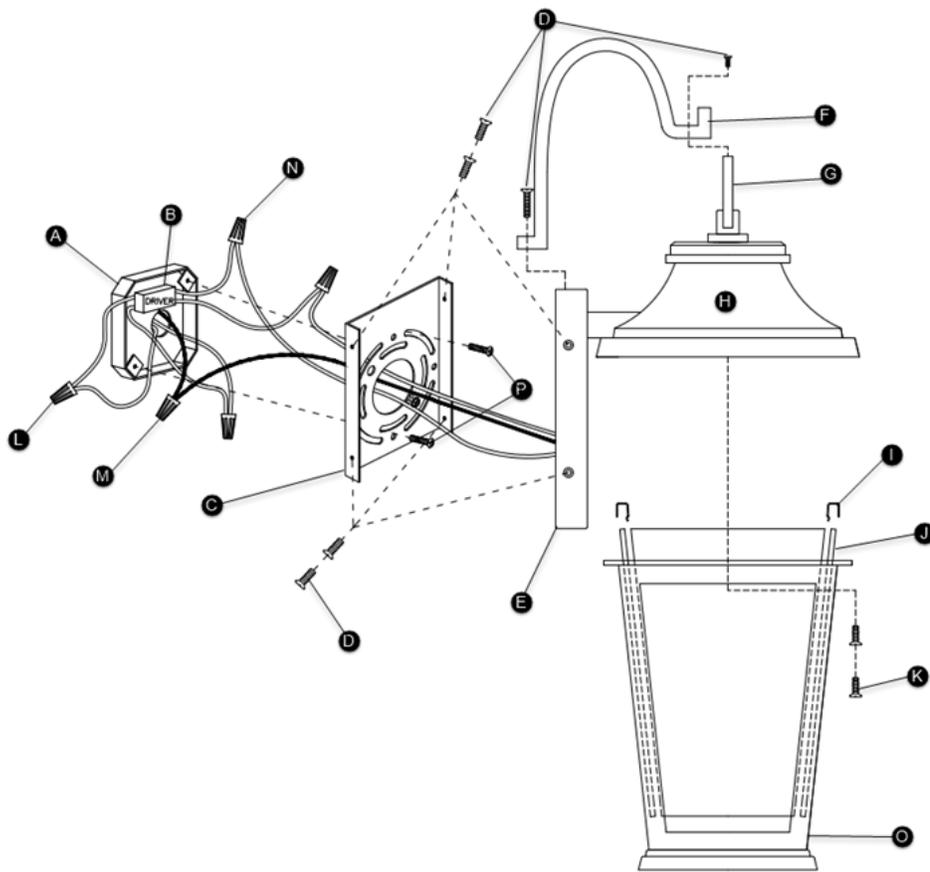

- A. Junction box
- B. Driver
- C. Mounting Plate
- D. Fixture Screws
- E. Fixture Base
- F. Fixture Arm
- G. Fixture Loop
- H. Top Cover
- I. Glass Clip
- J. Glass Panel
- K. Cover Screw
- L. Driver Wires
- M. Ground Wires
- N. Fixture Wires
- O. Lower Cover
- P. Mounting Screws

INSTRUCTIONS

I. Preparing the Fixture

1. Place driver into the junction box. Connect the negative input driver wire to the neutral power line wire with a wire nut. Connect the positive input driver wire to the hot power line wire with a wire nut.
2. Secure the mounting plate to the junction box. Make sure the output driver wires are accessible.
3. Attach the fixture arm to the fixture base and fixture loop with the provided screws.
4. Slide glass panels into the lower cover and secure each panel with clips.

II. Wiring the Fixture

5. Connect the fixture to a suitable ground in accordance with local electrical codes.
6. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Negative (-) fixture wire to the negative (-) output driver wire --negative to negative.
 - b) Positive (+) fixture wire to the positive (+) output driver wire --positive to positive.

III. Installing the Fixture

7. Neatly place wire connections into the junction box.
8. Mount the fixture base onto the mounting plate and secure it with the fixture screws.
9. Install the lower cover to the top cover by using the cover screws.
10. For wet locations, caulk around the base of the fixture with waterproof construction sealant.