

WARREN DARK SKY SMALL WALL

SLO1231

General Product Information













Tools Required/Suggested




Safety Information

**CAUTION-RISK OF FIRE**


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


**USE MINIMUM 90°C SUPPLY CONDUCTORS.**



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

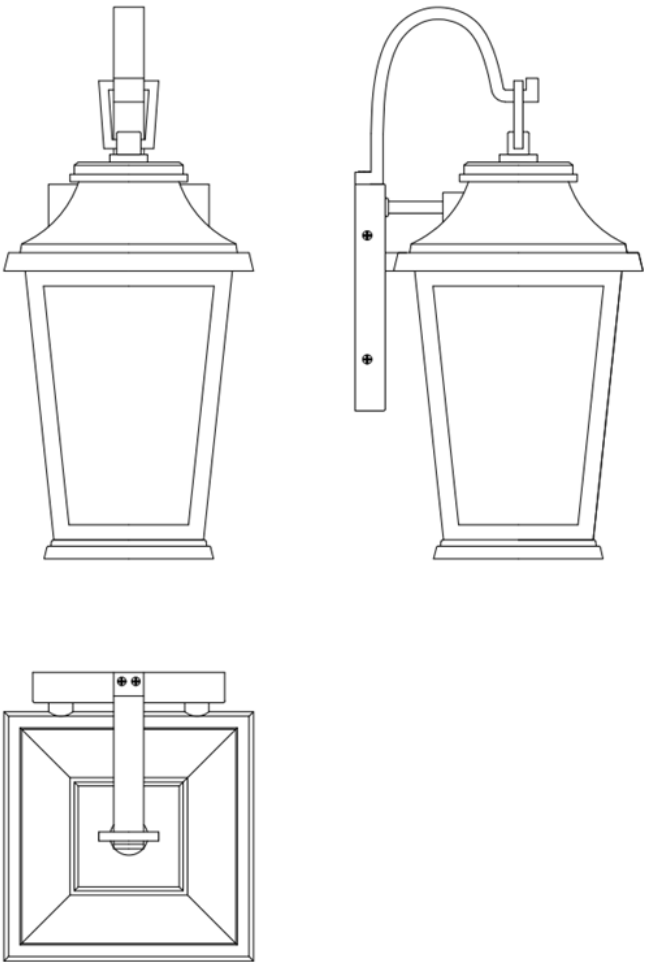

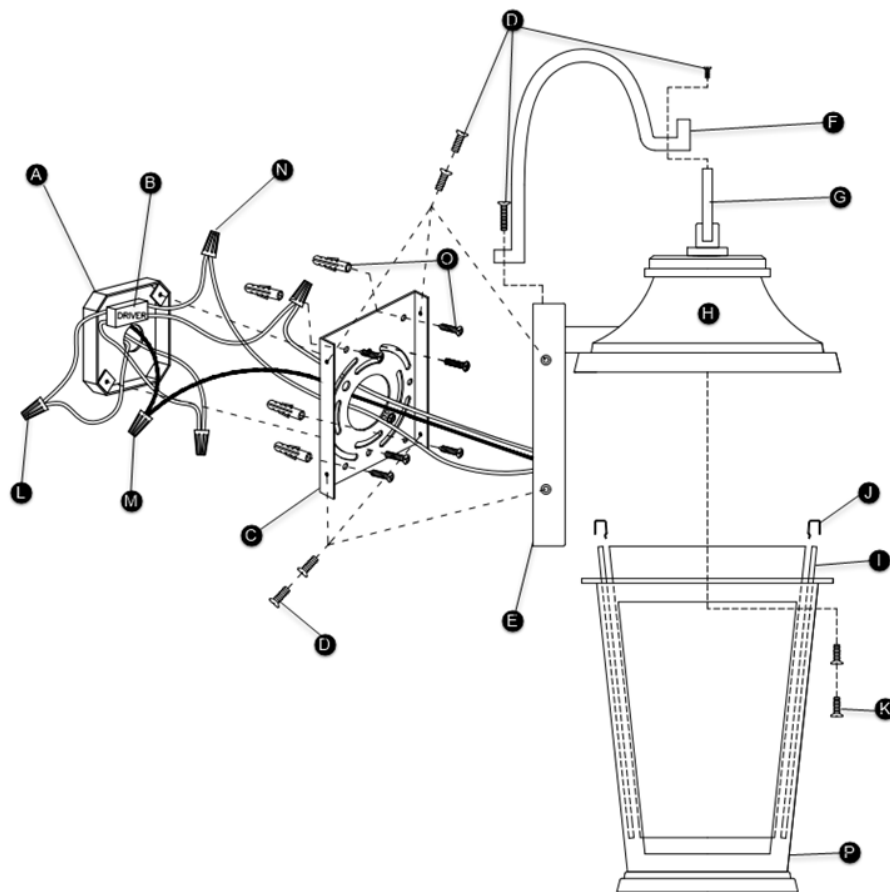

## FIXTURE PARTS

- A. Junction box
- B. Driver
- C. Mounting Plate
- D. Fixture Screws
- E. Fixture Base
- F. Fixture Arm
- G. Fixture Loop
- H. Top Cover
- I. Glass Panel
- J. Glass Clip
- K. Cover Screw
- L. Driver Wires
- M. Ground Wires
- N. Fixture Wires
- O. Mounting Screws and Anchors
- P. Lower Cover

## INSTRUCTIONS

### I. Preparing the Fixture

1. Temporarily install the mounting plate to the junction box and mark the anchor hole locations through the mounting plate holes. Remove the mounting plate.
2. Drill appropriately sized holes at the marked locations and install the anchors.
3. Place driver into the junction box. Connect the negative input driver wire to the neutral power line wire with a wire nut. Connect the positive input driver wire to the hot power line wire with a wire nut.
4. Secure the mounting plate to the junction box. Make sure the output driver wires are accessible.
5. Screw the anchor screws into the anchors.
6. Attach the fixture arm to the fixture base and fixture loop with the provided screws.
7. Slide glass panels into the lower cover and secure each panel with clips.

### II. Wiring the Fixture

8. Connect the fixture to a suitable ground in accordance with local electrical codes.
9. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Negative (-) fixture wire to the negative (-) output driver wire --negative to negative.
  - b) Positive (+) fixture wire to the positive (+) output driver wire --positive to positive.

### III. Preparing the Fixture

10. Neatly place the wire connections into the junction box.
11. Mount the fixture base onto the mounting plate and secure it with the fixture screws.
12. Install the lower cover to the top cover by using the cover screws.
13. For wet locations, caulk around the base of the fixture with waterproof construction sealant.