

INSTALLATION INSTRUCTION

277V 96W Electronic Transformer

EN-24100-277-RB2-T

WAC LIGHTING

Responsible Lighting®

CAUTION – TO REDUCE RISK OF FIRE AND ELECTRICAL SHOCK

- Read all instructions before installing.
- System is intended for installation by a qualified electrician in accordance with the National Electrical Code and local regulations.
- Go to the main fuse box, or circuit breaker. Place the main power switch in the "OFF" position and unscrew the fuse(s) or switch "OFF" the circuit breaker switch(es) that control the power to the fixture or room that you are working on.
- Place the wall switch in the "OFF" position.


AVERTISSEMENT:

IMPORTANT : COUPEZ L'ÉLECTRICITÉ AVANT TOUTE MANIPULATION.

- Lisez toutes les instructions avant d'installer.
- Système est destiné à être installé par un électricien qualifié en conformité avec le code national de l'électricité et les règlements locaux.
- Accédez au panneau central de disjoncteurs ou de fusibles de votre demeure et placez l'interrupteur principal en position d'arrêt (« OFF »).
- Placez l'interrupteur mural en position d'arrêt (« OFF »).

MAX LOAD	96W
MIN LOAD	1W
INPUT VOLTAGE	120-240VAC 1.4A 50/60Hz
	277VAC 0.45A 50/60Hz
OUTPUT VOLTAGE	24.0VDC 4AMAX
AMBIENT TEMP	-20°C TO 50°C (-4°F TO 122°F)

PRODUCT DIMENSIONS:

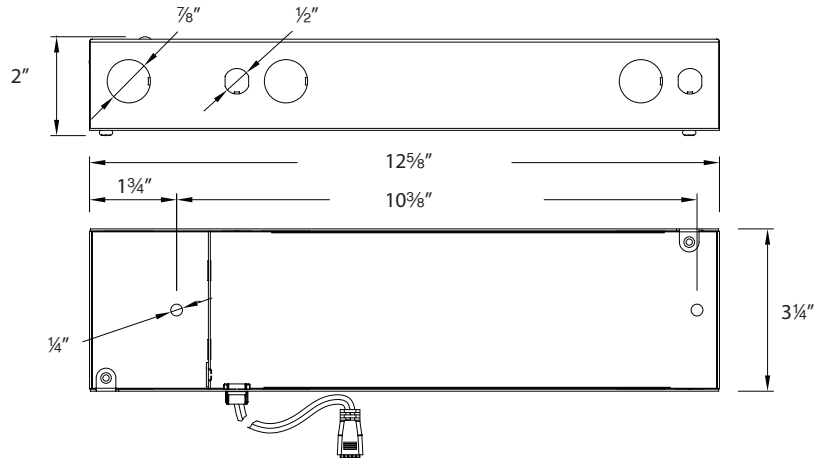

HARDWARE:

A1



Wire Connector
Qty: 5pcs

B1




Cover Screw
Qty: 2pcs

D1



Mounting Screw
Qty: 2pcs

E1



24V Tape Light
6ft Output Wire
Qty: 1pc

F1



24V Straight Edge
Line 6ft Output Wire
Qty: 1extra

WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050


Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center

1750 Archibald Ave • Ontario, CA 91761

Phone (800) 526.2588 • Fax (800) 526.2585

Fig. 1

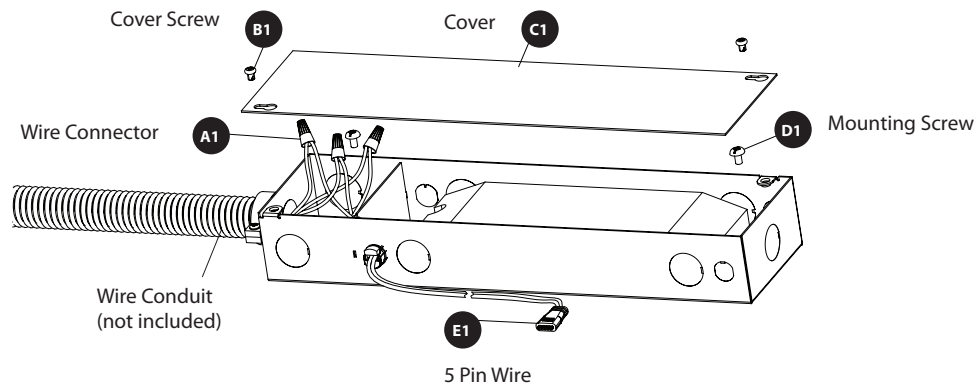

FEATURES:

- Electronic short circuit, over current, over voltage, over temperature protection with auto-reset.
- Class 2, UL listed
- Suitable for damp locations

PREPARATION:

- Shut off the power at the circuit breaker.
- Carefully unpack your new fixture and lay out all the parts on a clear area. Be careful not to lose any small parts necessary for installation.
- Transformer is to be installed away from heat sources and accessible for service.

INSTALLATION: (FIG.1)

1. Loosen two cover screws (B1) and remove the cover (C1).
2. Identify which fixture is to be used with transformer. For invisILED tapelight (LED-T24, LED-TX24), use with preinstalled 5 pin wire (E1).
 - For button light (HR-LED87, HR-LED90), cut off 5 pin plug end of the preinstalled wire (E1) for splicing leads to button lights.
 - For Straight Edge (LS-LED) and Line (LN-LED), replace 5 pin wire (E1) with Straight Edge / Line wire provided (F1).
3. Secure transformer to suitable mounting surface using mounting screws (D1).

CONNECT THE WIRES: (FIG.2)

4. Remove appropriate power feed knockout in transformer box.
5. Bring building wires into knockout using cable connector.
6. Connect the electrical wires as shown in **Fig. 2**, making sure that all wire connectors (A1) are secured.
7. Secure the cover (C1) by tightening the two screws (B1).
8. Connect compatible fixture(s) to output wires of transformer following fixture instructions.

Fig. 2

