

R2FBNT, R2FRNL, R2FSNL, R2FBFT

2" FQ New Construction Housing and Frame-in Kit

WAC LIGHTING

SPECIFICATIONS

Input	Universal 120-277V AC 50/60 Hz
Standards:	ETL & cETL, IC-rated, Airtight (see below for list)
Dimming:	Electronic Low Voltage (ELV): 100%-1% Triac: 100%-1% 0-10V: 100%-1%
Emergency:	EM fixtures provided with integral Emergency battery back up with 24" lead wire remote test switch. Provides at least 90 minutes of 6W illumination during emergency operation.
Mounting:	New construction housings included with universal mounting brackets and hanger bars Ceiling cutout (Round and Square): Ø 3 1/2" Ceiling thickness: 1/2" - 1"
Construction:	20 Gauge galvanized sheet
Warranty:	5 year WAC Lighting product warranty


Fixture Type:

Catalog Number:


Project:

Location:


New Construction Trimmed



New Construction Trimless

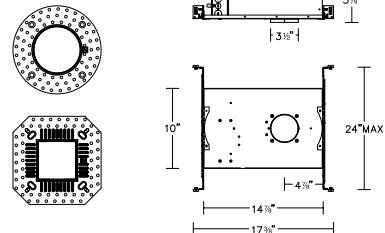

New Construction Frame-In Trimmed



HOUSINGS

Model

Power

Rating

Emergency Backup

Compatible Trims

New Construction Trimmed	R2FBNT Round and Square	Airtight	1 15W 2 21W 3 25W	IC IC Non-IC	EM Emergency backup battery (Optional)	R2FRDT, R2FSDT R2FRAT, R2FSAT R2FRWT, R2FSWT
New Construction Trimless	R2FRNL Round (Spackle frame included)	Airtight	1 15W 2 21W	IC IC	N/A	R2FRDL, R2FRAL, R2FRWL
	R2FSNL Square (Spackle frame included)	Airtight	3 25W	Non-IC	N/A	R2FSDL, R2FSAL, R2FSWL
New Construction Frame-in Trimmed	R2FBFT Round and Square		1 15W 2 21W 3 25W	Non-IC Non-IC Non-IC	EM Emergency backup battery (Optional)	R2FRDT, R2FSDT R2FRAT, R2FSAT R2FRWT, R2FSWT

R2F ____ - ____

Example: **R2FBNT-1** or **R2FBNT-1-EM** (with Emergency backup battery)

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

R2FBNT, R2FRNL, R2FSNL, R2FBFT

2" FQ New Construction Housing and Frame-in Kit

WAC LIGHTING

REPLACEMENT DRIVER

Housing Model Power Emergency Backup Replacement Driver Model

Housing Model	Power	Emergency Backup	Replacement Driver Model
R2FBNT, R2FRNL, R2FSNL	1 2 3 15W 21W 25W	<i>None</i>	D-R2FN-1 D-R2FN-2 D-R2FN-3
R2FBFT	1 2 3 15W 21W 25W	<i>None</i>	D-R2FF-1 D-R2FF-2 D-R2FF-3
R2FBNT, R2FBFT	1 2 3 15W 21W 25W	<i>EM</i>	D-R2FN-1-EM D-R2FN-2-EM D-R2FN-3-EM

Example:

For **R2FRNL-2** housing, choose replacement driver model **D-R2FN-2**

For **R2FBNT-3-EM** housing, choose replacement driver model **D-R2FN-3-EM**

waclighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive

Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct

Lithia Springs, GA 30122

Western Distribution Center

1750 Archibald Avenue

Ontario, CA 91760