

R4FBNT, R4FRNL, R4FSNL, R4FBFT, R4FRFL, R4FSFL

4" FQ New Construction Housing and Frame-in Kit

WAC LIGHTING

SPECIFICATIONS

Input: Universal 120-277V AC 50/60 Hz

Standards: ETL & cETL, IC-rated, Airtight (see below for list)

Dimming: Electronic Low Voltage (ELV): 100%-1%
Triac: 100%-1% 0-10V: 100-1%

Emergency: EM fixtures provided with integral Emergency battery back up with 24" lead wire remote test switch. Provides at least 90 minutes of 6W illumination during emergency operation.

Mounting: New construction housings included with universal mounting brackets and hanger bars
Ceiling cutout (Round and Square): Ø 4 3/4"
Ceiling thickness: 1/2" - 1"

Construction: 20 Gauge galvanized sheet


Warranty: 5 year WAC Lighting product warranty

Fixture Type:

Catalog Number:

Project: _____

Location: _____

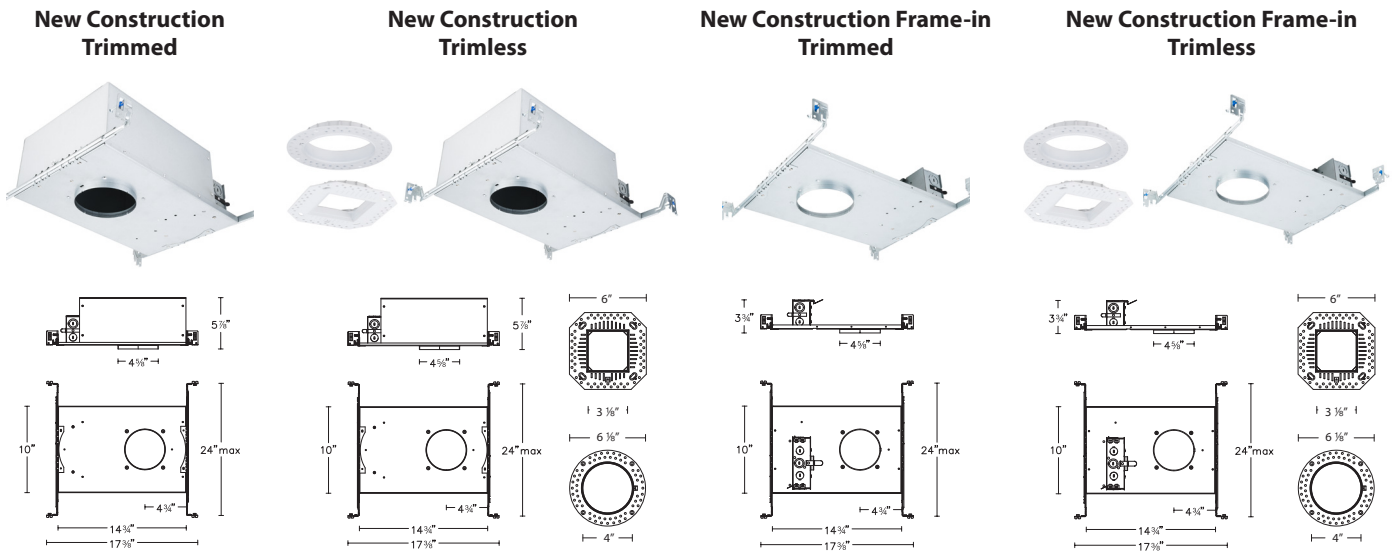

HOUSINGS	Model		Power	Rating	Emergency Backup	Compatible Trims
New Construction Trimmed	R4FBNT Round and Square	Airtight	1 13W 2 19W 3 25W 4 28W	IC IC IC Non-IC	EM Emergency backup battery (Optional)	R4FRDT, R4FSDT R4FRAT, R4FSAT R4FRWT, R4FSWT
New Construction Trimless	R4FRNL Round (Spackle frame included)	Airtight	1 13W 2 19W 3 25W 4 28W	IC IC IC Non-IC	N/A	R4FRDL, R4FRAL, R4FRWL
	R4FSNL Square (Spackle frame included)	Airtight				R4FSDL, R4FSAL, R4FSWL
New Construction Frame-in Trimmed	R4FBFT Round and Square		1 13W 2 19W 3 25W 4 28W	Non-IC	EM Emergency backup battery (Optional)	R4FRDT, R4FSDT R4FRAT, R4FSAT R4FRWT, R4FSWT
New Construction Frame-in Trimless	R4FRFL Round (Spackle frame included)		1 13W 2 19W 3 25W 4 28W	Non-IC	N/A	R4FRDL, R4FRAL, R4FRWL
	R4FSFL Square (Spackle frame included)					R4FSDL, R4FSAL, R4FSWL

R4F _ _ _

Example: **R4FBNT-1** or **R4FBNT-1-EM** (with Emergency backup battery)

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

**R4FBNT, R4FRNL, R4FSNL, R4FBFT,
R4FRFL, R4FSFL**
4" FQ New Construction Housing and Frame-in Kit

WAC LIGHTING

REPLACEMENT DRIVER

<i>Housing Model</i>	<i>Power</i>		<i>Emergency Backup</i>	<i>Replacement Driver Model</i>
R4FBNT, R4FRNL, R4FSNL	1	13W	<i>None</i>	D-R4FN-1
	2	19W		D-R4FN-2
	3	25W		D-R4FN-3
	4	28W		D-R4FN-4
R4FBFT, R4FRFL, R4FSFL	1	13W	<i>None</i>	D-R4FF-1
	2	19W		D-R4FF-2
	3	25W		D-R4FF-3
	4	28W		D-R4FF-4
R4FBNT, R4FBFT	1	13W	<i>EM</i>	D-R4FN-1-EM
	2	19W		D-R4FN-2-EM
	3	25W		D-RBFN-3-EM
	4	28W		D-R4FN-4-EM

Example:

For **R4FRNL-2** housing, choose replacement driver model **D-R4FN-2**

For **R4FBNT-3-EM** housing, choose replacement driver model **D-RBFN-3-EM**

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760