

EL1499

4" Low Voltage Housing with Thermal Protector.
Complete with 12 Volt Thermally Protected
Magnetic Transformer.



PROJECT INFORMATION:

Project Name: _____

Fixture Type: _____

Date: _____

DIMENSIONS

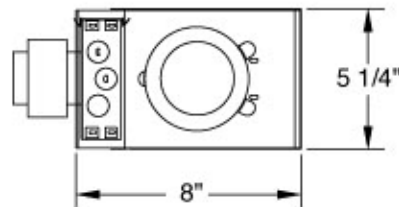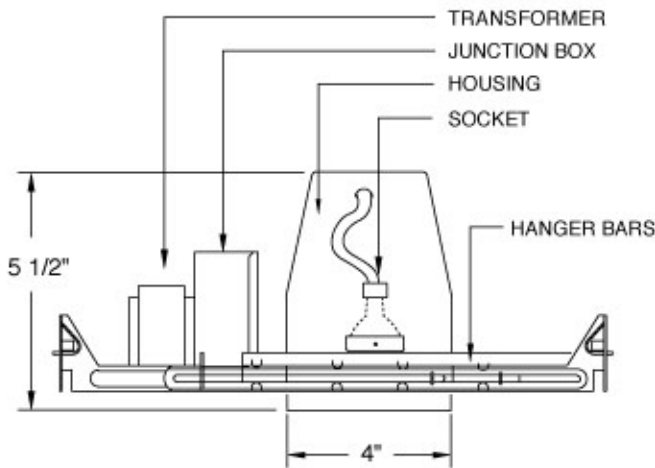

PRODUCT SPECIFICATIONS

Housing Features: Integral thermal protector guards against improper lamping. Single wall construction.

Lamp: 12V, 50W Maximum; MR16

Lamp Holder: MR16 socket.

Trim Ring: Polycarbonate trim ring, metal trim ring, designed to conceal ceiling cut-out.

INSTALLATION

Junction Box: Pre-wired junction box provided with 1/2", 3/4" and 4 Romex Cable knockouts with retaining clips for easy installation. U.L. listed/C.U.L. listed: for through branch wiring, maximum (8) No. 12 AWG branch circuit conductors (4 in, 4 out). Junction box provided with removable access plates.

Mounting: Hanger bars span 24" joists can be repositioned 90 degrees. Housing accommodates various ceiling thickness.

Mounting Frame: Stamped steel material and painted for corrosion resistance.

Labels:

- U.L. listed for damp locations.
- U.L. listed for feed through.

CATALOG NUMBER

Example: EL1499 - EL1421C

See trim page for variety of trims available

2042 East Vernon Avenue, Vernon, CA 90058 • Tel: (323) 231-2600 Fax: (323) 231-3200 • www.elcolighting.com

© ELCO LIGHTING 2005 All Rights Reserved. Rev. Dec. 2005. ELCO Lighting reserves the right to make specification and design changes without notice. LIGHTING

ELCO LIGHTING