
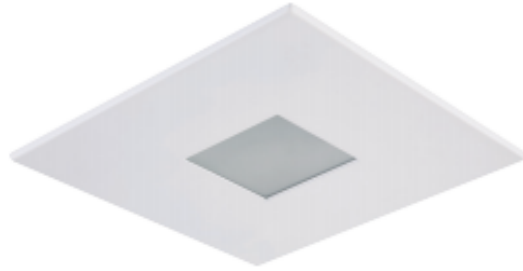


R4-559MW


4" SQUARE APERTURE SHOWER TRIM

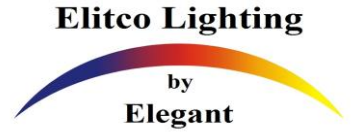

Project

Location

53mm[2 1/8"]



PRODUCT DESCRIPTION

4" square aperture shower trim (DAMP Location).

To be used in low and line voltage applications.


LAMPING: Accommodates an MR-16 or GU-10 bulb. Please see housing for maximum wattage allowed according to selection.

Painted finishes powder coated for abrasion resistance, frosted lenses included. Steel metal clips secure to housing.

DIAMETER: 5"

FINISHES: Matte White(MW)

127mm[5"]

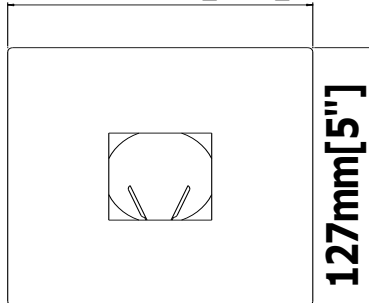

COMPATIBLE HOUSINGS

| Model | Description |
|-----------------|---|
| R4-050 | 4" LOW VOLTAGE NONIC REMODELING HOUSING FOR REMOTE TRANSFORMER(NOT SUPPLIED)50W MAX |
| R4-19AT | 4" LINE VOLTAGE NEW CONSTRUCTION NONIC AIRTIGHT HOUSING |
| R4-19RAT | 4" LINE VOLTAGE REMODEL NONIC AIRTIGHT HOUSING |
| R4-499AT | 4" LOW VOLTAGE NONIC AIRTITE NEW CONSTRUCTION HOUSING 50W MAX MR-16 |
| R4-499ICAT | 4" LOW VOLTAGE IC AIRTITE NEW CONSTRUCTION HOUSING 35W MAX MR-16 |
| R4-499RAT | 4" LOW VOLTAGE NONIC AIRTITE REMODEL HOUSING 50W MAX MR-16 |
| R4-499SAT | 4" LOW VOLTAGE NONIC AIRTITE NEW CONSTRUCTION HOUSING 50W MAX MR-16 |
| R4-499SRAT | 4" LOW VOLTAGE NONIC AIRTITE REMODEL HOUSING 50W MAX MR-16 |
| R4-G19AT | 4" LINE VOLTAGE NONIC AIRTITE NEW CONSTRUCTION HOUSING 50W MAX GU-10 |
| R4-G19ICAT | 4" LINE VOLTAGE IC AIRTITE NEW CONSTRUCTION HOUSING 35W MAX GU-10 |
| R4-G19RAT | 4" LINE VOLTAGE NONIC AIRTITEREMODEL HOUSING 50W MAX GU-10 |
| R4-G19ICAT-LED | 4" LINE VOLTAGE IC AIRTITELED NEW CONSTRUCTION HOUSING 8W MAX LED GU-10 |
| R4-G19ICRAT-LED | 4" LINE VOLTAGE IC AIRTITELED REMODEL HOUSING 8W MAX LED GU-10 |
| R4-19ICAT | 4" LINE VOLTAGE NEW CONSTRUCTION IC AIRTIGHT HOUSING |