

R41330KRF

4" LED RETORFIT BAFFLE TRIM



SOURCE : AC LED 13 Watts

PRODUCT DESCRIPTION

The R41327KRF Series LED fixture is designed to suitable for use with 4" recessed housing. The R41327KRF produces even illumination without diode image. The low profile dimmable unit is ETL wet listed and produces 830 lumens at 90+ CRI.

FEATURES & SPECIFICATIONS

- Lumen output : 830LM
 - High color rendition: 90+ CRI
 - Accommodates 120 volts AC at 60Hz
 - 3000K
 - NO LED DRIVER
 - Dimmable
- Recessed mount into 4"housing. Includes medium base socket adaptor for easy retrofitting in 4" recessed housings.

RATINGS:

IC rated when used with 4" recessed housings rated for direct contact with insulation.

ELECTRICAL


Voltage: 120VAC
 Current: 100mA
 Power Consumption: 13W
 Light Source: SEOUL SEMI
 Lumens: 830lm
 CRI: 90 CRI
 Life Expectancy: 50,000 hours
 Power Factor : 98%

TYPE :

CATALOG # :

PROJECT :

DATE :

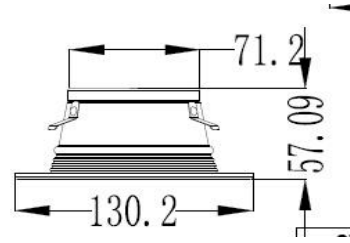

Title 24 compliant

LABELS & LISTINGS

- Title 24 Compliant
- ETL Listed for Wet Location
- WSEC ASTM E283 for Air-Tight
- Energy Star Rated
- RoHS Compliant
- 5 Year Limited Warranty
- Conforms to IESNA LM-79 and LM-80

ORDERING INFORMATION

Series	Wattage	Color Temp	Color
R41330KRF	13W	3000K	WHITE