

GENERAL

Highest quality sink formed of #18 (1.2mm) gauge, type 304 (18-8) nickel bearing stainless steel. Undermount.

DESIGN FEATURES

Bowl Depth: 7-7/8" (200mm) (ELUHF3320), 10" (254mm) (ELUHF332010).

Apron Height: 8" (203mm)

Coved Corners: 1-3/4" (44mm) vertical and horizontal radius.

Finish: Exposed surfaces are hand blended to a lustrous satin finish.

Underside: Underside of sink is fully protected by heavy duty Sound Guard[™] undercoating to prevent condensation and dampen sound.

Note: All Elkay undermount sinks are designed to affix to the underside of any solid surface countertop.

OTHER

Drain Opening: 3-1/2" (89mm). Installation: See illustrated profile below. These sinks comply with ASME A112.19.3.


OPTIONAL ACCESSORIES


Bottom Grid: LKWOBG1316SS. Cutting Boards: CB1613, CB1713, CBR1316, CBS1316. Drain: LK99.


Mounting Clip: LKUCLIP8 (2 packages required). Rinsing Baskets: LKWRB1316SS, LKWERBSS. Utensil Caddy for Rinsing Basket: LKWUCSS.

Installation Profile of ELUHF Model

Elkay recommends ELUHF sinks are installed with a 1/2" reveal as shown.





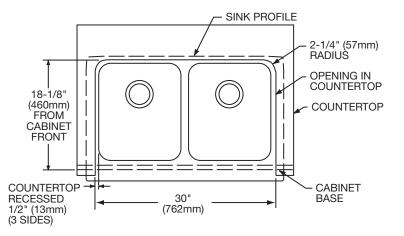

SEE OTHER SIDE FOR PRODUCT DIMENSIONS.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkayusa.com for most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overloaked.

2222 Camden Court Oak Brook, IL 60523



SINK DIMENSIONS*

Model	Overall		Inside Each Bowl			Minimum Cabinet
Number	L	W	L	W	D	Size
ELUHF3320	33	20 ^{1/2}	13 ^{1/2}	16	7 ^{7/8}	36
	(838mm)	(521mm)	(343mm)	(406mm)	(200mm)	(914mm)
ELUHF332010	33	20 ^{1/2}	13 ^{1/2}	16	10	36
	(838mm)	(521mm)	(343mm)	(406mm)	(254mm)	(914mm)

*Length is left to right. Width is front to back.

