


Art Nouveau
Part# UL 3532



Outside Trim

Inside Trim

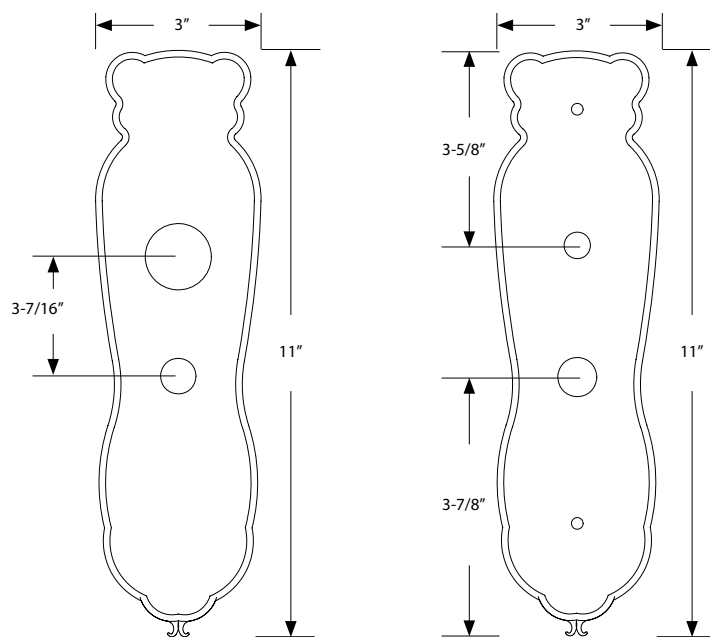

Door Thickness Specifications

<p>Standard Door Thickness: 1-3/4"</p> <p>Standard Components:</p> <ul style="list-style-type: none"> • 1-3/8" Threaded Cylinder • 2" Long Spindle • 2" Top Rosette Screw • 1-1/2" Bottom Rosette Screw • Thumbpress • Strikeplate 	<p>Extended Door Thickness: 1-7/8" - 2-1/4"</p> <p>Extended Components:</p> <ul style="list-style-type: none"> • 1-1/2" Threaded Cylinder • 2" Long Spindle • 2-1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Thumbpress • Strikeplate 	<p>Extended Door Thickness: 2-3/8" - 2-5/8"</p> <p>Extended Components:</p> <ul style="list-style-type: none"> • 1-3/4" Threaded Cylinder • 2-1/4" Long Spindle • 2-1/2" Top Rosette Screw • 2" Bottom Rosette Screw • Extended Thumbpress • Extended Strikeplate • 2-3/4" TD Requires 2" Threaded Cylinder
---	--	--