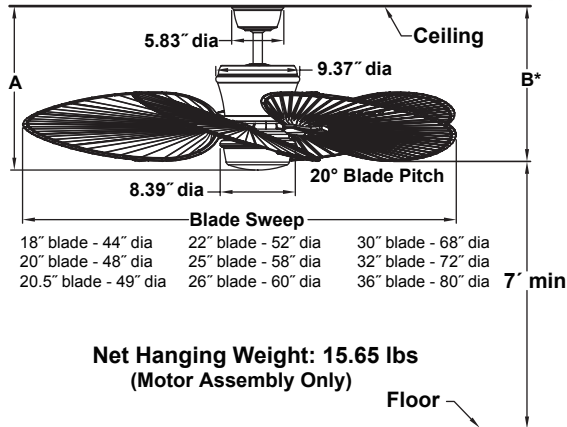


**SANDELLA®****MAD3260\*\*  
Ceiling Fan**

\*Dimension when used with ISP1 blades. Ceiling to blade measurement will vary depending on blade.

**INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

**ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

DC-125S DC motor is designed for optimal performance with this fan.

**BLADES:**

5 bladed blade sets are available in palm, bamboo, wood and composite materials—all sold separately. See our catalog or visit [www.fanimation.com](http://www.fanimation.com) for blade options.

*Note: Fan speeds will vary according to blade set—material, shape and size of blade. In general, smaller blades will turn faster than bigger ones and narrower blades will turn faster than wider ones.*

**CONTROL OPTIONS:**

TR31 hand-held DC fan remote control is included. Push button remote control has 6 fan speeds, reverse, off button and infinitely-varying uplight and downlight controls. Optional TW32 wall control is available—sold separately. Instructions are provided with each control.

**LIGHTING OPTIONS:**

Uplight kit with two 35-watt halogen minican bulbs and downlight kit with one 100-watt halogen minican bulb are included. See our catalog or visit [www.fanimation.com](http://www.fanimation.com) for available lighting options.

**DOWNROD OPTIONS:**

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". The Sandella® fan can be mounted on a sloped ceiling up to 30°. Optional sloped ceiling ball kits (SCB1-52) are available for up to 52°. Call technical support for more information.

**LOCATION USE:**

MAD3260AB and MAD3260BA are rated for dry locations only. MAD3260OB, MAD3260RS and MAD3260SN are rated for dry and damp locations. Damp location rated with use of woven bamboo or all-weather composite blades.

Available Finishes	
AB	Antique Brass
BA	Bronze Accent
OB	Oil-rubbed bronze ( <b>Damp</b> )
RS	Rust ( <b>Damp</b> )
SN	Satin Nickel ( <b>Damp</b> )

	A	B*
Fan w/6" downrod	18.30"	17.34"
Fan w/12" downrod	24.30"	23.34"
Fan w/18" downrod	30.30"	29.34"
Fan w/24" downrod	36.30"	35.34"
Fan w/36" downrod	48.30"	47.34"
Fan w/48" downrod	60.30"	59.34"
Fan w/60" downrod	72.30"	71.34"
Fan w/72" downrod	84.30"	83.34"

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
I	50	2477	550	0.07	4.5
II	66	3014	486	0.09	6.2
III	79	3601	357	0.13	10.1
IV	93	4262	286	0.19	14.9
V	109	4941	233	0.26	21.2
VI	121	5412	183	0.36	29.6