


XENO™

FP6728** Ceiling Fan

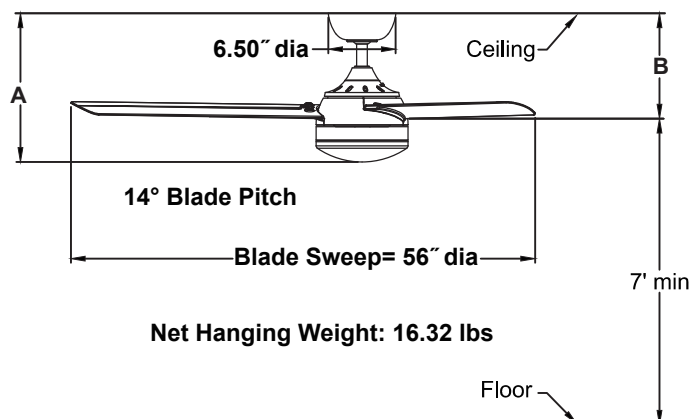

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

188 x 25 motor is designed for optimal performance with this fan.

BLADES:

A set of three 25" composite blades is included.

LIGHTING OPTIONS:

One 18-watt LED included.

CONTROL OPTIONS:

BTT9 bluetooth hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels and off button.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations.

	A	B
Fan w/4.5" downrod	14.33"	10.20"
Fan w/12" downrod	27.21"	18.88"
Fan w/18" downrod	33.21"	24.88"
Fan w/24" downrod	39.21"	30.88"
Fan w/36" downrod	51.21"	42.88"
Fan w/48" downrod	63.21"	54.88"
Fan w/60" downrod	75.21"	66.88"
Fan w/72" downrod	87.21"	78.88"

Available Finish

BN	Brushed Nickel with Brushed Nickel Blade
DZ	Dark Bronze with Dark Walnut Blade

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	175	7236	110	0.56	66
Med	123	4835	147	0.39	33
Low	68	2774	218	0.24	13

Light Bulb Information (120V)

Bulb Type	Watts	Lumens Amount	Color Temp	CRI
LED	18	1350	3000	80%