


CELANO™

FP5420
Ceiling Fan**



Optional Cherry Blade Set

B5400CY

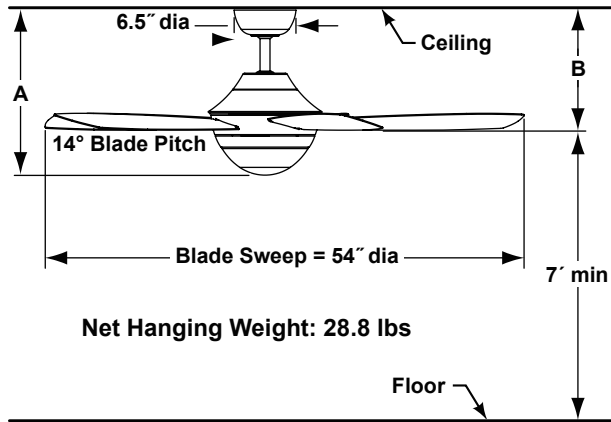

Optional DR Sleeve

DRS54MW
DRS54OB
DRS54PN
DRS54PW

	A	B
Fan w/6" downrod	18.00"	11.60"
Fan w/12" downrod	24.00"	17.60"
Fan w/18" downrod	30.00"	23.60"
Fan w/24" downrod	36.00"	29.60"
Fan w/36" downrod	48.00"	41.60"
Fan w/48" downrod	60.00"	53.60"
Fan w/60" downrod	72.00"	65.60"
Fan w/72" downrod	84.00"	77.60"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

188 x 20 motor is designed for optimal performance with this fan.

BLADES:

A set of five 21.3" wood blades is included—matte white with matte white finish, walnut with OB and PW finishes and cherry with PN finish. Optional set of five cherry wood blades (B5400CY) is available for OB and PW fans—sold separately.

CONTROL OPTIONS:

TR24WH hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels and off button. Optional CWRL4 and C25 wall controls, CRL4WH and CRL8TS hand-held remote controls are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

One bulb (100-watt halogen minican bulb -included) downlight fixture is included with this fan assembly. Maximum downlight wattage not to exceed 100 watts.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Optional Decorative DR Sleeve (DRS54**) is available, requires an 18" or longer downrod. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Optional close-to-ceiling kit is available as well—sold separately. Call your local dealer for more information.

LOCATION USE:

Fan is rated for dry locations only.

Available Finish	
MW	Matte White fan with opal frosted glass
OB	Oil-Rubbed Bronze fan with opal frosted glass
PN	Polished Nickel fan with opal frosted glass
PW	Pewter fan with opal frosted glass

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	149	5882	74	0.66	79
Med	81	3108	111	0.46	28
Low	45	1351	117	0.32	12