


THE SANDELLA™

FP1820 Series

SANDELLA™ Fan
shown with
Wood Blade Holders



SANDELLA™ Fan
shown with
Traditional Blade Holders

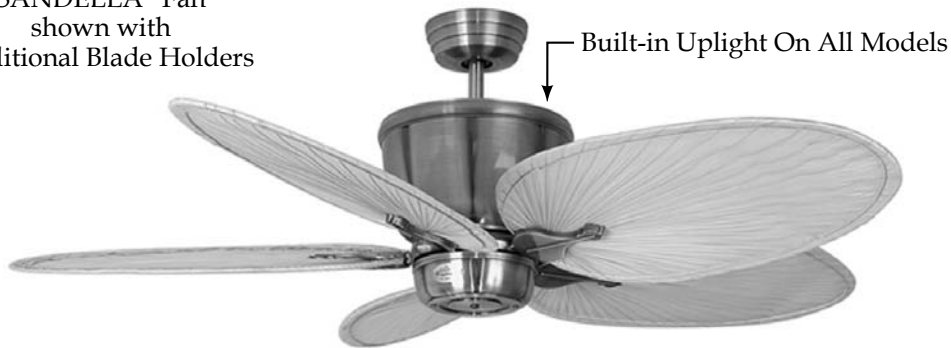

SPECIFICATION SHEET



INSTALLATION REQUIREMENTS


Ceiling fan is secured to a structural member such as a ceiling joist and must be capable of withstanding a load of at least 50 pounds. A lag bolt passes through the junction box and into the wood member above.

ELECTRICAL REQUIREMENTS

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit. 220 VAC, 50 Hz export version available.

Specifications subject to change

The Sandella™ Fan Assembly

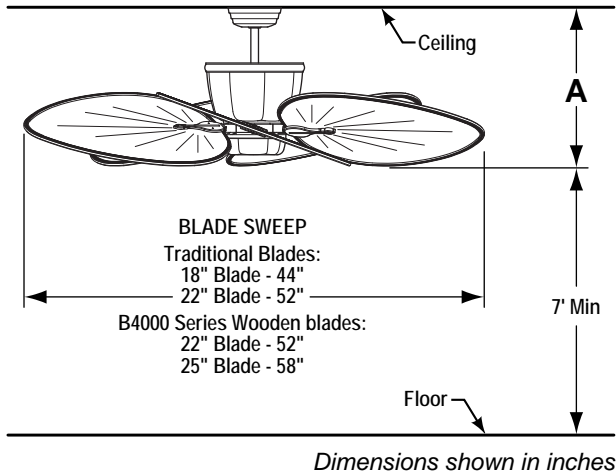

Fan Assembly	A
Fan w/6" down rod	17"
Fan w/12" down rod	23"
Fan w/18" down rod	29"
Fan w/24" down rod	35"
Fan w/36" down rod	47"
Fan w/48" down rod	59"
Fan w/60" down rod	71"
Fan w/72" down rod	83"

Available Finishes	
AB	Antique Brass
AC	Antique Copper
BL	Black (Damp)
MC	Marbled Cream (Damp)
MW	Matte White (Damp)
PW	Pewter
RS	Rust (Damp)
SN	Satin Nickel

MOTOR:

120 Volts, 60 Hz, 0.90 amps. 220 VAC, 50 Hz export version is available. **Fan speeds:** will vary according to the blade set. Material, shape, and size of fan blade will affect the speed of the fan. In general, the larger blades (22") will turn slower than the smaller blades (18") and the narrower blades (narrow oval & oar shaped) will turn faster than the wide blades (wide oval).

CONTROL OPTIONS:

The hand-held remote control (C22), wall control (C23, includes white faceplate) and receiver are all included. Pushbutton control with frequency code settings located on both the transmitter and the receiver units. Each push button unit will consist of 3 separate speeds, reverse, up/down light controls, and off button. Installation and operating instructions provided with each control.

LIGHTING OPTIONS:

The 3-bulb (candelabra) uplight is included with this fan assembly, with a maximum of 120 watts. See Catalog or visit our website, www.fanimation.com for more lighting options.

DOWN ROD OPTIONS:

The Sandella™ fan comes with a standard 6" down rod. Optional down rods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer down rod, down rod couplers are available. The Sandella™ fan can be mounted on a sloped ceiling up to 30°. Optional sloped ceiling kits are available for up to 52°.

BLADE SETS:

Traditional blade holder mounting set (included) consist of 5 blade holders.

Wooden blade holder mounting set (included) consist of 4 blade holders. See Catalog or visit our website, www.fanimation.com for more blade selections.



10983 Bennett Parkway
 Zionsville, IN 46077
 (888) 567-2055
 FAX (866) 482-5215

Outside U.S. call (317) 733-4113

Visit Our Website www.fanimation.com