


# **The Involution™**

**FP4520 Series**



## **SPECIFICATION SHEET**


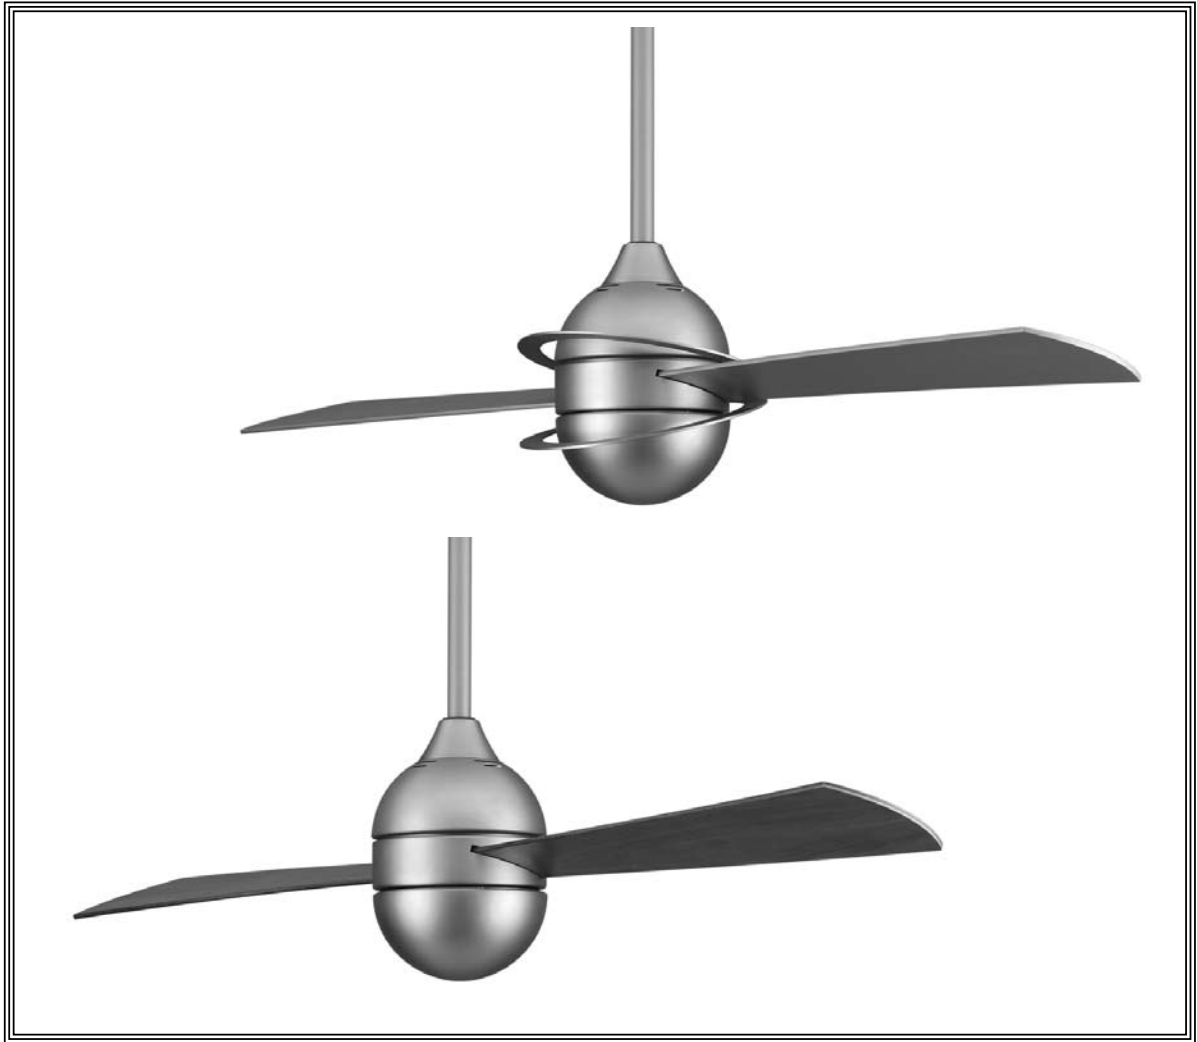


celebrating 25 years

*Product Specifications Subject To Change*

**INVOLUTION™**

**FP4520\*\*  
Ceiling Fan**

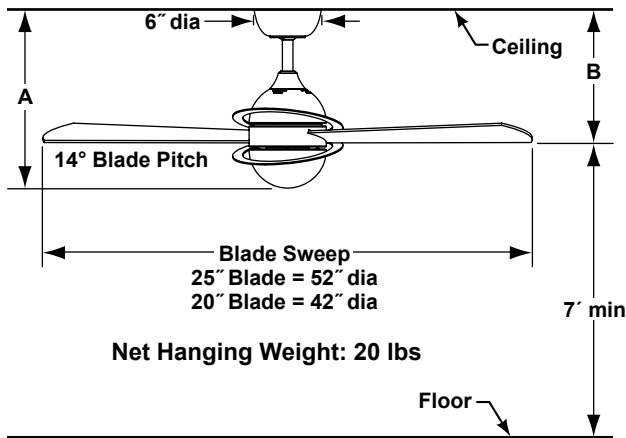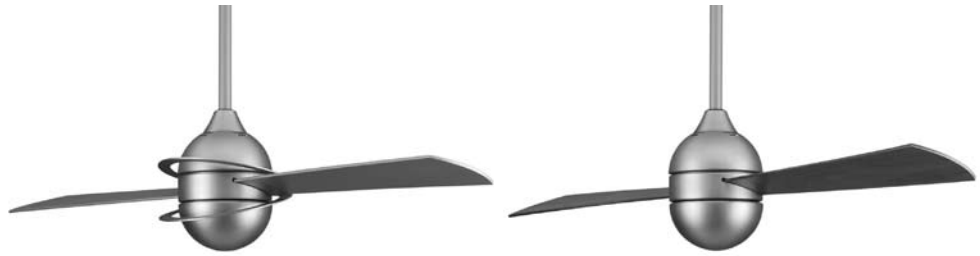

**INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

**ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

153 x 18 motor is designed for optimal performance with this fan. 220 VAC, 50 Hz export version available.

**BLADES:**

A set of two 25" reversible cherry/walnut wood blades is included. Optional sets of two 20" wood blades are available in reversible cherry/walnut (B4542CWR) and satin nickel (B4542SN) finishes—sold separately. Optional sets of two 20" composite blades are available in cherry (BPW4542CY) and walnut (BPW4542WA) finishes—sold separately.

**CONTROL OPTIONS:**

CW40 4-speed, fan-only, wall control is included. Reversing switch located inside lower fan housing. Optional C1 and C2 wall controls and C4FL remote control with receiver unit are available—sold separately. Instructions are provided with each control.

**LIGHTING OPTION – LK4520\*\*:**

A single-bulb downlight fixture with 13-watt, energy-efficient, CFL bulb included is available—sold separately. Maximum downlight wattage not to exceed 13 watts. **NOTE:** Fan is supplied with fan-only wall control; light kit will require the use of a C2 or C5 wall control or C4FL remote control—sold separately.

**DOWNROD OPTIONS:**

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Call technical support for more information.

**LOCATION USE:**

Fan is rated for dry locations only. Damp location rated if used with all-weather composite blades listed above.

|                   | A      | B      |
|-------------------|--------|--------|
| Fan w/6" downrod  | 17.00" | 13.00" |
| Fan w/12" downrod | 23.00" | 19.00" |
| Fan w/18" downrod | 29.00" | 25.00" |
| Fan w/24" downrod | 35.00" | 31.00" |
| Fan w/36" downrod | 47.00" | 43.00" |
| Fan w/48" downrod | 59.00" | 55.00" |
| Fan w/60" downrod | 71.00" | 67.00" |
| Fan w/72" downrod | 83.00" | 79.00" |



| Available Finish |                   |
|------------------|-------------------|
| OB               | Oil-rubbed bronze |
| SN               | Satin nickel      |

| Airflow / Energy Efficiency Info (120V) |         |      |             |      |       |
|---|---------|------|-------------|------|-------|
| Fan Speed                               | Max RPM | CFM  | CFM / Watts | Amps | Watts |
| High                                    | 159     | 4207 | 86          | 0.41 | 49    |
| H-Med                                   | 127     | 3291 | 98          | 0.34 | 34    |
| L-Med                                   | 98      | 2440 | 111         | 0.27 | 22    |
| Low                                     | 59      | 1165 | 130         | 0.17 | 9     |



celebrating 25 years

**10983 Bennett Parkway  
Zionsville, IN 46077**

**Toll Free (888) 567-2055**

**FAX (866) 482-5215**

**Outside U.S. call (317) 733-4113**

**Visit Our Website @ [www.fanimation.com](http://www.fanimation.com)**

*Copyright 2010 Fanimation, Inc.  
All Rights Reserved*



2010/01