




BP230**1

Damp Series Ceiling Fans

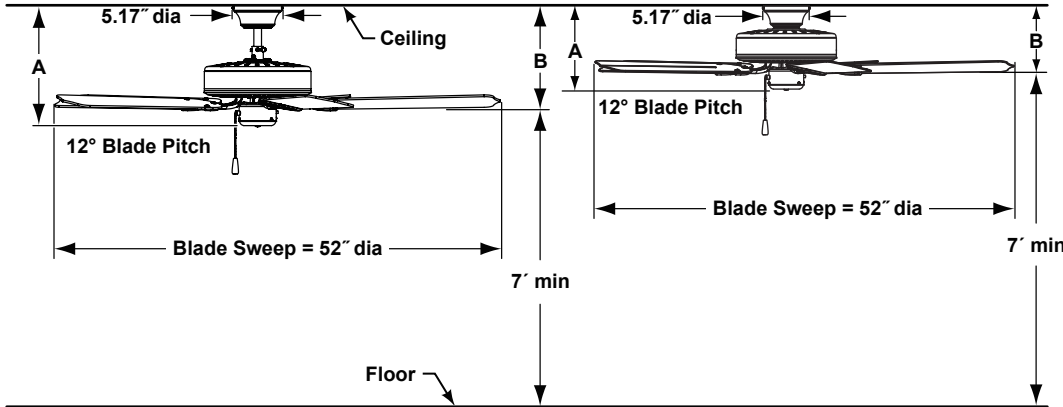

Net Hanging Weight: 16.31 lbs

	A	B
Fan In Close to Ceiling Configuration	9.63"	7.72"

	A	B
Fan w/4.5" downrod	13.20"	11.10"
Fan w/12" downrod	20.70"	18.60"
Fan w/18" downrod	26.70"	24.60"
Fan w/24" downrod	32.70"	30.60"
Fan w/36" downrod	44.70"	42.60"
Fan w/48" downrod	56.70"	54.60"
Fan w/60" downrod	68.70"	66.60"
Fan w/72" downrod	80.70"	78.60"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 15 motor is designed for optimal performance with this fan.

BLADES:

A set of five 20.7" traditional all-weather composite blades is included.

CONTROL OPTIONS:

Optional CW1, CW1SW, CW2, CW5 and CWRL4 wall controls and CRL4WH and CRL8TS remote controls (with receiver units) are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available. See our catalog or visit www.fanimation.com for available lighting options.

DOWNROD OPTIONS:

Dual mount for flush mount application or 1" dia x 4.5" long downrod. Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 19°. Optional sloped ceiling kits (SCK1-52) are available for slope an angles up to 52°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Call technical support for more information.

LOCATION USE:

Fans are rated for dry and damp locations.

Available Finishes

Fan / Housing Assembly	Blades - Traditional
MW – Matte white	Matte white composite blade
OB – Oil-rubbed bronze	Walnut composite blade
SN – Satin nickel	Cherry composite blade

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	169	4471	79	0.44	56
Med	102	3516	152	0.28	23
Low	65	2068	229	0.16	9