



В

78.60"

Watts

56

23

9

86.80"

Amps


0.44

0.28

0.16

# **BP220\*\*1/BP2250B1 Series Ceiling Fans**

Fam In Class to

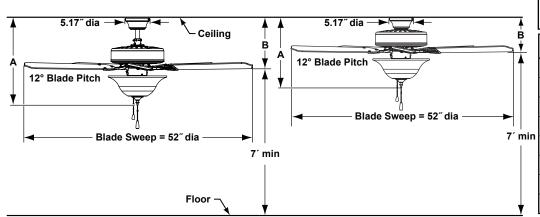

Ceiling Configuration	15.48″	7.74″
	Α	В
Fan w/4.5" downrod	19.30″	11.10″
Fan w/12" downrod	26.80"	18.60″
Fan w/18" downrod	32.80″	24.60"
Fan w/24" downrod	38.80″	30.60″
Fan w/36" downrod	50.80″	42.60"
Fan w/48" downrod	62.80"	54.60"
Fan w/60" downrod	74.80″	66.60″

CFM / Watts

141

170

Net Hanging Weight: 18.5 lbs

## **INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

## **ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

#### **MOTOR SPECS:**

153 x 15 motor is designed for optimal performance with this fan.

### **BLADES:**

A set of five 20.7" traditional wood blades is included.

Available Finishes-BP220**		
Fan Assembly / Glass	Blades - Traditional	
MW – Matte white / Frosted White	Matte white	
OB – Oil-rubbed bronze / Amber	Cherry / walnut reversible	
SN – Satin nickel / Frosted white	Cherry / walnut reversible	

Fan w/72" downrod

Airflow / Energy Efficiency Info (120V)

CFM

4935

3246

1534

Fan Speed | Max RPM

163

104

56

High

Med

Low

Available Finishes-BP2250B		
Fan Assembly / Glass	Blades - Traditional	
OB – Oil-rubbed bronze / Frosted White	Cherry / walnut reversible	

# **CONTROL OPTIONS:**

Optional CW1, CW1SW, CW2, CW5 and CWRL4 wall controls and CRL4WH and CRL8TS remote controls (with receiver units) are available—sold separately. Instructions are provided with each control.

#### **LIGHTING OPTIONS:**

A 3-bulb (60 watt max candelabra bulbs - included) downlight fixture with 1 bowl glass shades is included with this fan assembly. Maximum downlight wattage not to exceed 180 watts.

#### **DOWNROD OPTIONS:**

Dual mount for flush mount application or 1" dia x 4.5" long downrod. Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 19°. Optional sloped ceiling kits (SCK1-52) are available for slope an angles up to 52°. Most sloped ceiling installations require a downrod longer than the standard 6 "downrod. Call technical support for more information.

## **LOCATION USE:**

Fans are rated for dry locations only.