


HUBBARDTON FORGE® SERIES

HF6200** Standard Leaf Fan

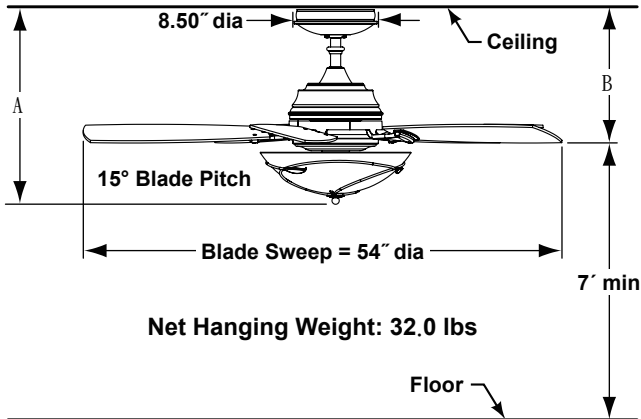

	A	B
Fan w/6" downrod	19.97"	13.68"
Fan w/12" downrod	25.97"	19.68"
Fan w/18" downrod	31.97"	25.68"
Fan w/24" downrod	37.97"	31.68"
Fan w/36" downrod	49.97"	43.68"
Fan w/48" downrod	61.97"	55.68"
Fan w/60" downrod	73.97"	67.68"
Fan w/72" downrod	85.97"	79.68"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

188 x 25 motor is designed for optimal performance with this fan.

BLADES:

A set of five wood blades is included.

CONTROL OPTIONS:

TR20WH hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels, reverse and off button. Optional C21 wall control is available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Leaf downlight kit with three 40-watt candelabra bulbs is included. Maximum downlight wattage is not to exceed 120 watts.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

LOCATION USE:

Fan is dry location rated only. Damp location rated when used with optional all-weather composite blade set (BPW21CF).

Available Finishes

Model	Fan Finish	Blade Finish	Glass
HF6200BZ	Bronze	Coffee	Stone
HF6200DS	Dark Smoke	Slate	Opal
HF6200MH	Mahogany	Coffee	Stone

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	163	5784	81	0.61	72
Med	102	3470	109	0.39	32
Low	64	2052	136	0.26	15