

INSTALLATION INSTRUCTIONS

For Model 7096-03



PLEASE READ AND SAVE THESE INSTRUCTIONS

These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning installation of the lighting fixture. We strongly suggest that all direct wired fixtures be installed by a qualified, licensed electrician.

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

BEFORE INSTALLATION

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

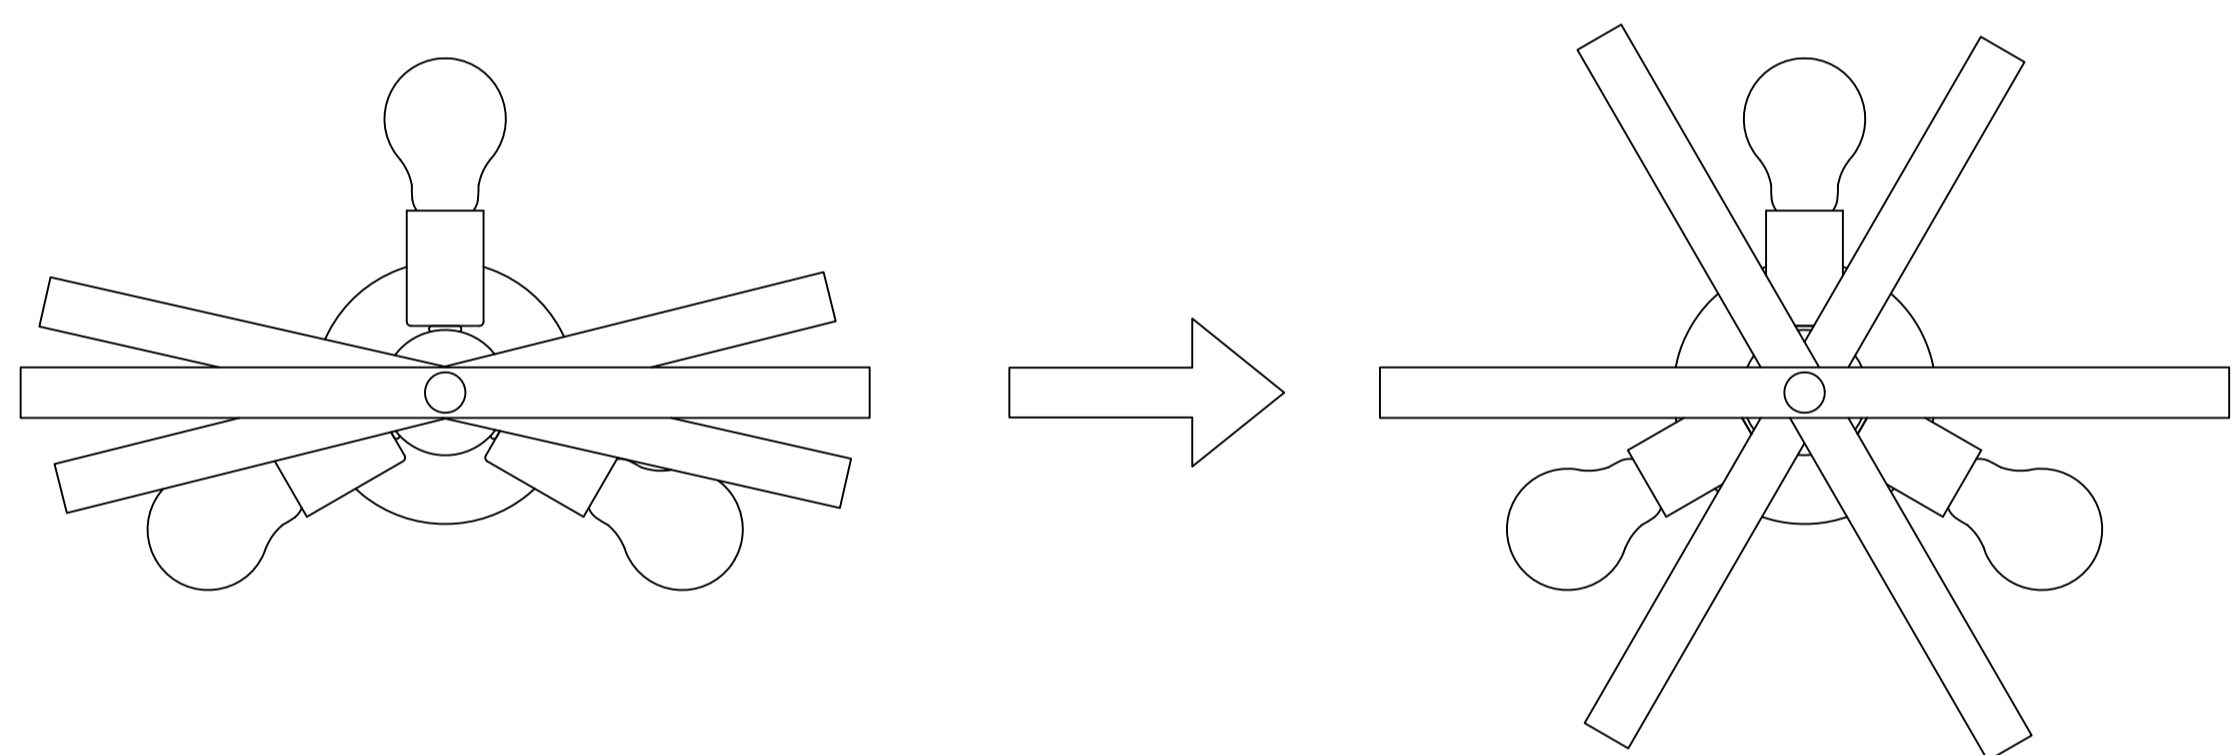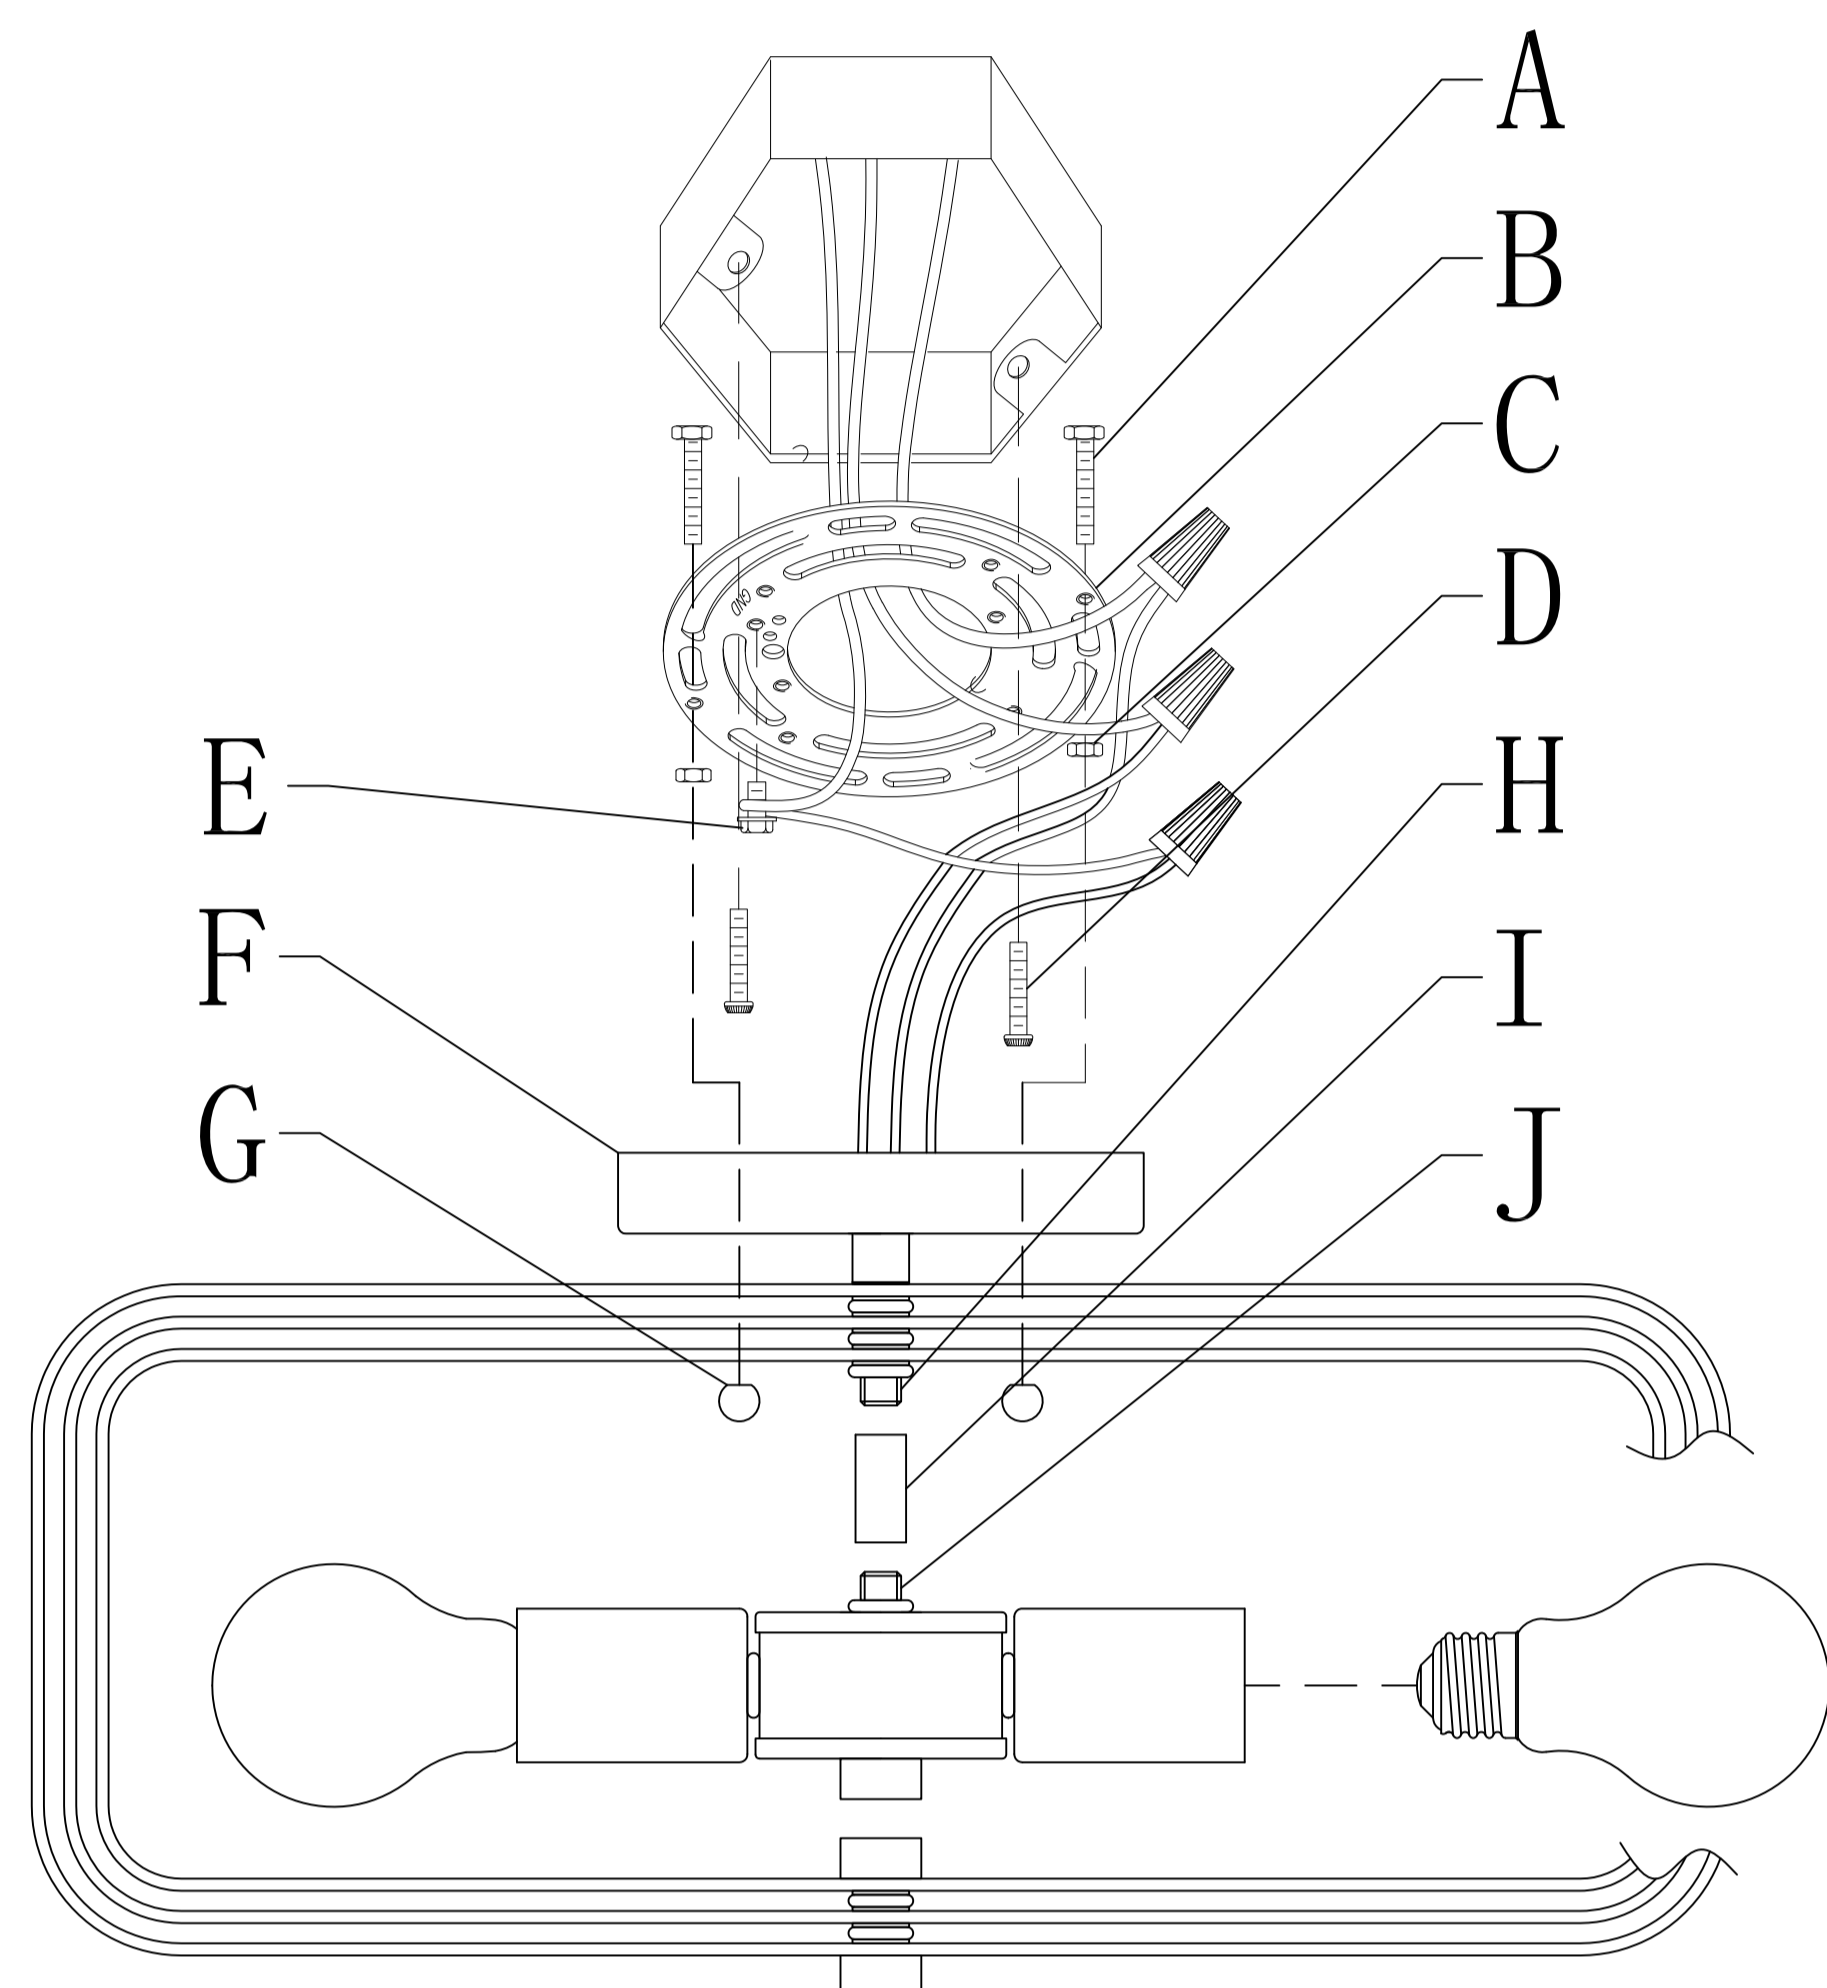

PREPARING FOR INSTALLATION


Carefully remove all contents from the carton. See the important illustrations above. Shut off the power at the circuit breaker and completely remove the old fixture from the ceiling, including the old mounting strap. Remove the mounting strap assembly from the bag. The mounting plate (B) contains several threaded holes. Find the holes that match the spacing of the holes on the junction box and the fixture's canopy. Two mounting screws (A) should be attached to mounting plate (B). You may need to tighten the nuts (C) to hold these screws in place. Pull the house wires through the center of mounting plate (B). Place the mounting plate (B) over the junction box so that the mounting screws (A) are vertical and aligned with the hole locations on the fixture's canopy (F). Secure the mounting plate (B) to the junction box by tightening the screws.

ASSEMBLING THE FIXTURE

Pull the fixture wires through the top of the canopy. Screw Coupling (I) to connect with the nipple (J) and nipple (H). Then spread the fixture frame to adjust the sockets to suitable angle.

CONNECTING THE WIRES

Have an assistant support the fixture's weight while completing the wiring. Attach the fixture's wires to the power supply wires from the junction box. Connect black to black (or smooth); white to white (or ribbed); ground to ground (green or copper). Twist the ends of the same color wire pairs to the same color wire coming from the junction box (white with white and black with black). **DO NOT CONNECT DIFFERENT COLORED WIRES TOGETHER.** Make sure all twists are in the same direction. If there is no ground wire (green or copper) from the junction box, locate ground screw (E) on mounting plate (B) and wrap the fixture's ground wire around the green ground screw (E). Use screwdriver to secure ground screw (E) onto mounting plate (B). Tuck all wires neatly into the junction box.

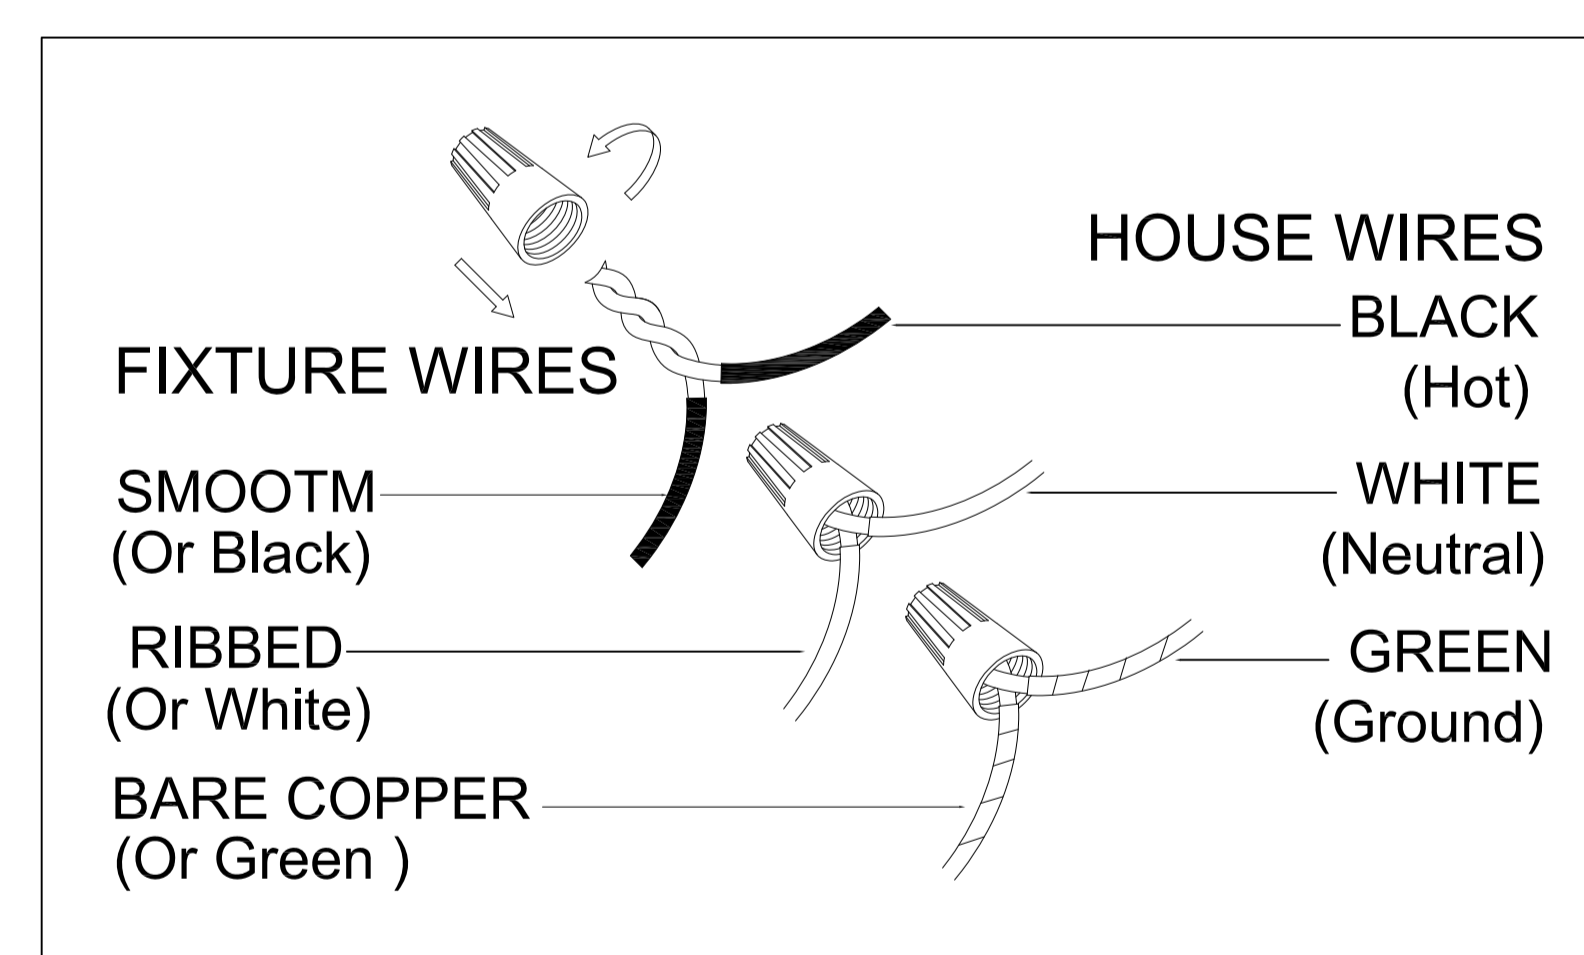

FINISHING THE INSTALLATION

Place the canopy (F) flush to the ceiling and tighten the nuts (G) onto the exposed mounting screws (A).

Install a light bulb (not included) in accordance with the fixture's specifications. Do not exceed the recommended maximum wattage.

Your installation is now complete. Turn on the power and test the fixture.

CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture. Dry with a lint-free or microfiber cloth.