

DOLCE

FR43511BRC

Bulbs: 60W MED.

Replacement Parts: GLASS: R43511GL



ASSEMBLY INSTRUCTIONS

The assembly of this fixture will be accomplished by first assembling the fixture, installing the fixture glass, determining what mounting style you will use, installing the mounting bracket to the junction box, making all necessary electrical connections and hanging the fixture from the ceiling.

SAFETY WARNING: Read wiring and grounding instructions [FRIS 18] and any additional directions. Turn power supply off during installation. If new wiring is required, consult a qualified electrician or local authorities for code requirements.

STEP 1

- 1 At this point you must determine if the fixture is to be chain hung or mounted to the ceiling. Please see instructions below for each option.

STEP 2 CHAIN HUNG INSTRUCTIONS *Refer to Hanging*

Instruction Sheet [FRIS19] to hang fixture. Then refer back to this sheet to continue installation of this fixture.


STEP 3 CEILING MOUNT INSTRUCTIONS

- 1 For ceiling mount, remove loop (1) from the threaded center stem (a) - See Drawing 1.
- 2 Take canopy (3) with small center hole and slip it over threaded center stem (a).
- 3 Slip lockwasher (4) over threaded center stem (a).
- 4 Thread hex nut (5) onto center stem (a) and tighten to secure canopy (3). Making sure edges are parallel with cage edges.
- 5 Refer to hanging instruction sheet [FRIS20] to hang fixture. then refer back to this sheet to continue installation of this fixture.

STEP 4

- 1 To install glass, slip rubber washer (5) onto bottom stem (b) followed by ring (5a) - See Drawing 1
- 2 Slip center hole of glass (6) over bottom stem (b) and hold in position.
- 3 Slip flat washer (7) onto bottom stem (b) and thread hex nut (8) onto bottom stem (b) and tighten to secure.
- 4 Slip cap (9) and thread decorative knob (10) onto bottom stem (b).

[DRAWING 1]

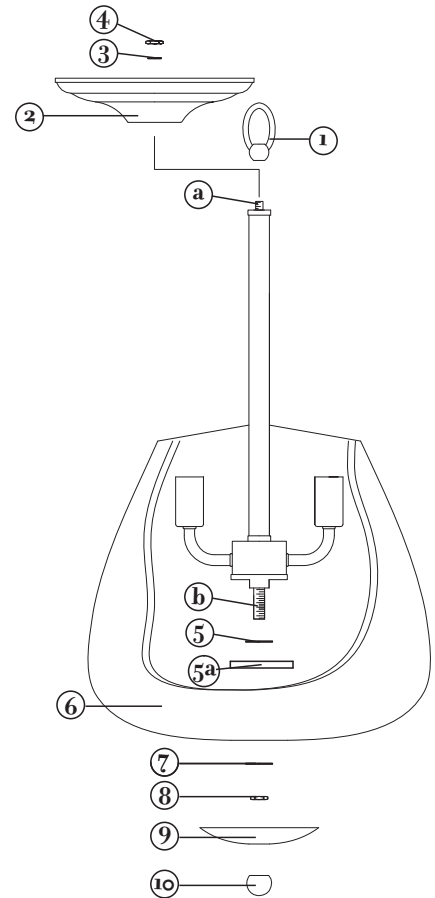

FREDRICK RAMOND

ESTABLISHED 1965

800.421.3517 WWW.FREDRICKRAMOND.COM

11.18.09