

# Side-by-Side Refrigerator

FPSC2277RF



#### Signature Features



#### PureAir Ultra® Filtration System

Fresh air offers great taste. PureAir Ultra® Filtration removes up to 7 times more odor than baking soda to keep ingredients tasting fresh by removing odor particles with fastacting, highly absorbent carbon technology.



#### Counter-Depth Design

Built-in look, maximize your space. Save over 4 inches of kitchen floor space with our counter-depth design.2



## Smudge-Proof™

Resists fingerprints and cleans easily.



#### PureSource Ultra® II Water Filtration

Drink and Cook with Pure Water. PureSource Ultra® II Water Filters remove 99.3% of lead and 99.99% of cysts from your household water.3

### 23 Cu. Ft. Counter-Depth

#### **Product Dimensions**

Height (Including Hinges & Rollers) 69-7/8" Width (Doors) 36" Depth (Including Door) 28-1/2"

#### More Easy-To-Use Features

#### SpacePro™ Ice Maker

Offers more freezer space, and more ice storage.4

### PowerGlide™ Sliding Shelves

Offers 3 sliding shelves for accessibility to fresh foods — and they're spill-safe.

### SpacePro™ Crisper Bins

Keep produce fresh with our stacked crisper bins.

#### SpacePro™ Freezer System

Optimize your freezer space with our SpacePro™ Freezer System featuring one door bin, three shelves, two baskets, and two tilt-out door bins, keeping frozen foods organized and accessible.

### **Automatic Alerts**

Alerts you if the door is left open, if the temperature rises or if the power goes out so your food stays at its optimal temperature.

#### PowerBright™ LED Lighting

Find fresh foods quickly with PowerBright™ bright LED Lighting.

Built-in look, without the remodel. Optional trim kit available.

### SpacePro™ Gallon Door Bin

Offers one gallon-size door bin.

Sabbath Mode (Star-K® Certified)

#### Available in:



<sup>1</sup>Based on a six-hour closed door test of certain common odors in the fresh food compartment of a 21 cu. ft. refrigerator.

<sup>2</sup>Compared to a Frigidaire® standard-depth side-by-side refrigerator.


<sup>3</sup>Tested and certified by NSF\* International. See performance data sheet for individual contaminants and reduction performance.


<sup>4</sup>Compared to a 2015 Frigidaire® side-by-side refrigerator.

## Side-by-Side Refrigerator

FPSC2277RF 23 Cu. Ft. Counter-Depth

Features	
Door Design	Flat
Door Handle Design	Stainless Steel
Cabinet Finish	Grey
Door Stops/Door Closers	Yes/Yes
Door Hinge Covers	Hidden
Rollers - Front/Rear	Adjustable/Yes
Energy Saver Plus Technology	Yes
Water Filter Location	Top Right Rear
Sound Package	Quiet Pack
Dispenser	
Controls	Pro-Select®
Dispenser Design	Flush, Single Paddle
Number of Control Buttons	11
Crushed Ice/Cube Ice/Water	Yes/Yes/Yes
Ice Option	PowerPlus* Ice
Freeze Option	PowerPlus* Freeze
Display On/Off Option	Yes
Control Lock/Light	No/Yes
Temp/Door Ajar/Power Failure Alerts	Yes/Yes/Yes
Water Filter Change Indicator Light	Yes
Air Filter Change Indicator Light	Yes
Refrigerator Features	
Interior Lighting	PowerBright™ LED
Water Filter Type	PureSource Ultra® II
Air Filter Type	PureAir Ultra*
Fixed Shelves	
Sliding Shelves	3 PowerGlide™
Cool Zone™ Drawer	1 Stacked
Wine/Can Rack	No/1 Clear
SpacePro™ Upper Crisper/	1 Clear/
SpacePro™ Lower Crisper	1 Clear
Humidity Controls	2
Dairy Compartment	1 Clear
SpacePro™ Fixed Door Bins	1 One-Gallon Clear
Adjustable Door Bins	0.00
Non-Slip Bin Liner / Bottle Retainers	2 Silver/1 Clear
Condiment Bin	
Freezer Features	
Door Bins/Tilt-Out Wire Door Bins	1 Clear/2
Fixed Shelves	2 Glass
Full Extension Baskets	
Full Freezer Baskets	2 Wire
Half Freezer Baskets	1 Wire
Ice Cream Shelf/Pizza Shelf	
SpaceSaver™ Shelf	Yes
Lighting	PowerBright™ LED
SpacePro™ Automatic Ice Maker	Yes
Certifications	
A.D.A. Compliant <sup>1</sup>	Yes
ENERGY STAR*	
Sabbath Mode (Star-K* Certified)	Yes
Specifications	
Total Capacity (Cu. Ft.)	22.6
Refrigerator Capacity (Cu. Ft.)	14.1
Freezer Capacity (Cu. Ft.)	8.5
Power Supply Connection Location	Right Bottom Rear
Water Inlet Connection Location	Left Bottom Rear
Voltage Rating	120V/60Hz/15A
Connected Load (kW Rating) @ 120 Volts <sup>2</sup>	1.02
Amps @ 120 Volts	8.5
po @ 120 voits	
Minimum Circuit Required (Amps)	15

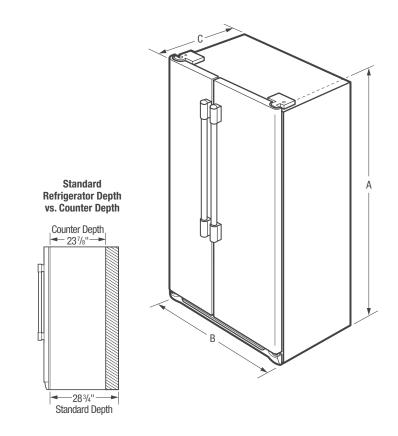



NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.




Product Dimensions	
A-Height (Incl. Hinges & Rollers)	69-7/8"
B-Cabinet Width/Door Width	35-7/8"/36"
C-Depth (Incl. Door)	28-1/2"
Depth with Door Open 90°	45"


When properly installed, this model is A.D.A.-qualified based on the United States Access Board's A.D.A./ A.B.A. Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design. <sup>2</sup>For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

"Built-In Look" Cutout Dimensions	
Height (Incl. Hinges & Rollers)	70-1/4"
Width	36"
Depth	25"

Accessories information available on the web at **frigidaire.com** 

#### FRIGIDAIRE.



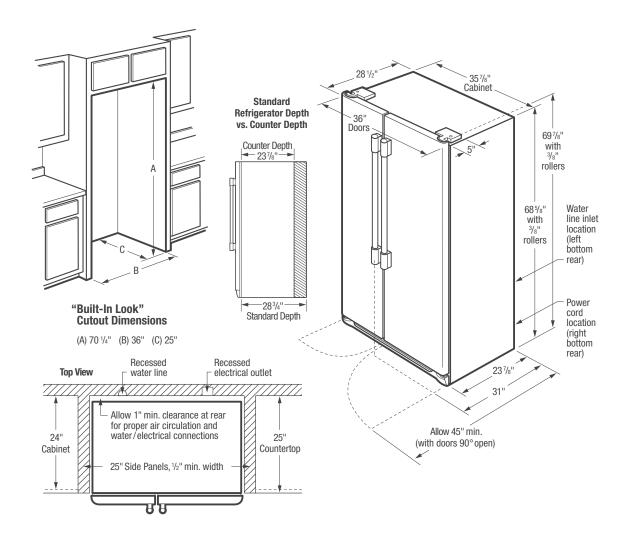

#### Side-by-Side Refrigerator Specifications

- Product Shipping Weight (approx.) 325 Lbs.
- Voltage Rating 120V/60 Hz/15 Amps
- Connected Load (kW Rating) @ 120 Volts = 1.02 kW (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120 Volts = 8.5 Amps
- Always consult local and national electric & plumbing codes.
- Floor should be level surface of hard material, capable of supporting fully loaded refrigerator.
- When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 120° to 180° door swing, providing complete drawer/crisper access and removal. (Absolute 4-1/2" minimum clearance will ONLY allow for 90° door swing which will provide drawer/crisper access with restricted removal.)
- To ensure optimum performance, avoid installing in direct sunlight or close proximity to range, dishwasher or other heat source.
- For proper ventilation, front grille MUST remain unobstructed.

- Recess electrical outlet when possible.
- Water recess on rear wall recommended to prevent water line damage.
- Water Pressure Cold water line must provide between 30 and 100 pounds per square inch (psi).
- Copper tubing with 1/4" O.D. recommended for water supply line with length equal to distance from rear of unit to household water supply line plus 7 additional feet. Optional Water Supply Installation Kits available.
- Adjustable front rollers to assist with door alignment.

## "Built-In Look" Specifications

- Minimum opening of 70-1/4" H x 36" W x 25" D required to allow for ease of installation, proper air circulation, and plumbing/electrical connections.
- Remove all wall/floor molding prior to installation.

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.com for detailed instructions.

