



Drop-In Cooktop

FFGC3603LW

36" Gas



Product Dimensions

Width	36"
Depth	18-5/8"
Height	3-1/4"

More Easy-To-Use Features

Porcelain Cooktop Grates

Grates are durable and easy to clean.

LP Gas Conversion Option

A.D.A. Compliant

When properly installed, this model is A.D.A.-qualified based on the United States Access Board's A.D.A./A.B.A. Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design.



Available in:



White
(W)

Burners	BTU
Right Front	9,000
Right Rear	9,000
Left Front	9,000
Left Rear	9,000

Signature Features

Ready-Select® Controls

Select options or control cooking temperature with our easy-to-use controls.

Color-Coordinated Control Knobs

White cooktops come with matching knobs.

Electronic Pilotless Ignition

Saves energy and can be ignited manually when electricity is out.


Spill Saver™ Drip Bowls

Cooktop features chrome drip bowls that make cleaning up spills quick and easy.

Features	
Controls	Ready-Select®
Surface Type	Color-Coordinated Porcelain
Grates	Steel Round with Black Gloss Finish
Right Front Element (BTU)	9,000
Right Rear Element (BTU)	9,000
Left Front Element (BTU)	9,000
Left Rear Element (BTU)	9,000
Control Location	Center Front
Knob Color	Color-Coordinated
Knob Type	Plastic
Bowl Type	Chrome
Certifications	
A.D.A. Compliant¹	Yes
Specifications	
Power Supply Connection Location	Center Front
Gas Supply Connection Location	Center Front
LP Gas Conversion Kit	Included
Voltage Rating	120V / 60V / 15A
Connected Load (kW Rating) @ 120 Volts²	.8
Amps @ 120 Volts	1.0
Minimum Circuit Required (Amps)	15
Approved for Electric Single Wall Oven Combination Installation	
Shipping Weight (Approx.)	30 Lbs.

¹When properly installed, this model is A.D.A.-qualified based on the United States Access Board's A.D.A./A.B.A. Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design.

²For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

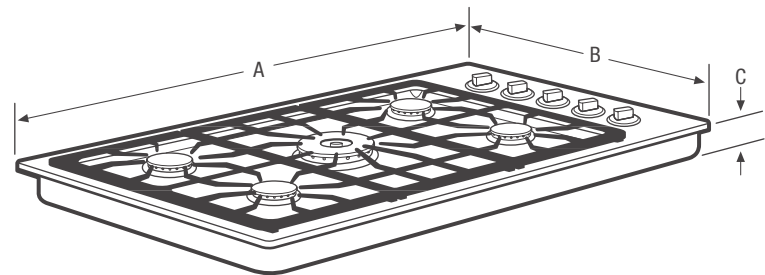

NOTE: Always consult local and national electric and gas codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.




Product Dimensions	
A - Width	36"
B - Depth	18-5/8"
C - Height	3-1/4"

Cutout Dimensions	
Width (Min.)	34-1/4"
Width (Max.)	34-3/8"
Depth (Min.)	16-5/8"
Depth (Max.)	16-3/4"
Height	8-1/4"

Granite Countertop Installation Kit available.

Accessories information available on the web at frigidaire.com

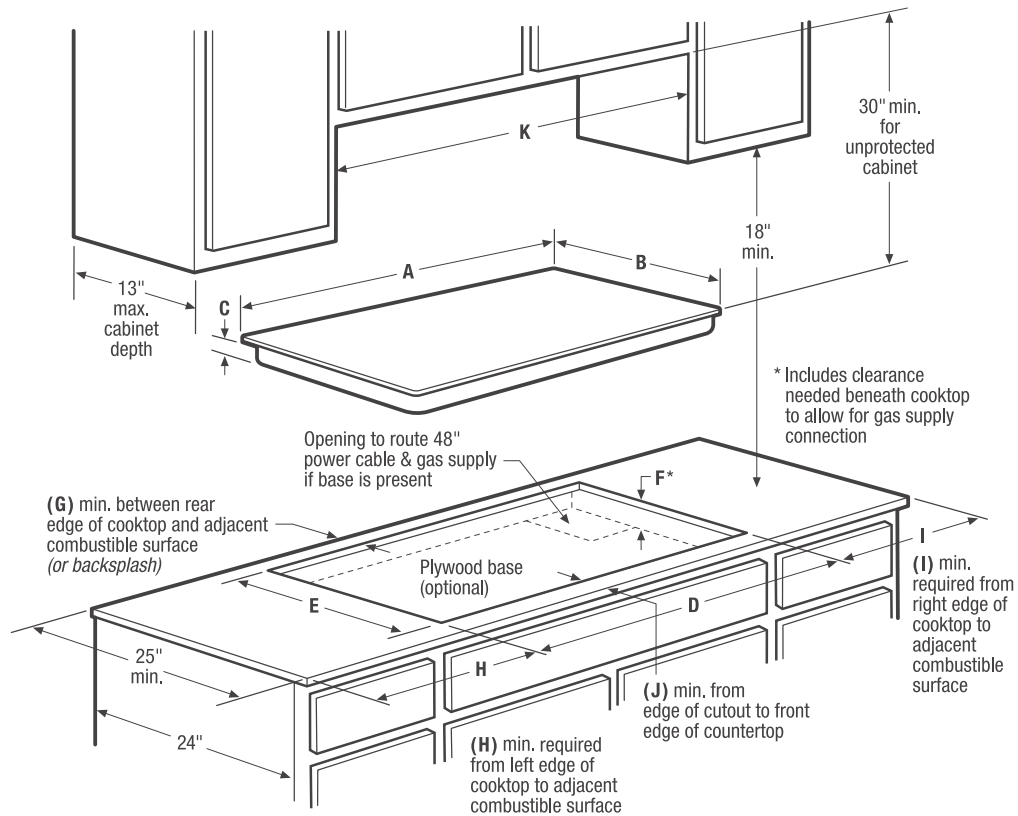

Product Dimensions			Required Clearances			
A - Width	B - Depth	C - Height	G (min.)	H (min.)	I (min.)	J (min.)
36"	18-5/8"	3-1/4"	2-1/2"	1"	1"	-
Product Cutout Dimensions			K - Cabinet Opening Width (min.)	Utility Connection Locations		
D - Width (min. - max.)	E - Depth (min. - max.)	F - Height (min.)*		Power Supply	Gas Supply	
34-1/4" - 34-3/8"	16-5/8" - 16-3/4"	8-1/4"	36"	Center Front	Center Front	

Drop-In Cooktop Specifications

- Product Shipping Weight (approx.) - 30 Lbs.
- Voltage Rating - 120V / 60 Hz / 15 Amps
- For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.
- Amps @ 120 Volts = 1.0 Amps
- Always consult local and national electric and gas codes.
- Cooktop cutout height includes clearance needed beneath cooktop to allow for gas supply connection. Recommended location for grounded 120V outlet is on rear wall in an 8"-wide by 10"-high area, positioned 22" above floor surface and 9-1/8" from right side of cooktop centerline. Access to underside of cooktop and junction box must be provided for inspection and service.
- Cooktop ships with 3/4" factory regulator.
- LP Gas conversion kit supplied.
- Overhead cabinetry should not exceed a 13" maximum depth.
- Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than 36".

- Allow 30" minimum clearance between top of cooktop platform and bottom of unprotected wood or metal overhead cabinet.
- Allow 2-1/2" minimum distance between rear edge of cooktop and adjacent combustible surface (or backsplash).
- Allow 1" minimum required clearance from left edge of cooktop to adjacent combustible surface and 1" minimum from right edge of cooktop to adjacent combustible surface.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.
- Gas Drop-In Cooktop model FFGC3603L is NOT approved to be used over any Frigidaire® Single Wall Oven.

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.com for detailed instructions.

Optional Accessories

- Granite Countertop Installation Kit - (PN # 903103-9010).