FRIGIDAIRE

PROFESSIONAL.

Dishwasher FPHD2485NF



Signature Features



Excellent Cleaning Performance Exclusive OrbitClean™ Technology provides 4 times better water coverage and a clean no other dishwasher can beat.¹



Best Drying Performance² With SaharaDry™ there's no need to towel-dry before putting dishes away.



Quietest Dishwasher in Its Class³ Quietest dishwasher, so it won't interrupt your time at home.



Fits-More[™] Capacity Our large capacity, tall-tub dishwasher fits up to 14 place settings so you can wash even more at once.



24" Built-In

Product Dimensions

Height (Adjustable)	33-1/2"-35"
Width	24"
Depth (Including Door)	25″

More Easy-To-Use Features

Built With American Pride

Appliances that are high-performing, more accessible, and more innovative than ever — designed, built and engineered in the U.S.A.

Energy Saver Plus Cycle Eco-friendly cycle uses less energy without compromising cleaning performance.

Energy Saver Dry Option No heat dry option.

DishSense™ Technology Sensors select the cycle for you based on your cleaning needs.

Quick Clean

Clean dishes faster with Quick Clean.

SpaceWise® Organization System

Our SpaceWise® Organization System features adjustable racks and the Largest Silverware Basket⁴ so there's a place for virtually anything.

Most Adaptable Delay Start 1 to 24-hour options.

NSF[®] Certified

Sanitize cycle removes 99.9% of common household bacteria.

Smudge-Proof™ Stainless Steel Reduces fingerprints and smudges so it's easy to clean.

ENERGY STAR* NSF* International Certification



Available in:

Stainless (F)

¹Than a traditional lower spray arm.

²Based on industry drying tests using SaharaDry™ (March 2012).

³In its class based on published manufacturer specifications for similar MSRP plastic interior dishwashers.

⁴Among leading brands.

FRIGIDAIRE


PROFESSIONAL

Fully-Integrated Pro-Select®
Yes
Yes/Yes
Yes
Tall Tub/GraniteGrey™
OrbitClean™ Technolog
5/5
Yes
Yes
SilentDesign™
S. Steel/Removable
Yes
52
SaharaDry™
Sundrabily
7
Yes
Yes
Yes
Yes
Yes
Yes
Yes
Yes/Yes
103/103
Yes/Yes
Yes
Yes
1-24 Hour
Maximum
Nylon TufRacks™
Yes
Yes
res
Vee
Yes
2
2 Yes
2
2 Yes Yes
2 Yes Yes 3-Piece Split
2 Yes Yes 3-Piece Split 2 Full Rows
2 Yes Yes 3-Piece Split
2 Yes Yes 3-Piece Split 2 Full Rows
2 Yes Yes 3-Piece Split 2 Full Rows 3
2 Yes Yes 3-Piece Split 2 Full Rows 3 Yes
2 Yes Yes 3-Piece Split 2 Full Rows 3
2 Yes Yes 3-Piece Split 2 Full Rows 3 Yes
2 Yes Yes 3-Piece Split 2 Full Rows 3 Yes
2 Yes 3-Piece Split 2 Full Rows 3 Yes Yes
2 Yes 3-Piece Split 2 Full Rows 3 Yes Yes Left Bottom Front
2 Yes Yes 3-Piece Split 2 Full Rows 3 Yes Yes Left Bottom Front 4.9 - 8.5
2 Yes Yes 3-Piece Split 2 Full Rows 3 Yes Yes Left Bottom Front 4.9 - 8.5 20 - 120
2 Yes Yes 3-Piece Split 2 Full Rows 3 Yes Yes Left Bottom Front 4.9 - 8.5 20 - 120 Yes
2 Yes Yes 3-Piece Split 2 Full Rows 3 Yes Yes Yes Left Bottom Front 4.9 - 8.5 20 - 120 Yes 4
2 Yes Yes 3-Piece Split 2 Full Rows 3 Yes Yes Yes Left Bottom Front 4.9 - 8.5 20 - 120 Yes 4 Right Bottom Front
2 Yes Yes 3-Piece Split 2 Full Rows 3 Yes Yes Yes Left Bottom Front 4.9 - 8.5 20 - 120 Yes 4 Right Bottom Front 120V/60Hz/15A
2 Yes Yes 3-Piece Split 2 Full Rows 3 Yes Yes Yes Left Bottom Front 4.9 - 8.5 20 - 120 Yes 4 Right Bottom Front 120//60 Hz/15A 1.44

¹ For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.



USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca FPHD2485N 02/14



NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.

c UL us	
Meets requirements of ASSE 1006	


Product Dimensions		Cut
A - Height (Adjustable)	33-1/2"-35"	Heig
B-Width	24"	Heig
C-Depth (Including Door)	25″	Wic
D - Depth (To Tub Flange)	22-1/2"	Dep
Depth with Door Open 90°	49-1/4"	

Itout Dimensions	
ight (Min.)	34-1/4"
ight (Max.)	35-1/4″
dth (Min.)	24"
pth (Min.)	24"

Accessories information available on the web at **frigidaire.com**

Specifications subject to change.

© 2014 Electrolux Home Products, Inc.

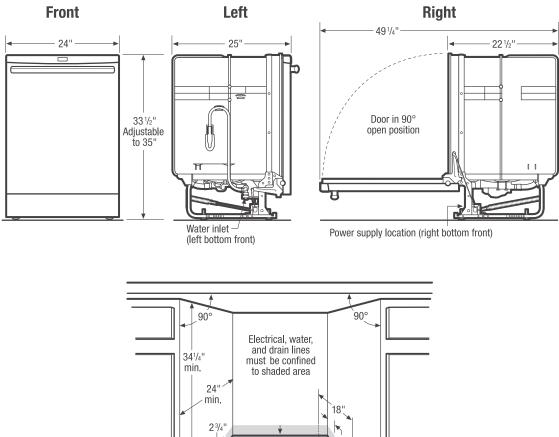

Ś' Electrical Hot water wiring 6 6 line 2¹/2" 2¹/2" 24"

Dishwasher Specifications

- Product Shipping Weight (approx.) 83 Lbs.
- Voltage Rating 120V/60 Hz/15 Amps (maximum 20 Amps if connected with disposer)
- Connected Load (kW Rating) @ 120 Volts = 1.44 kW (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120V = 10 Amps
- Always consult local and national electric & plumbing codes. Meets requirements of ASSE 1006 integral air gap on supply.
- Water Pressure Hot water line to dishwasher must provide between 20 and 120 pounds per square inch (psi) with at least 120° F hot water temperature.
- Make sure location has correct drain, water and electrical outlets to make connections.
- Electrical and water supplies should enter cabinet opening on floor, or through back or side walls, as shown in shaded areas.
- Keep back free of drain, water & electrical supply.

- · Connections preferably located toward left side of dishwasher. Do not cross drain, water or electrical lines in front of motor, blower or frame
- If connecting drain hose to sink trap, local code may require installation of Air Gap Kit (not included).
- · Leveling legs supplied to adjust height.
- When installing adjacent to wall, cabinet or other obstruction that extends beyond front edge of unit, allow 2" minimum clearance between opened door and obstruction.
- Floor should be flat and free of obstructions.
- When installing at end of cabinet line, sides and back must be fully enclosed.
- Do not install unit under a cooktop, damage will occur.
- Recommended to seal cabinets, enclosing all sides of dishwasher, including underside of countertop, with oil-based paint or moistureproof polyurethane to prevent possible steam/moisture damage.
- Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.com for detailed instructions.



FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

ecification subject to change.