# FRIGIDAIRE GALLERY



# Dishwashers

FGBD2445N F/W/B/Q



## Signature Features



# Outstanding Cleaning Performance

BladeSpray™ Arm provides more water coverage for better cleaning.



#### **Quiet Dishwasher**

A quiet performance every time so it won't interrupt your time at home.



## **DishSense™ Technology**

Sensors select the cycle for you based on your cleaning needs.



# Fits-More™ Capacity

Our large capacity, tall-tub dishwasher fits up to 14 place settings so you can wash even more at once.

# 24" Built-In

#### **Product Dimensions**

 Height (Adjustable)
 33-1/2"-35"

 Width
 24"

 Depth (Including Door)
 25"

## More Easy-To-Use Features

#### **Built With American Pride**

Appliances that are high-performing, more accessible, and more innovative than ever — designed, built and engineered in the U.S.A.

#### Effortless™ Dry

Get outstanding drying performance with Effortless™ Dry.

# **Energy Saver Dry Option**

No heat dry option.

# Most Adaptable Delay Start 1 to 24-hour options

Smudge-Proof™ Stainless Steel¹ Reduces fingerprints and smudges so it's easy to clean.

# NSF® Certified

Sanitize cycle removes 99.9% of common household bacteria.

# Multiple-Cycle Option

Features easy-to-use cleaning cycle options including Top Rack, Rinse Only and Heavy Wash.

# **Express-Select® Controls**

Easily select options with the touch of a button.

#### Stay-Put Door

The door stays put at whatever angle you open it.

# Low-Rinse Aid Indicator Light

## High Temperature Wash

ENERGY STAR\*

NSF\* International
Certification






#### Available in:




<sup>&</sup>lt;sup>1</sup>Select models only.

# FRIGIDAIRE GALLERY.

Features	
Control Design	Slimline Express-Select®
Digital Display	Yes
Door Latch/Stay-Put Door Hinge Design	Yes/Yes
Low Rinse-Aid Indicator Light	
Interior Design/Interior Color	Tall Tub/GraniteGrey™
Wash System	BladeSpray™ Arm
Wash Levels/Wash Speeds	5/1
DishSense™ Technology	Yes
AquaSurge™ Technology	
Sound Package	UltraQuiet™ IV
Filter/Filter Trap	S. Steel/Removable
Soft Food Disposer	Yes
dB Level	54
Drying System	Effortless™ Dry
Cycles	
Number of Cycles	4
Heavy	Yes
Normal	Yes
Light	
Quick	
Favorite	
China Crystal	
Rinse Only	Yes
Energy Saver Plus	
Upper Rack Wash Only	Yes
Cycle Indicator Light/Control Lock	No/Yes
Options	
Heat/No Heat Dry	Yes/Yes
Hi-Temp Wash	Yes
NSF® Certified Sanitize Rinse	Yes
Delay Start	1-24 Hour
Rack System	
	Premium
Rack Design	
Rack Coating	Nylon TufRacks™
Upper Rack - Rack Handles	Yes
	163
Stemware / Champagne Glass Holders Fold-Down Tines	Yes
Cup Shelves	2
Versa-Tray™	
Adjustable Racks	Yes
Lower Rack -	163
SpaceWise* Silverware Basket	3-Piece Split
Fold-Down Tines	5 Tiece Spire
Small Items Cover	
Certifications	
ENERGY STAR*	Yes
NSF® International Certification	Yes
Specifications	
Water Inlet Location	Left Bottom Front
Water Usage (Gallons)	4.9 - 8.5
Water Pressure (PSI)	20 - 120
Integral Air Gap on Supply	Yes
Leveling Legs	4
Leveling Legs	Right Bottom Front
Power Supply Connection Location	3
	120V/60Hz/15A
Power Supply Connection Location	
Power Supply Connection Location Voltage Rating	120V/60Hz/15A






NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.




Product Dimensions	
A - Height (Adjustable)	33-1/2" - 35"
B-Width	24"
C-Depth (Including Door)	25"
D-Depth (To Tub Flange)	22-1/2"
Depth with Door Open 90°	49-1/4"

Cutout Dimensions	
Height (Min.)	34-1/4"
Height (Max.)	35-1/4"
Width (Min.)	24"
Depth (Min.)	24"

Accessories information available on the web at **frigidaire.com** 

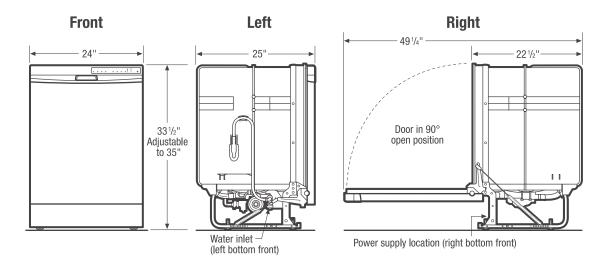



## **Dishwasher Specifications**

- Product Shipping Weight (approx.) 75 Lbs.
- Voltage Rating 120V/60 Hz/15 Amps (maximum 20 Amps if connected with disposer)
- Connected Load (kW Rating) @ 120 Volts = 1.44 kW (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120V = 10 Amps
- Always consult local and national electric & plumbing codes. Meets requirements of ASSE 1006—integral air gap on supply.
- Water Pressure Hot water line to dishwasher must provide between 20 and 120 pounds per square inch (psi) with at least 120°F hot water temperature.
- Make sure location has correct drain, water and electrical outlets to make connections.
- Electrical and water supplies should enter cabinet opening on floor, or through back or side walls, as shown in shaded areas.
- Keep back free of drain, water & electrical supply.

- Connections preferably located toward left side of dishwasher.
   Do not cross drain, water or electrical lines in front of motor, blower or frame.
- If connecting drain hose to sink trap, local code may require installation of Air Gap Kit (not included).
- · Leveling legs supplied to adjust height.
- When installing adjacent to wall, cabinet or other obstruction that extends beyond front edge of unit, allow 2" minimum clearance between opened door and obstruction.
- Floor should be flat and free of obstructions.
- When installing at end of cabinet line, sides and back must be fully enclosed.
- Do not install unit under a cooktop, damage will occur.
- Recommended to seal cabinets, enclosing all sides of dishwasher, including underside of countertop, with oil-based paint or moistureproof polyurethane to prevent possible steam/moisture damage.

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.com for detailed instructions.

