

GALLERY.

# Dishwashers

FGBD2434P F/W/B



# **Signature Features**



#### **Quiet Dishwasher**

A quiet performance every time so it won't interrupt your time at home.



#### **Effortless™ Dry**

Get outstanding drying performance with Effortless™ Dry.



# Fits-More™ Capacity

Our large capacity, tall-tub dishwasher fits up to 14 place settings so you can wash even more at once



#### **Built With American Pride**

Appliances that are high-performing, more accessible, and more innovative than ever - designed, built and engineered in the U.S.A.

# 24" Built-In

#### **Product Dimensions**

Height (Adjustable) 33-1/2"-35" Width 24" Depth (Including Door) 25"

#### More Easy-To-Use Features

#### **Energy Saver Dry Option** No heat dry option.

2-4-6 Hour Delay Start Set your dishwasher to run on your

# Smudge-Proof™ Stainless Steel<sup>1</sup>

Real Stainless Steel with a protective coating reduces fingerprints and smudges so it's easy to clean.

#### **NSF®** Certified

Sanitize cycle removes 99.9% of common household bacteria.

# **Multiple-Cycle Option**

Features easy-to-use cleaning cycle options including Top Rack, Rinse Only and Heavy Wash.

# **Express-Select® Controls**

Easily select options with the touch of a button.

# Stav-Put Door

The door that stays put at whatever angle you open it.

# Low-Rinse Aid Indicator Light

# **High Temperature Wash**

**ENERGY STAR®** NSF® International Certification





### Available in:





<sup>1</sup>Select model only.



GALLERY.

Features	
Control Design	Slimline Express-Select
Digital Display	
Door Latch/Stay-Put Door Hinge Design	Yes/Yes
Low Rinse-Aid Indicator Light	
Interior Design/Interior Color	Tall Tub/White
Wash System	Direct
Wash Levels/Wash Speeds	5/1
DishSense™ Technology	
AquaSurge™ Technology	
Sound Package	UltraQuiet™ III
Filter/Filter Trap	Plastic/Removable
Soft Food Disposer	Yes
dB Level	55
Drying System	Effortless™ Dry
Cycles	
Number of Cycles	4
Heavy	Yes
Normal	Yes
Light	
Quick	
Favorite	
China Crystal	
Rinse Only	Yes
Energy Saver Plus	
Upper Rack Wash Only	Yes
Cycle Indicator Light/Control Lock	Yes/Yes
Options	
Heat/No Heat Dry	Yes/Yes
Hi-Temp Wash	Yes
NSF® Certified Sanitize Rinse	Yes
Delay Start	2-4-6 Hour
Rack System	
Rack Design	Deluxe
Rack Coating Upper Rack -	Nylon TufRacks™
Rack Handles	Yes
Stemware / Champagne Glass Holders	Yes
Fold-Down Tines	163
Cup Shelves	2
Versa-Tray™	<del>-</del>
Adjustable Rack	
Lower Rack -	
SpaceWise* Silverware Basket	Ultra 1
Fold-Down Tines	
Small Items Cover	
Certifications	
	Ves
ENERGY STAR*	Yes
NSF® International Certification	Yes
Specifications	
Water Inlet Location	Left Bottom Front
Water Usage (Gallons)	4.9 - 8.5
Water Pressure (PSI)	20 - 120
Integral Air Gap on Supply	Yes
Leveling Legs	4
Power Supply Connection Location	Right Bottom Front
Voltage Rating	120V/60Hz/15A
Connected Load (kW Rating)@120 Volts1	1.44
Amps @ 120 Volts Shipping Weight (Approx.)	10 72 Lbs.






NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.


Product Dimensions	
A - Height (Adjustable)	33-1/2" - 35"
B-Width	24"
C-Depth (Including Door)	25"
D-Depth (To Tub Flange)	22-1/2"
Depth with Door Open 90°	49-1/4"

Cutout Dimensions	
Height (Min.)	34-1/4"
Height (Max.)	35"
Width (Min.)	24"
Depth (Min.)	24"

Accessories information available on the web at frigidaire.com

**Dishwashers** 

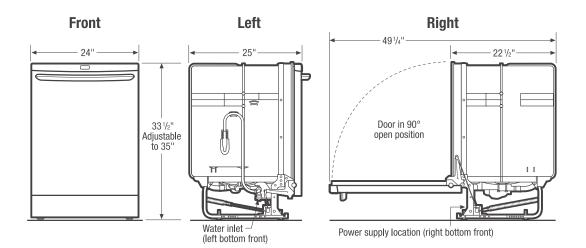



# **Dishwasher Specifications**

- Product Shipping Weight (approx.) 72 Lbs.
- Voltage Rating 120V/60 Hz/15 Amps (maximum 20 Amps if connected with disposer)
- Connected Load (kW Rating) @ 120 Volts = 1.44 kW (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120V = 10 Amps
- Always consult local and national electric & plumbing codes. Meets requirements of ASSE 1006—integral air gap on supply.
- Water Pressure Hot water line to dishwasher must provide between 20 and 120 pounds per square inch (psi).
- Make sure location has right drain, water and electrical outlets to make connections.

- Keep back free of drain, water & electrical supply.
- Electrical and water supplies should enter cabinet opening on floor, or through back or side walls, as shown in shaded areas.
- Connections preferably located toward left side of dishwasher. Do not cross drain, water or electrical lines in front of motor, blower or frame.
- When installing adjacent to wall, cabinet or other obstruction that extends beyond front edge of unit, allow 2" minimum clearance between opened door and obstruction.
- When installing at end of cabinet line, sides must be fully enclosed.
- Do not install unit under a cooktop, damage will occur.

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.com for detailed instructions.