



Dryer

FFRG1001PW

8 Dry Cycles
7.0 Cu.Ft. D.O.E. Gas



Product Dimensions

| | |
|--------|---------|
| Height | 42-1/2" |
| Width | 27" |
| Depth | 29" |

More Easy To Use Features

4 Timed Dry Cycles

4 Temperature Selections

Chime On/Off Alert

Available in:



Classic
White
(W)

**Select Models. Based on 7.0 cu. ft. capacity on 36" installation platform.*

Signature Features

Ultra-Capacity Dryer*

Largest capacity lets you do the most laundry in the least amount of time.

Wrinkle Release Technology

This option features a Wrinkle Release System that finishes by tumbling without heat, preventing wrinkles, so your clothes look great every time


Ready-Select® Controls

Easily select options with the touch of a button.

Reversible Door

Choose which direction you want the door to open to accommodate your space.

| Features | |
|---|-------------------|
| Total Capacity D.O.E. (Cu.Ft.) | 7.0 |
| Controls | Ready-Select® |
| Dryer Drum Interior | Painted Steel |
| Interior Light | |
| Framed Glass Window Door | |
| DrySense™ Technology | |
| Wrinkle Release Technology | Yes |
| TimeWise® Technology | |
| Moisture Sensor | |
| Estimated Time Remaining | |
| Cycle Status Lights | Yes |
| Cycle Signal | Chime |
| Cycle Signal "On/Off" | Yes |
| Control Lock | |
| Start / Pause / Cancel Knobs | Yes |
| Delay Start | |
| Tumble Speed (RPM) | 50 |
| Reversible Door | Yes |
| Lint Screen | Yes |
| Sound Package | |
| Adjustable Leveling Legs | 4 |
| Cycles | |
| Dry Cycles | 8 |
| Specialty Cycles | 0 |
| Options | |
| Temperature Selections | 4 |
| Dryness Level Selections | 0 |
| Timed Dry | 15, 30, 60, 90 |
| Energy Saver Option | |
| Optional Accessories | |
| Mobile Home Installation Kit | PN# 137067200 |
| LP Gas Conversion Kit | PN# PCK4200 |
| Drying Rack | PN# 137067300 |
| Certifications | |
| NSF® Certified | |
| Specifications | |
| Maximum Exhaust Duct Length ¹ (Ft.) | 64 |
| Gas Connection | Rear |
| Power Cord Location | Rear |
| Voltage Rating | 120V / 60Hz / 15A |
| Connected Load (kW Rating) @ 120 Volts ² | 4.0 |
| Amps @ 120 Volts | 9.0 |
| Heating Element (BTU / Hr.) | 20,000 |
| Shipping Weight (Approx.) | 143 Lbs. |

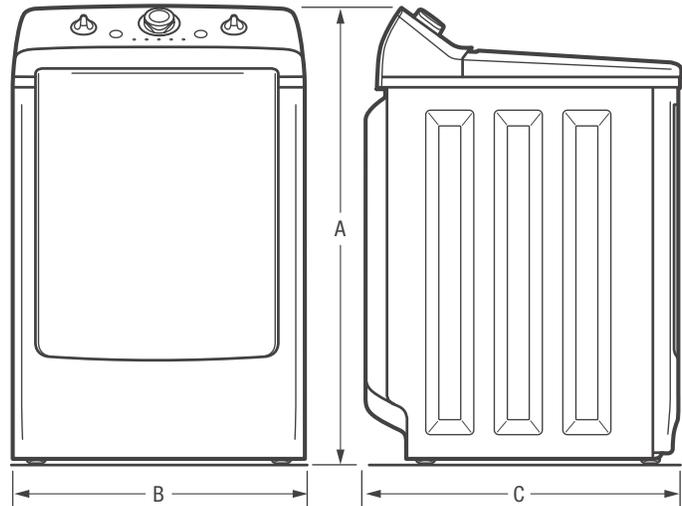

NOTE: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.




¹Rigid metal duct preferred, semi-rigid optional and allow deductions for elbows and vents. Refer to Installation Guide on web for additional information.

²For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

| Product Dimensions | |
|--------------------|---------|
| A - Height | 42-1/2" |
| B - Width | 27" |
| C - Depth | 29" |

Accessories information available on the web at frigidaire.com

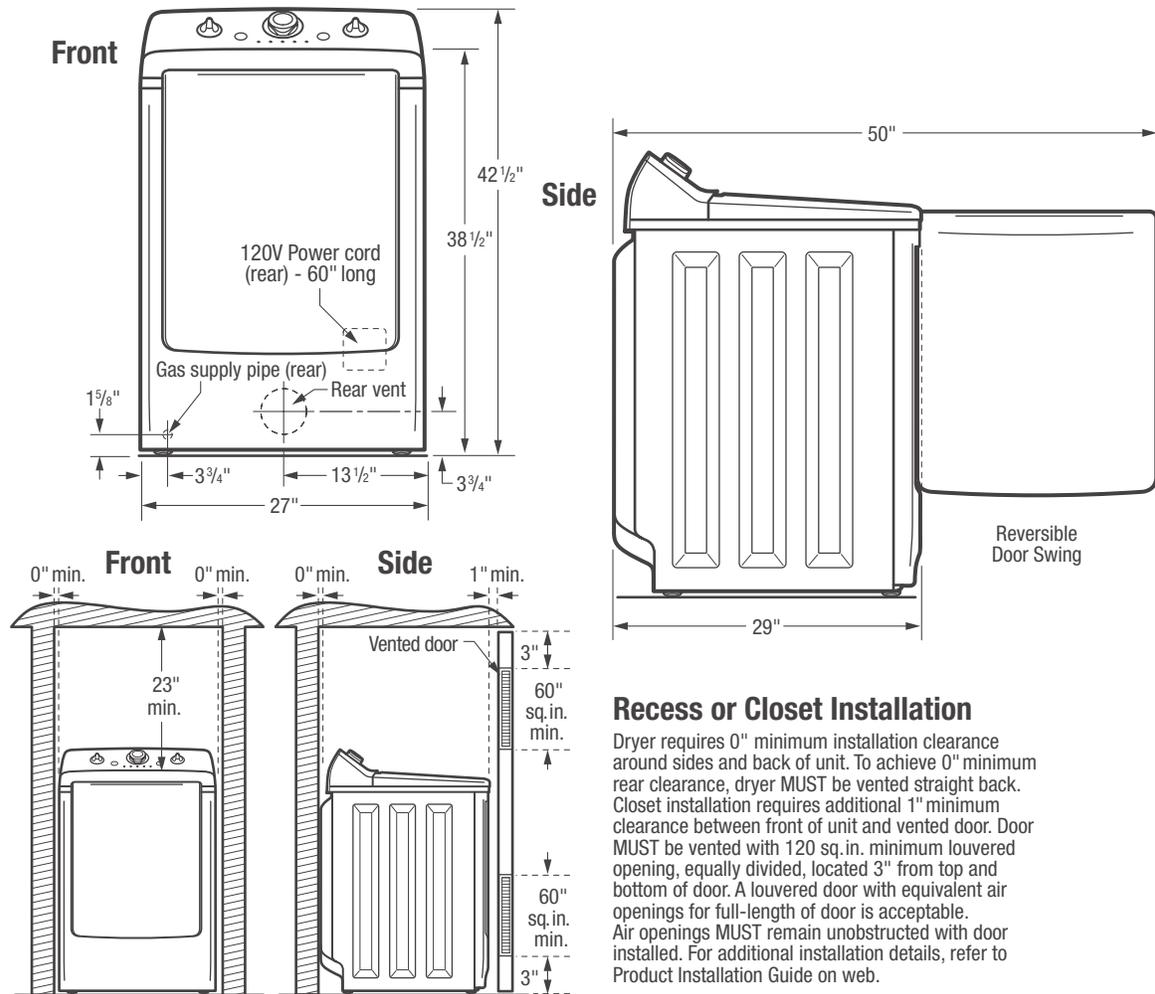

Recess or Closet Installation

Dryer requires 0" minimum installation clearance around sides and back of unit. To achieve 0" minimum rear clearance, dryer MUST be vented straight back. Closet installation requires additional 1" minimum clearance between front of unit and vented door. Door MUST be vented with 120 sq.in. minimum louvered opening, equally divided, located 3" from top and bottom of door. A louvered door with equivalent air openings for full-length of door is acceptable. Air openings MUST remain unobstructed with door installed. For additional installation details, refer to Product Installation Guide on web.

Top Load Dryer Specifications

- Product Shipping Weight (approx.) - 143 Lbs.
- Designed for HOME USE only, not recommended for commercial application.
- Always consult local and national electric & gas codes.
- Electrical supply with grounded three-prong receptacle is required. Power supply circuit must be installed in accordance with current edition of National Electrical Code (ANSI/NFPA 70) and local codes & ordinances. (Do not use same circuit as washer.)
- Gas supply line should be 1/2" black iron, stainless steel, or plastic-coated brass pipe and MUST have individual shutoff valve, located within 6 feet of dryer. Gas supply line must be installed in accordance with current edition of National Fuel Gas Code (ANSI Z223.1) and local codes & ordinances.
- Voltage Rating - 120V/60 Hz/15 Amps
- Amps @ 120 Volts = 9.0 Amps
- Connected Load (kW Rating) @ 120 Volts = 4.0kW
- Equipped with 120V 3-wire power supply cord, approx. 60" long.
- Dryer can be installed in recess or closet requiring 0" minimum installation clearance around sides and back of unit. To achieve 0" minimum rear clearance, dryer MUST be vented straight back. Closet installation requires additional 1" minimum clearance between front of unit and vented door. Door MUST be vented with 120 sq.in. minimum louvered opening, equally divided, located 3" from top and bottom of door. A louvered door with equivalent air openings for full-length of door is acceptable. Air openings MUST remain unobstructed with door installed. (For additional installation details, refer to Product Installation Guide on web.)

- Do NOT install in area exposed to dripping water or outdoor weather conditions; where gasoline or other flammables are kept or stored; or where dryer comes in contact with curtains, drapes or anything that will obstruct flow of combustion and ventilation air.
- For garage installation, dryer MUST be located minimum 18" above floor.
- Floor MUST be solid with 1" maximum slope. Do NOT install on carpeted surface.
- Dryer MUST exhaust to outside of building, NOT into any concealed space.
- Exhaust installation requires minimum 4"-diameter rigid or semi-rigid metal duct with approved, unobstructed vent hood having swing-out damper(s). If installing rigid metal duct (preferred), do not exceed MAXIMUM venting run length of 64 ft., allow deductions for elbows and vents. If installing semi-rigid metal duct, do not exceed MAXIMUM venting run length of 8 ft., always allow deductions for elbows and vents. (Refer to Product Installation Guide on web for additional information.) Do NOT use flexible plastic or metal foil duct and use shortest run possible.
- Leveling legs supplied to level dryer properly and reduce excessive noise and vibration.
- For manufactured or mobile home installation optional Mobile Home Installation Kit (PN# 137067200) required. (For specific installation details, refer to Product Installation Guide on web.)

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.com for detailed instructions.

Optional Accessories

- Mobile Home Installation Kit - (PN# 137067200).
- LP Gas Conversion Kit - (PN# PCK4200).
- Drying Rack - (PN# 137067300).



Specifications subject to change.

FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
 CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

FFRG1001P 10/13

© 2013 Electrolux Home Products, Inc.