



Latitude² Grab Bar

General Installation Instructions

PREPARATION

Tools Required for Assembly: (Not included)



- Pencil
- Electrical drill
- Tape measure
- Level
- Safety glasses



! CAUTION: Wood blocking is preferable behind all wall surfaces. If wood blocking is not available, the following optional fasteners are suggested: Tile/Masonry – Plastic or lead anchors
Plaster/Drywall – Toggle bolts

INSTALLATION INSTRUCTIONS

1. Uncover the wall flange under the cover flange.
Hold the grab bar up against desired position on wall, and mark the positioning of the screw holes.
Use a measuring tape and a level for accuracy.
2. Install grab bar with 4 - #10 × 2” panhead stainless steel screws provided for each end wall flange.
3. Slide cover flanges over wall flanges and press firmly to complete installation.

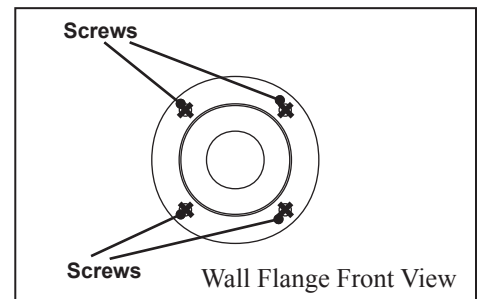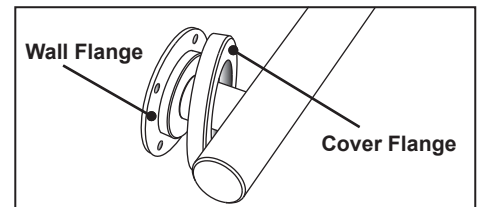

CARE AND MAINTENANCE

To maintain the luster finish, please use soft damp cloths when cleaning and never use any cleaning solvents.