

# AH11H09D3B

## Hotpoint® PTAC Heat Pump Unit with Electric Heat Backup 20 amps, 230/208 Volt

### DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

#### ELECTRICAL WIRING

All wiring, including installation of receptacle, must be made in accordance with local electrical codes and regulations.

**NOTE:** Aluminum wiring may pose special problems – consult a qualified electrician.

#### GRILLE OPTIONS


Stamped Aluminum Grille – RAG70

#### ELECTRICAL CONNECTION

230/208 volt units must be plugged into a receptacle. Installation must comply with local electrical codes and regulations.

Power cord is permanently attached on all Hotpoint chassis.

#### WALL CASE DIMENSIONS

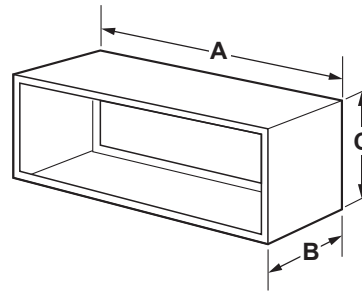


#### RAB80 WALL SLEEVE

Heavy-gauge galvanized steel, with insulation, for quick self-assembly.

A – 42", B – 13-3/4", C – 16"

#### MAXIMUM CORD EXTENSION

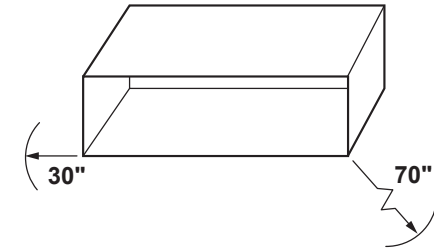

#### WALL OPENING DIMENSIONS

Add 1/4" to A and C dimensions for all cut-outs.

RAB80 16-1/4" Min. H x 42-1/4" Min. W

AH11 HEATER KW	
230/208 VOLT	LINE CORD CONNECTED UNITS
Heater Watts	3604.5/2966
Heater BTU	10900/8900
Heater Amps	15.7/14.3
Min Circuit	20
Recommended Protective Device	20 amp time-delay fuse or breaker

# AH11H09D3B

## *Hotpoint® PTAC Heat Pump Unit with Electric Heat Backup 20 amps, 230/208 Volt*

### **FEATURE AND BENEFITS**

9,000/8,800 cooling BTU

11.4 EER

8,100/7,900 heating BTU

3.4 COP

3-Speed Fan – Give guests control over their comfort with three fan speeds to choose from

4-Temperature Limiting Options – Easily select one of four temperature ranges for peak efficiency and total customer comfort

Intuitive Display – Allow guests to easily customize their preferred settings and reduce maintenance calls with an easy-to-use control panel

Power Cord (LCDI) Included – Hotpoint PTACs come with everything needed for a quick and easy installation


Automatic Emergency Heat – Keep guests comfortable with a heating option that uses electric resistance heat in heat pump mode

Freeze and Frost Protection – Automatic freeze and indoor frost control keep units operating in peak condition

Auto Power Recovery – In case of power failures, units automatically resume their operation when power restores, reducing maintenance calls

Self Diagnostics – Quickly and easily identify service needs with a nine-point diagnostic code system

Backed by an Industry Leader – With a long history of creating durable products at an affordable price, Hotpoint is your trusted PTAC brand

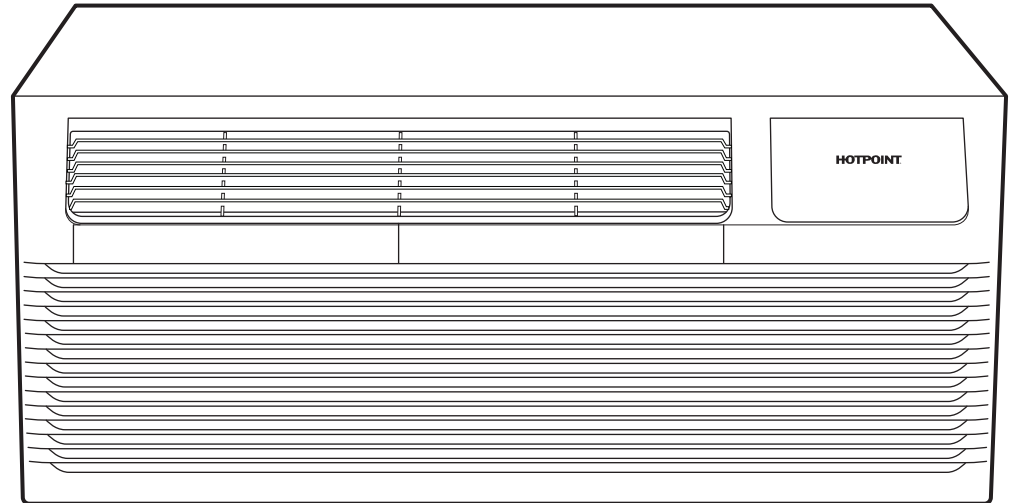

# Hotpoint®